



General Description

Series D1FC (NG06) direct operated, proportional directional control valve with digital onboard electronics and position feedback provides high dynamics combined with high flow.


The LVDT is completely integrated into the housing and therefore, it does not require an exposed cable connection. Thus an unintended disconnection is unlikely.


The digital onboard electronics is situated in a robust metal housing, which allows the usage in rough environmental conditions. The nominal values are factory set. The cable connection to a serial RS-232 interface is available as accessory.



Features

- Progressive flow characteristics for sensitive adjustment.
- Low hysteresis.
- High dynamics.
- High flow capacity.
- Compact size.

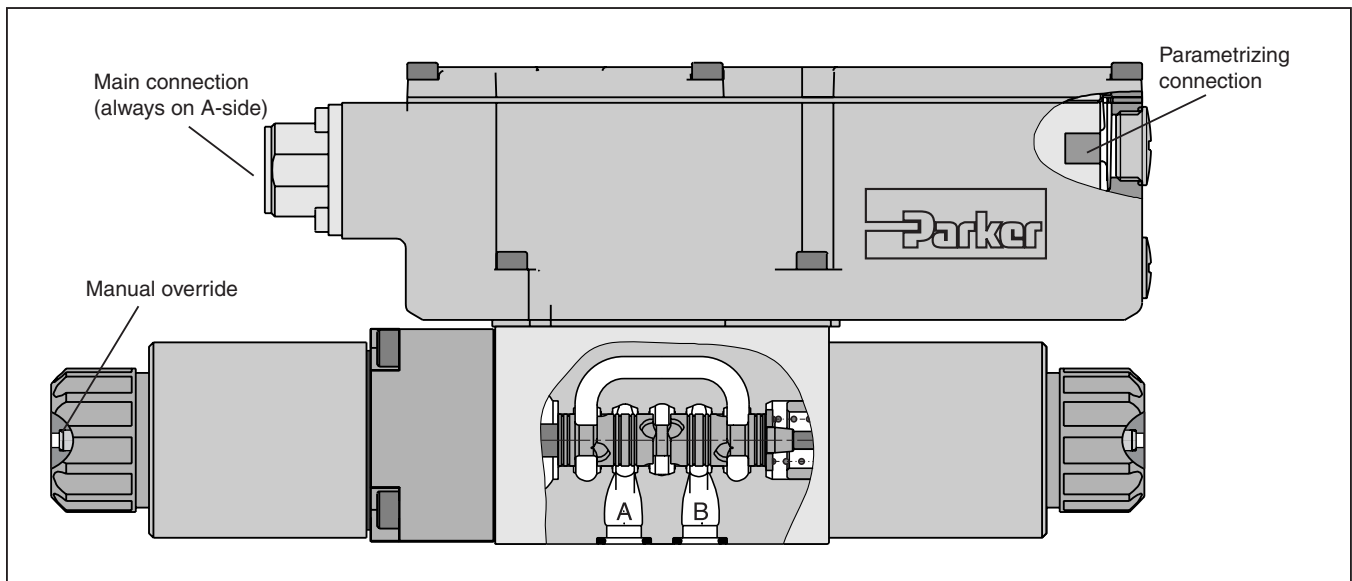

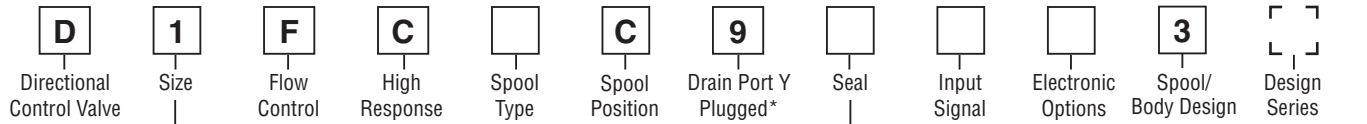

Code	Description
1	DIN NG6 CETOP 3 NFPA D03

Code	Spool	Flow LPM (GPM) at Δp 5 Bar (72.5 PSI) per metering edge
Overlap		
E01F E01H E01K		10 (2.6) 20 (5.3) 30 (7.9)
E02F E02H E02K		10 (2.6) 20 (5.3) 30 (7.9)
B31F B31H B31K	$Q_B = Q_A / 2$ 	5 / 10 (1.3 / 2.6) 10 / 20 (2.6 / 5.3) 15 / 30 (4.0 / 7.9)
B32F B32H B32K	$Q_B = Q_A / 2$ 	5 / 10 (1.3 / 2.6) 10 / 20 (2.6 / 5.3) 15 / 30 (4.0 / 7.9)

Code	Description
N	Nitrile
V	Fluorocarbon

Code	Signal	Function
B	0...±10V	0...+10V P -> A
E	0...±20mA	0...+20mA P -> A
S	4...20mA	12...20mA P -> A

Code	Description
0	6+PE acc. EN175201-804
5	11+PE acc. EN175201-804
7	6+PE + Enable acc. EN175201-804

Please order connector separately. See Accessories.

Parametrizing cable OBE => RS-232
 Item no. 40982923

* Needs to be removed at tank pressure >35 Bar (507.5 PSI).

Bolt Kit:

- BK209 (4) 10-24x1.25 SHCS
- BK375 (4) M5x30

Weight:

D1FC 3.4 kg (7.5 lbs.)



General			
Design		Direct operated proportional DC valve	
Actuation		Proportional solenoid	
Size		NG6 / CETOP 3 / NFPA D03	
Mounting Interface		DIN 24340 / ISO 4401 / CETOP RP121 / NFPA	
Mounting Position		Unrestricted	
Ambient Temperature Range		[°C]	-20...+60 (-4°F...+122°F)
MTTF Value ¹⁾		Years	150
Vibration Resistance		[g]	10 Sinus 5...2000 Hz acc. IEC 68-2-6 30 Random noise 20 to 2000 Hz acc. IEC 68-2-36 15 Shock acc. IEC 68-2-27
Hydraulic			
Maximum Operating Pressure		Internal Ports P, A, B: 350 Bar (5075 PSI); port T: max. 35 Bar (508 PSI) External Drain 210 Bar (3045 PSI); port Y: max. 35 Bar (508 PSI)	
Maximum Pressure Drop PABT / PBAT		350 Bar (5075 PSI)	
Fluid		Hydraulic oil as per DIN 51524...51535, other on request	
Fluid Temperature		[°C]	-20...+60 (-4°F...+140°F); Nitrile -25...+60 (-13°F...+140°F)
Viscosity		Permitted Recommended	[cSt] / mm ² /s [cSt] / mm ² /s
			20...400 (93...1854 SSU) 30...80 (139...371 SSU)
Filtration		ISO Class 4406 (1999) 18/16/13	
Nominal Flow at Δp=5 Bar (72.5 PSI) per control edge ²⁾		10/20/30 LPM (2.6/5.3/7.9 GPM)	
Leakage at 100 Bar (1450 PSI)		[ml/min]	<60 (3.7 cu.in.)
Opening point		[%]	set to 10 command signal (see performance curves)
Static / Dynamic			
Step Response at 100% Stroke ³⁾		[ms]	20
Hysteresis		[%]	< 0.1
Temperature Drift		[%/K]	< 0.01
Electrical			
Duty Ratio		[%]	100
Protection Class		IP65 in accordance with EN 60529 (plugged and mounted)	
Supply Voltage / Ripple		[V]	18...30, electric shut-off at <17, ripple < 5% eff., surge free
Current Consumption Maximum		[A]	2.0
Pre-Fusing Medium Lag		[A]	2.5
Input Signal			
Code B	Voltage Impedance	[V] [kOhm]	+10...0...-10, ripple < 0.01% eff., surge free, 0...+10V P→A 100
Code S	Current Impedance	[mA] [Ohm]	4...12...20, ripple < 0.01% eff., surge free, 12...20 mA P→A < 3.6 mA = enable off, > 3.8 mA = enable on acc. NAMUR NE43 200
Code E	Current Impedance	[mA] [Ohm]	+20...0...-20, ripple < 0.01% eff., surge free, 0...+20 mA P→A 200
Differential Input Maximum			
Code 0 / 7		[V]	30V for terminal D and E against PE (terminal G) 11V for terminal D and E against 0V (terminal B)
Code 5		[V]	30V for terminal 4 and 5 against PE (terminal W) 11V for terminal 4 and 5 against 0V (terminal 2)
Adjustment Ranges			
Minimum		[%]	0...50
Maximum		[%]	50...100
Ramp		[S]	0...32.5
Parametrizing Interface		RS-232, parametrizing connection 5 pole	
Enable Signal		Code 5 / 7	[V]
			5...30
Diagnostic Signal			[V]
			+10...0...-10 / +12.5 error detection, rated maximum 5 mA
EMC		EN 61000-6-2, EN 61000-6-4	
Electrical Connection		Code 0 / 7 Code 5	
			6 + PE acc. to EN 175201-804 11 + PE acc. to EN 175201-804
Wiring Minimum		[mm ²]	7 x 1.0 (AWG16) overall braid shield
Wiring Length Maximum		[m]	50 (164 ft.)

¹⁾ If valves with onboard electronics are used in safety-related parts of control systems, in case the safety function is requested, the valve electronics voltage supply is to be switched off by a suitable switching element with sufficient reliability.

²⁾ Flow rate for different Δp per control edge:
$$Q_x = Q_{Nom.} \cdot \sqrt{\frac{\Delta p_x}{\Delta p_{Nom.}}}$$


³⁾ Measured with load 210 Bar (3045 PSI) pressure drop; two control edges.

(Electronically set to opening point 10%)

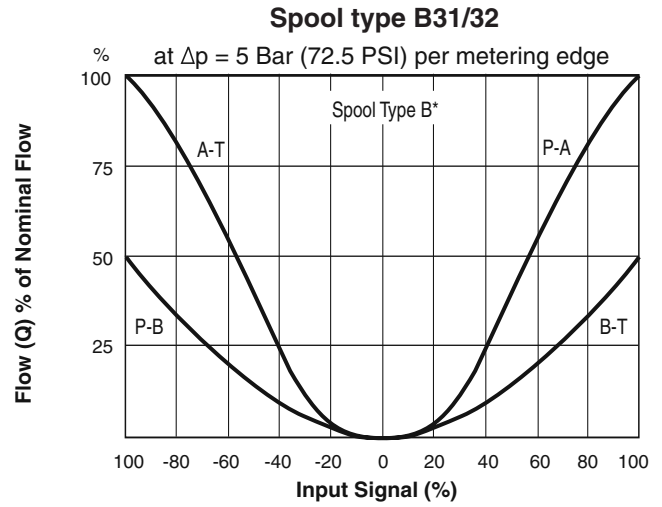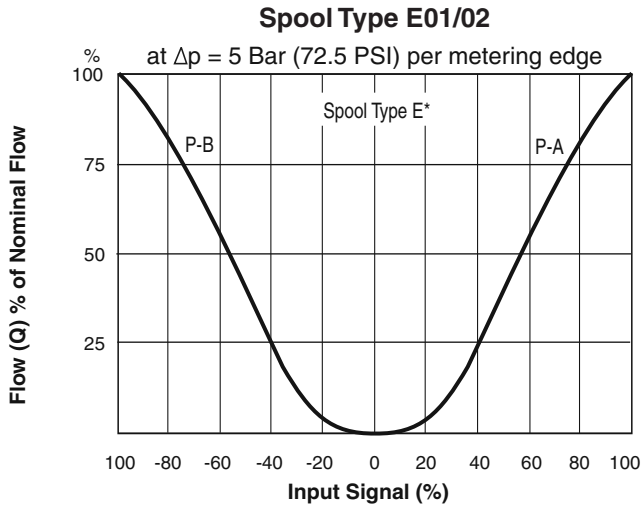


Functional limits

25%, 50%, 75% and 100% command signal (symmetric flow).
 At asymmetric flow a reduced flow limit has to be considered.

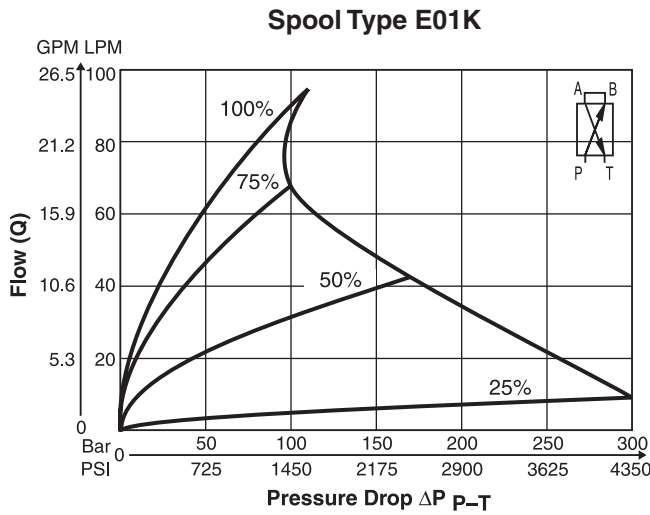


All characteristic curves measured with HLP46 at 50 °C.


**Code 0
 6 + PE acc. EN 175201-804**

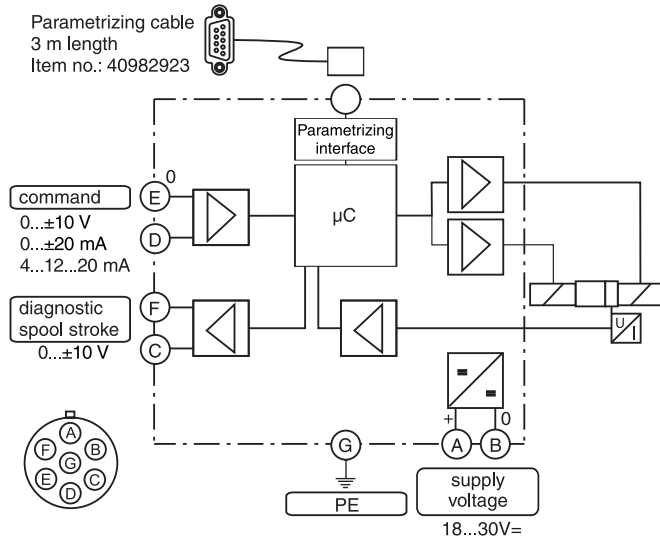

**Code 5
 11 + PE acc. EN 175201-804**

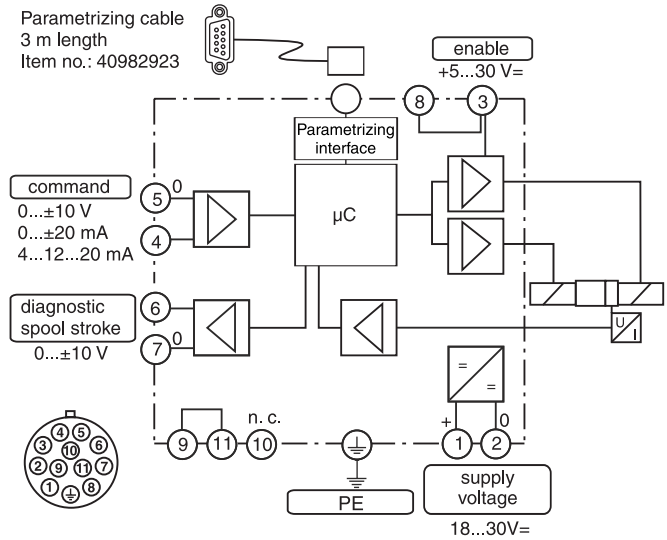

**Code 7
 6 + PE acc. EN 175201-804 + Enable**

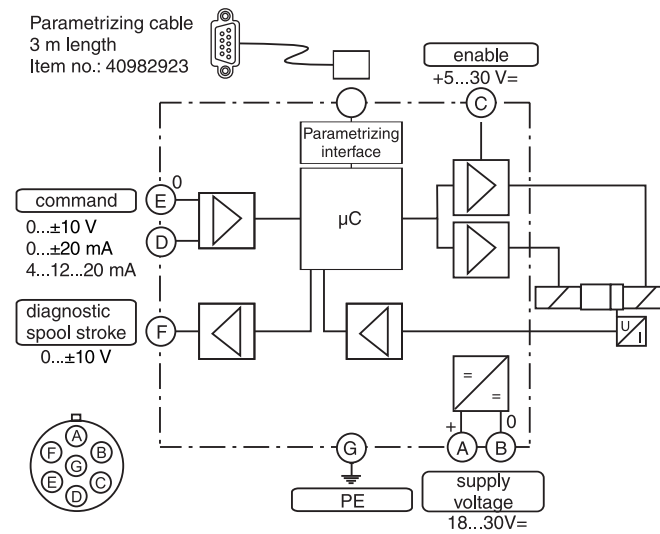

ProPxD Interface Program


The ProPxD software allows quick and easy setting of the digital valve electronics. Individual parameters as well as complete settings can be viewed, changed and saved via the comfortable user interface. Parameter sets saved in the non-volatile memory can be loaded to other valves of the same type or printed out for documentation purposes.

Features

- Simple editing of all parameters.
- Storage and loading of optimized parameter adjustments.
- Executable with all Windows® operating systems from Windows® 95 upwards.
- Communication between PC and electronics via serial interface RS-232.

The valve electronics cannot be connected to a PC with a standard USB cable – this can result in damages of PC and/or valve electronics.

Simple to use interface program. Download free of charge www.parker.com/euro_hcd → **Services** → **downloads**



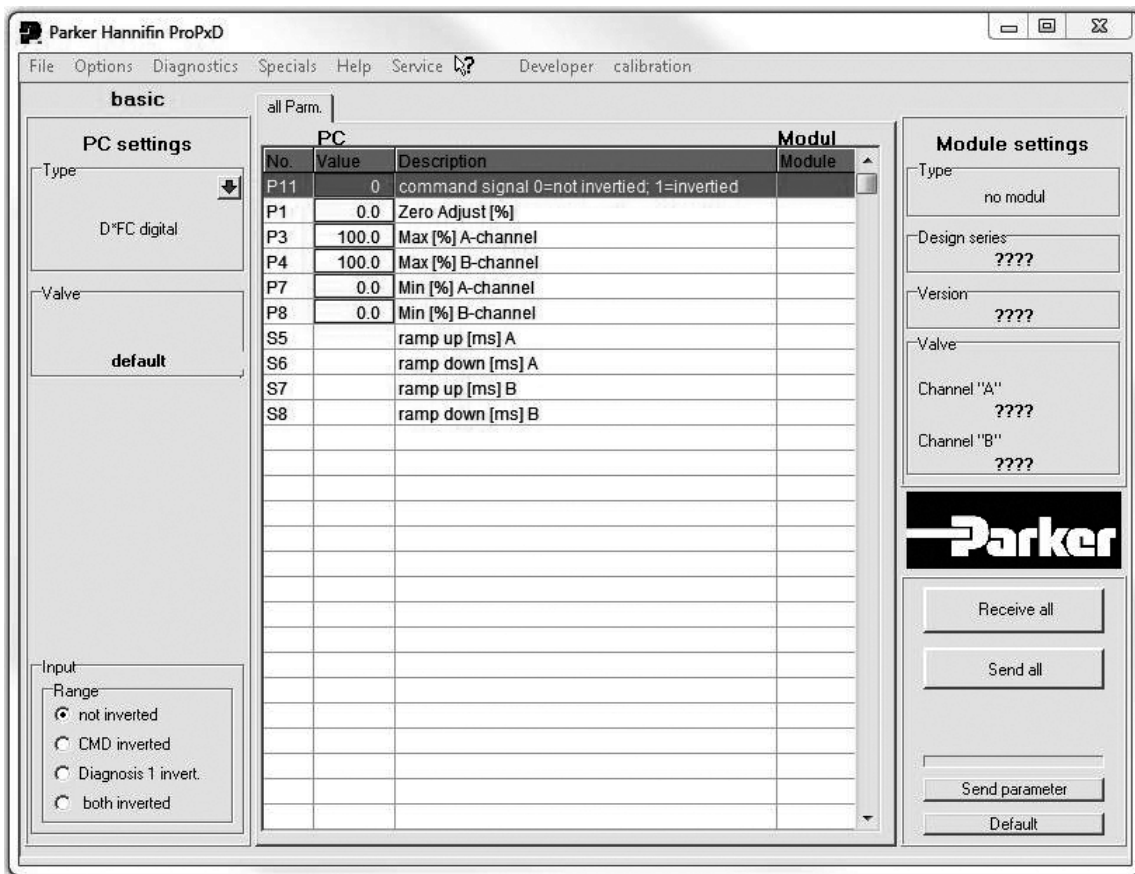


The parametrizing cable may be ordered under item no. 40982923.

Dimensions

**Proportional Directional Control Valves
Series D1FC**

Inch equivalents for millimeter dimensions are shown in (**)

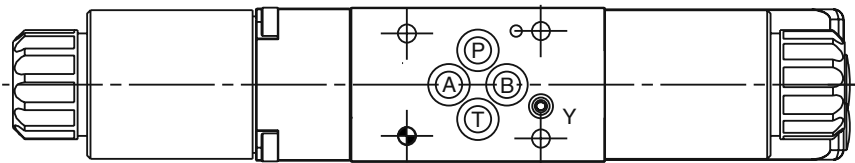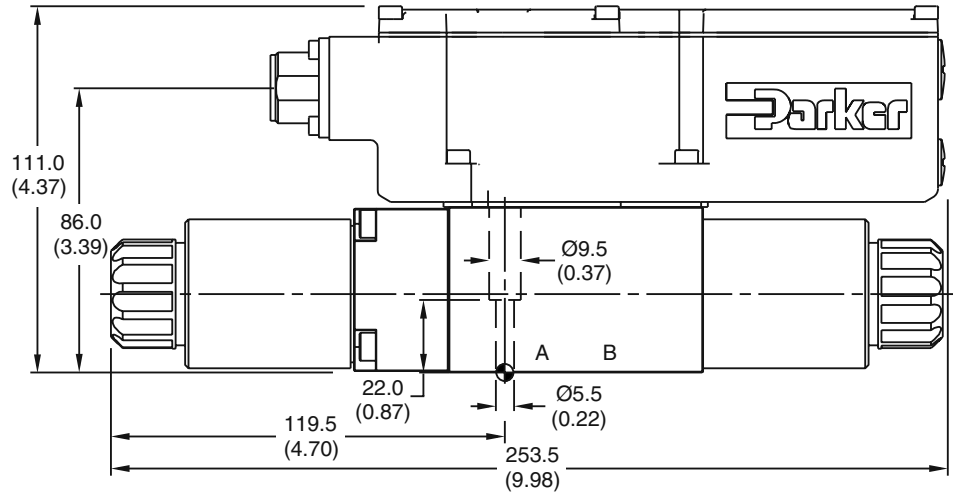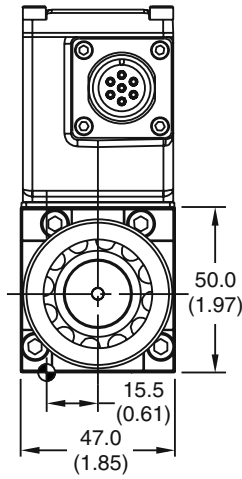

Port Y plugged

Remove and use Y Port if tank pressure > 35 Bar (507 PSI)



Surface Finish	Kit	Wrench	Torque	Seal Kit
	BK375 BK209	4x M5x30 DIN 912 12.9 4x 10-24x1.25	7.6 Nm (5.6 lb.-ft.) ±15 %	Nitrile: SK-D1FC Fluorocarbon: SK-D1FC-V



WARNING – USER RESPONSIBILITY

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

- This document and other information from Parker-Hannifin Corporation, its subsidiaries and authorized distributors provide product or system options for further investigation by users having technical expertise.
- The user, through its own analysis and testing, is solely responsible for making the final selection of the system and components and assuring that all performance, endurance, maintenance, safety and warning requirements of the application are met. The user must analyze all aspects of the application, follow applicable industry standards, and follow the information concerning the product in the current product catalog and in any other materials provided from Parker or its subsidiaries or authorized distributors.
- To the extent that Parker or its subsidiaries or authorized distributors provide component or system options based upon data or specifications provided by the user, the user is responsible for determining that such data and specifications are suitable and sufficient for all applications and reasonably foreseeable uses of the components or systems.

OFFER OF SALE

The items described in this document are hereby offered for sale by Parker-Hannifin Corporation, its subsidiaries or its authorized distributors. This offer and its acceptance are governed by the provisions stated in the detailed "Offer of Sale" elsewhere in this document or available at www.parker.com/hydraulicvalve.

SAFETY GUIDE

For safety information, see Safety Guide SG HY14-1000 at www.parker.com/safety or call 1-800-CParker.



Parker Hannifin Corporation
Hydraulic Valve Division
520 Ternes Avenue
Elyria, Ohio 44035 USA
Tel: 440 366 5100
Fax: 440 366 5253
www.parker.com/hydraulicvalve

