

Fittings and Tubing

High Pressure Cone & Thread

Pressures to 60,000 psi (4140 bar)
Includes Check Valves, Filters & Couplings



Principle of Operation:


Parker Autoclave Engineers High Pressure connection is a refinement of the original cone & thread joint which has been the standard connection in high pressure technology since its development by an agency of the US Government over 90 years ago. This design set precedence of quality and reliability found in all Parker Autoclave Engineers products to this day.

The pressure handling capabilities of this connection design have been applied successfully to control pressures in excess of 150,000 psi. All-metal sealing and working temperatures from -423° to 1200°F (-252° to 650°C), along with many different material options make this connection one of the most versatile ever. Fittings and tubing found in this section are designed using ASME B31.3 Chapter IX standards to be compatible with all of our High Pressure Valve and Fitting configurations.

High Pressure Fittings and Tubing Features:

- Utilize "F" Style High Pressure Coned-and-Threaded connections (see Tools & Installation for port dimensions)
- Available sizes are 1/4, 3/8, 9/16, and 1 inch nominal outside diameter tubing
- Standard Fitting Material is UNS S31600 with Tubing manufactured using UNS S31600/S31603, 316/316L stainless steel material, cold worked to Parker Autoclave proprietary standards. UNS S30400/S30403, 304 SS tubing is available
- Operating Temperatures from -423°F to 1200°F (-252° to 650°C)
- Anti-vibration connection components available, see pages 15 & 16
- High pressure, High cycle Autofrettagged tubing available along with many material options.
- Fitting and Tubing options for 100,000 and 150,000 psi applications available, see Ultra High Fitting brochure

All Parker Autoclave Engineers fittings are marked with manufacturers name, part number, material, heat code and maximum pressure for complete traceability.

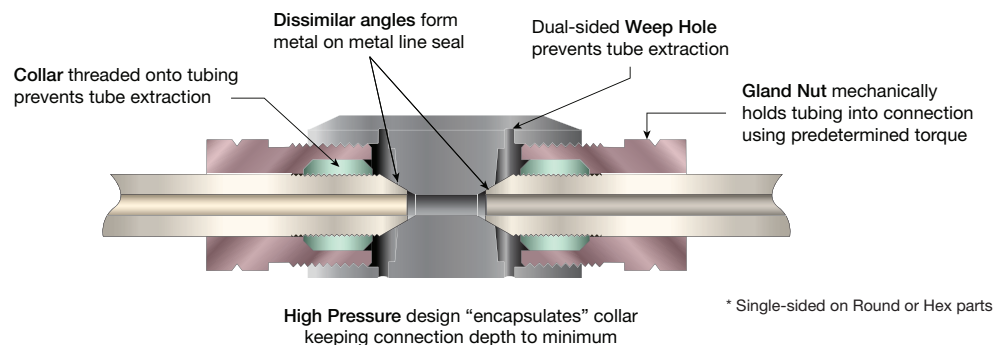

ENGINEERING YOUR SUCCESS.

Fittings

High Pressure Fittings - Pressures to 60,000 psi (4140 bar)



Parker Autoclave Engineers High Pressure Cone & Thread Fittings, Couplings, Filters and Valves utilize the F Style Cone & Thread Connection Detail (see Tools & Installation brochure for dimensions). These fittings are compatible with Series 30SC, 43SC, 30VM, 40VM, and 60VM valves and Parker Autoclave Engineers high pressure tubing.

For instructions on how to make this High Pressure Cone & Thread connection see the step by step instructions on page 7.

High Pressure Connection Components:

All valves and fittings are supplied complete with appropriate gland and tubing collar. To order these components separately, use part numbers listed below. When using plug, collar is not required. Tubing Pressure Caps can be found in Adapter brochure.

| Connection Type | Gland | Collar | Plug | Connection Components (Industry Standard) |
|--|----------------------------------|----------------------------------|---|--|
| | | | Socket Head Flush Plug version, add "-F" suffix | |
| F250C (1/4 HP) F375C (3/8 HP) F562C (9/16 HP) F562C40 (9/16 HP) | AGL40 AGL60 AGL90 AGL90 | ACL40 ACL60 ACL90 ACL90 | AP40 AP60 AP90 AP90 | For use in all Parker Autoclave Engineers High Pressure Cone & Thread Fittings, Adapters and Valves up to 60,000 psi |

| | | | | |
|------------------|---------|---------|---------|---|
| | | | | |
| F1000C43 (1" HP) | CGLX160 | CCLX160 | 43CP160 | 1" Medium Pressure collar and gland design is suitable for use in all Parker Autoclave Engineers 1" High Pressure Cone & Thread Fittings, Adapters, and Valves up to 43,000 psi maximum |

Notes:

To ensure proper fit use Parker Autoclave Engineers tubing.

For gland nut hex sizes and torque values, see "Tools and Installation" brochure.

All Cone and Thread ports MUST utilize weep holes for safety. When weep hole is not available, we offer a gland nut with a "Slotted Male Thread" that provides this safety feature without the need for the separate port. Use suffix "-SMT" with Gland part number when needed.

All PAE High Pressure Fittings and Tubing can be made with materials suitable for NACE/ISO 15156 requirements. As per NACE and ISO-15156, it is contingent on the end user to select this material. As this compatibility limits the use of "cold worked" materials, most of the choices come with significant pressure reductions. Please consult our Technical Brochure where we identify the more popular annealed materials along with the pressure reduction. Our Sour Oil and Gas brochure has a more complete description of the available options for pressures up to 30,000 psi.

Special Materials: Special Material Fittings are normally supplied with CW 316 SS Glands and Collars as these parts do not touch flowing (wetted) media. To match the same material as selected for body, use either "-SOG" (Sour Oil or Gas - NACE) or "-AP" (All Parts) suffix. Special material glands and adapter bodies are normally supplied with four flats (square) in place of standard hex. Include option suffix "-H" if hex is required.

If vibration is inherent in the application, please see information on Antivibration Gland Fittings on pages 15 and 16 of this brochure.

NACE/ISO 15156 Compatibility

All PAE High Pressure Fittings and Tubing can be made with materials suitable for NACE/ISO 15156 requirements. As per NACE and ISO-15156, it is contingent on the end user to select suitable material for service. As this compatibility limits the use of "cold worked" materials, most material choices come with significant pressure reductions. Please consult our Technical Brochure where we identify the more popular annealed materials along with the pressure reduction.

NACE Suffix and Special Materials Options:


"-SOG" (Sour Oil & Gas) suffix converts all pressure containing parts from cold worked 3166 SS to annealed condition material, requires hardness check, and NACE certificate is generated for each part. Pressure reductions of 50% (30,000 psi) are possible.

"-AP" (All Parts) suffix converts all fitting and most valve materials to the selected material. Normally, collar and gland remain as cold worked 316 SS as they are not "wetted" parts. This option does not get the Hardness verification and no NACE certificate is generated.

Contact factory for other pressure/material options.

90° Elbow: 45° Elbows are available - replace 00 with 45 (ie; CL6645 or 43CL1645)

| Catalog Number | Connection Type | Outside Diameter Tube | Pressure Rating psi (bar)* | Minimum Opening | Dimensions - inches (mm) | | | | | | Block Thickness |
|----------------|-----------------|-----------------------|----------------------------|-----------------|--------------------------|------------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| | | | | | A | B | C | D Typical | E | F | |
| CL4400 | F250C | 1/4 (6.35) | 60,000 (4140) | .094 (2.39) | 1.00 (25.40) | 1.50 (38.10) | 0.50 (12.70) | 0.63 (16.00) | 0.62 (15.75) | 0.88 (22.35) | 0.75 (19.05) |
| CL6600 | F375C | 3/8 (9.53) | 60,000 (4140) | .125 (3.18) | 1.50 (38.10) | 2.00 (50.80) | 0.52 (13.21) | 0.81 (20.62) | 1.00 (25.40) | 1.25 (31.75) | 1.00 (25.40) |
| CL9900 | F562C | 9/16 (7.94) | 60,000 (4140) | .188 (4.78) | 1.88 (47.75) | 2.62 (66.55) | 0.81 (20.57) | 1.19 (30.23) | 1.12 (28.45) | 1.88 (47.75) | 1.50 (38.10) |
| 40CL9900 | F562C40 | 9/16 (7.94) | 40,000 (2760) | .250 (6.35) | 1.88 (47.75) | 2.62 (66.55) | 0.81 (20.57) | 1.19 (30.23) | 1.12 (28.45) | 1.88 (47.75) | 1.50 (38.10) |
| 43CL16 | F1000C43 | 1 (25.40) | 43,000 (2965) | .438 (11.13) | 3.00 (76.20) | 4.12 (104.65) | 0.72 (18.29) | 1.38 (35.05) | 2.06 (52.32) | 2.06 (52.32) | 1.75 (44.45) |




Note: Fittings such as 45° elbows, reducer elbows, and reducer 45° elbows are available upon request. For mounting hole option add suffix - **PM** to catalog number, consult factory for mounting hole dimensions.

*Maximum pressure rating is based on the lowest rating of any component. Actual working pressure may be determined by tubing pressure rating, if lower. All dimensions for reference only and subject to change. For prompt service, Parker Autoclave Engineers stocks select products. Consult your local representative.

Tee


| Catalog Number | Connection Type | Outside Diameter Tube | Pressure Rating psi (bar)* | Minimum Opening | Dimensions - inches (mm) | | | | | | Block Thickness |
|----------------|-----------------|-----------------------|----------------------------|-----------------|--------------------------|------------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| | | | | | A | B | C | D Typical | E | F | |
| CT4440 | F250C | 1/4 (6.35) | 60,000 (4140) | .094 (2.39) | 1.25 (31.75) | 2.00 (50.80) | 0.50 (12.70) | 0.63 (16.00) | 0.88 (22.35) | 1.00 (25.40) | 1.00 (25.40) |
| CT6660 | F375C | 3/8 (9.53) | 60,000 (4140) | .125 (3.18) | 1.56 (39.62) | 2.00 (50.80) | 0.52 (13.21) | 0.81 (20.62) | 1.06 (26.92) | 1.00 (25.40) | 1.00 (25.40) |
| CT9990 | F562C | 9/16 (7.94) | 60,000 (4140) | .188 (4.78) | 2.12 (53.85) | 2.62 (66.55) | 0.81 (20.57) | 1.19 (30.23) | 1.38 (35.05) | 1.31 (33.27) | 1.50 (38.10) |
| 40CT9990 | F562C40 | 9/16 (7.94) | 40,000 (2760) | .250 (6.35) | 2.12 (53.85) | 2.62 (66.55) | 0.81 (20.57) | 1.19 (30.23) | 1.38 (35.05) | 1.31 (33.27) | 1.50 (38.10) |
| 43CT16 | F1000C43 | 1 (25.40) | 43,000 (2965) | .438 (11.13) | 3.00 (76.20) | 4.12 (104.65) | 0.72 (18.29) | 1.38 (35.05) | 2.06 (52.32) | 2.06 (52.32) | 1.75 (44.45) |

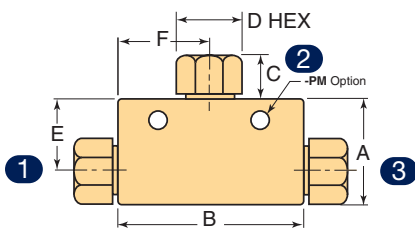

*Maximum pressure rating is based on the lowest rating of any component. Actual working pressure may be determined by tubing pressure rating, if lower. All dimensions for reference only and subject to change. For mounting hole option add suffix - **PM** to catalog number. Consult factory for mounting hole dimensions. To order Tee with different size connections of same type, change part number size codes using order shown in drawing, ie: CT6960 would build Tee with 9/16" HP branch and 3/8" HP runs. For Connection Torque requirements please see "Tools and Installation" brochure.

Cross


| Catalog Number | Connection Type | Outside Diameter Tube | Pressure Rating psi (bar)* | Minimum Opening | Dimensions - inches (mm) | | | | | | Block Thickness |
|----------------|-----------------|-----------------------|----------------------------|-----------------|--------------------------|---------------|--------------|-----------|--------------|--------------|-----------------|
| | | | | | A | B | C | D Typical | E | F | |
| CX4444 | F250C | 1/4 (6.35) | 60,000 (4140) | .094 (2.39) | 1.25 (31.75) | 2.00 (50.80) | 0.50 (12.70) | 0.63 (16) | 0.62 (15.75) | 1.00 (25.40) | 1.00 (25.40) |
| CX6666 | F375C | 3/8 (9.53) | 60,000 (4140) | .125 (3.18) | 2.12 (53.85) | 2.00 (50.80) | 0.52 (13.21) | 0.81 (21) | 1.06 (26.92) | 1.00 (25.40) | 1.00 (25.40) |
| CX9999 | F562C | 9/16 (7.94) | 60,000 (4140) | .188 (4.78) | 2.75 (69.85) | 2.62 (66.55) | 0.81 (20.57) | 1.19 (31) | 1.38 (35.05) | 1.31 (33.27) | 1.50 (38.10) |
| 40CX9999 | F562C40 | 9/16 (7.94) | 40,000 (2760) | .250 (6.35) | 2.75 (69.85) | 2.62 (66.55) | 0.81 (20.57) | 1.19 (31) | 1.38 (35.05) | 1.31 (33.27) | 1.50 (38.10) |
| 43CX16 | F1000C43 | 1 (25.40) | 43,000 (2965) | .438 (11.13) | 4.12 (104.65) | 4.12 (104.65) | 0.72 (18.29) | 1.38 (35) | 2.06 (52.32) | 2.06 (52.32) | 1.75 (44.45) |

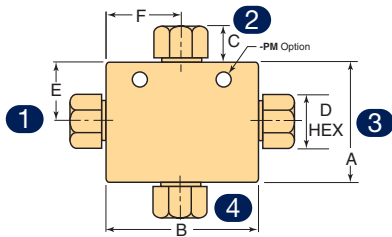

*Maximum pressure rating is based on the lowest rating of any component. Actual working pressure may be determined by tubing pressure rating, if lower. For prompt service, Parker Autoclave Engineers stocks select products. Consult your local representative. For mounting hole option add suffix -PM to catalog number. Consult factory for mounting hole dimensions. To order Cross with different size connections of same type, change part number size codes using order shown in drawing, ie: CX6969 would build a Cross with 9/16" HP alternating with 3/8" HP. For Connection Torque requirements please see "Tools and Installation" brochure.

Bulkhead Coupling


| Catalog Number | Connection Type | Outside Diameter Tube | Pressure Rating psi (bar)* | Minimum Opening | Dimensions - inches (mm) | | | | | | |
|----------------|-----------------|-----------------------|----------------------------|-----------------|--------------------------|--------------|--------------|-----------|--------------|--------------|--------------|
| | | | | | A | B | C | D Typical | E | F Hex | G Thickness |
| 60BF4433 | F250C | 1/4 (6.35) | 60,000 (4140) | .094 (2.39) | 0.94 (2.39) | 1.88 (47.75) | 0.50 (12.70) | 0.63 (16) | 0.50 (12.70) | 1.00 (25.40) | 0.38 (9.65) |
| 60BF6633 | F375C | 3/8 (9.53) | 60,000 (4140) | .125 (3.18) | 1.12 (28.45) | 2.38 (60.45) | 0.53 (13.46) | 0.81 (21) | 0.78 (19.81) | 1.38 (35.05) | 0.38 (9.65) |
| 60BF9933 | F562C | 9/16 (7.94) | 60,000 (4140) | .188 (4.78) | 1.69 (42.93) | 2.75 (69.85) | 0.81 (20.57) | 1.19 (31) | 1.00 (25.40) | 1.88 (47.75) | 0.38 (9.65) |
| 40BF9933 | F562C40 | 9/16 (7.94) | 40,000 (2760) | .250 (6.35) | 1.69 (42.93) | 2.75 (69.85) | 0.81 (20.57) | 1.19 (31) | 1.00 (25.40) | 1.88 (47.75) | 0.38 (9.65) |
| 43BF16 | F1000C43 | 1 (25.40) | 43,000 (2965) | .438 (11.13) | 1.94 (49.28) | 3.50 (88.90) | 0.72 (18.29) | 1.38 (35) | 1.50 (38.10) | 2.13 (54.10) | 0.50 (12.70) |



*Maximum pressure rating is based on the lowest rating of any component. Actual working pressure may be determined by tubing pressure rating, if lower. All dimensions for reference only and subject to change. For prompt service, Parker Autoclave Engineers stocks select products. Consult your local representative.

Straight Coupling / Union Coupling (see assembly drawing below)


| Catalog Number | Connection Type | Outside Diameter Tube | Pressure Rating psi (bar)* | Minimum Opening | Dimensions - inches (mm) | | | | Coupling Type |
|---------------------|-----------------|-----------------------|----------------------------|-----------------|--------------------------|-----------------|-----------------|--------------|-------------------|
| | | | | | A | B | C | D Typical | |
| 60F4433 60UF4433 | F250C | 1/4 (6.35) | 60,000 (4140) | .094 (2.39) | 0.75 (19.05) | 1.38 (35.05) | 0.50 (12.70) | 0.63 (16) | Straight Union |
| 60F6633 60UF6633 | F375C | 3/8 (9.53) | 60,000 (4140) | .125 (3.18) | 1.00 (25.40) | 1.75 (44.45) | 0.53 (13.46) | 0.81 (21) | Straight Union |
| 60F9933 60UF9933 | F562C | 9/16 (7.94) | 60,000 (4140) | .188 (4.78) | 1.38 (35.05) | 2.19 (55.63) | 0.81 (20.57) | 1.19 (31) | Straight Union |
| 40F9933 40UF9933 | F562C40 | 9/16 (7.94) | 40,000 (2760) | .250 (6.35) | 1.38 (35.05) | 2.19 (55.63) | 0.81 (20.57) | 1.19 (31) | Straight Union |
| 43F16 43UF16 | F1000C43 | 1 (25.40) | 43,000 (2965) | .438 (11.13) | 1.75 (44.45) | 3.50 (88.90) | 0.72 (18.29) | 1.38 (35) | Straight Union |

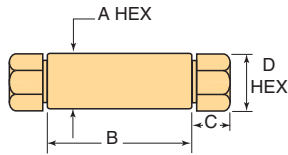

Note: Union Couplings are designed with a removable seat insert allowing disassembly and tubing removal without the necessity of loosening other items in a line.

*Maximum pressure rating is based on the lowest rating of any component. Actual working pressure may be determined by tubing pressure rating, if lower. All dimensions for reference only and subject to change. For prompt service, Parker Autoclave Engineers stocks select products. Consult your local representative.

Union Coupling Assembly

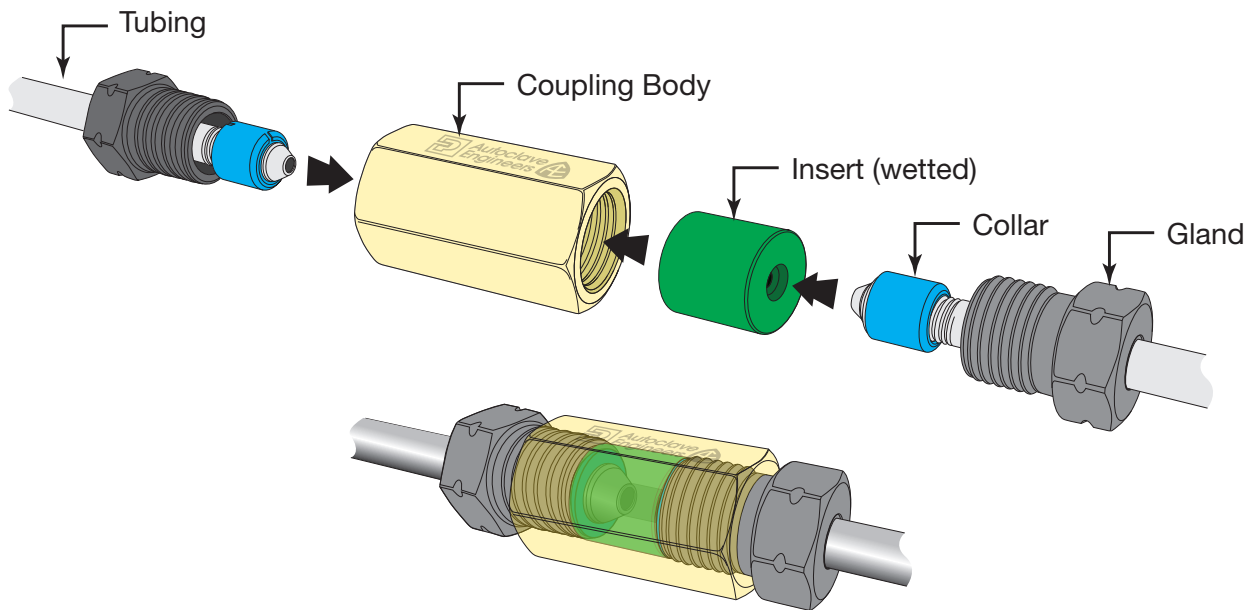

Assembled Union Coupling

Union vs. Straight Coupling Comparison

In much the same as with a traditional Pipe Union, the PAE Union Coupling is used to easily disassemble tubing runs when valves or fittings need to be replaced after original installation. The Body and Insert are two different pieces in the same assembly. The body can slide down tubing leaving only the insert and the tubing tips engaged. Then with only minimal tube shift, the insert drops out allowing the tubing to be removed avoiding the need to disassemble multiple tubing sections from closest elbow.

Note: When Special Materials are requested, the only material that is changed is the Insert (wetted). If “All Parts” are to be requested, include suffix “-AP” or “-SOG” if for NACE/ISO 15156.

Tubing

High Pressure Tubing - Pressures to 60,000 psi (4140 bar)



Parker Autoclave Engineers offers a complete selection of austenitic cold drawn seamless stainless steel tubing designed to match the performance standards of Parker Autoclave valves and fittings. Parker Autoclave high pressure tubing is manufactured of 316/316L (UNS S31600/S31603) and 304/304L (UNS S30400/S30403) specifically for high pressure applications requiring both strength and corrosion resistance. The tubing is furnished in random lengths between 20 feet (6 meters) and 26.5 feet (8.0 meters). The average is 24 feet (7.3 meters). High pressure tubing is available in five sizes and a variety of materials. Special longer lengths are available. Consult factory.

Inspection and Testing:

Parker Autoclave Engineer's high pressure tubing is inspected to assure freedom from seams, laps, fissures or other flaws, as well as carburization or intergranular carbide precipitation. The outside and inside diameters of the tubing are controlled within close tolerances including runout. Sample pieces of tubing for each lot are tested to confirm mechanical properties. Hydrostatic testing is also performed on a statistical basis and is conducted at the working pressure of the tube. Parker Autoclave will perform 100% hydrostatic testing up to 1.5 times working pressure at additional cost if desired.

Special Material:

In addition to the most commonly requested materials we have other material options outlined in our Technical Brochure such as 316 SS (annealed), 6 Moly, Hastelloy C276, and Inconel. These options include materials suitable for use in NACE/ISO 15156 corrosive or stress cracking applications.

Tubing Tolerance:

| Nominal Tubing Size inches (mm) | Tolerance/Outside Diameter inches (mm) |
|------------------------------------|---|
| 1/4 (6.35) | .248/.243 (6.30/6.17) |
| 3/8 (9.53) | .370/.365 (9.40/9.27) |
| 9/16 (14.29) | .557/.552 (14.15/14.02) |
| 1 (25.40) | .995/.990 (25.27/25.14) |

Note:

Standard Tubing is manufactured in accordance with ASME B31.3 Chapter IX standards using UNS S31600/S31603, 316/316L Stainless Steel material, cold worked to Parker Autoclave proprietary standards.

High Pressure Tubing outside diameter dimensions do not meet standard commercial tubing tolerances. Tubing outside dimensions are specifically chosen to meet tube threading die requirements.

Parker Autoclave Engineers components and tubing are designed as a "complete system" for safety and our fittings will not be compatible with standard "commercial" tubing.

Autofrettage for High Pressure High Cycle (HPHC) applications:

If high cycle fatigue life is a concern, Parker Autoclave Engineers can supply tubing which has been autofrettaged for improved fatigue resistance. For internally pressurized tubing, **autofrettage** is a method by which the inner wall of the tube is precompressed to reduce the tube operating bore stresses, thereby increasing cycle life and increasing the life span of the tubing. (every application is different and while life span increases of 40% have been reported, we cannot guarantee any specific increase in tubing life.)

High Pressure Tubing Details: 316/316L & 304/304L Stainless Steel (Cold Worked)

| Catalog Number | Tube Material | Fits Connection Type | Tube Size inches (mm) | | | Flow Area in ² (mm ²) | Working Pressure psi (bar)* | | | |
|----------------|---------------|----------------------|-----------------------|------------------|-----------------|--|------------------------------|------------------|------------------|------------------|
| | | | Outside Diameter | Inside Diameter | Wall Thickness | | -423 to 100°F (-252 to 38°C) | 200°F (93°C) | 400°F (204°C) | 600°F (316°C) |
| MS15-081 | 316SS | F250C | 1/4 (6.35) | 0.083 (2.11) | 0.083 (2.11) | 0.005 (3.23) | 60,000 (4140) | 60,000 (4140) | 57,750 (3982) | 54,250 (3740) |
| MS15-182 | 304SS | | | | | | 60,000 (4140) | 56,800 (3916) | 17,200 (1172) | 50,700 (3496) |
| MS15-087 | 316SS | F375C | 3/8 (9.63) | 0.125 (3.18) | 0.125 (3.18) | 0.012 (7.74) | 60,000 (4140) | 60,000 (4140) | 57,750 (3982) | 54,250 (3740) |
| MS15-183 | 304SS | | | | | | 60,000 (4140) | 56,800 (3916) | 51,650 (3561) | 50,700 (3496) |
| MS15-083 | 316SS | F562C | 9/16 (14.29) | 0.188 (4.78) | 0.187 (4.75) | 0.028 (18.06) | 60,000 (4140) | 60,000 (4140) | 57,750 (3982) | 54,250 (3740) |
| MS15-185 | 304SS | | | | | | 60,000 (4140) | 56,800 (3916) | 51,650 (3561) | 50,700 (3496) |
| MS15-090 | 316SS | F562C40 | 9/16 (14.29) | 0.250 (6.35) | .156 (3.96) | .048 (30.97) | 40,000 (2760) | 40,000 (2760) | 38,500 (2654) | 36,100 (2489) |
| MS15-211 | 316SS | F1000C43 | 1 (25.40) | 0.438 (11.13) | .281 (7.14) | 0.151 (97.42) | 43,000 (2965) | 43,000 (2965) | 43,000 (2965) | 41,380 (2853) |

Note:

- Autofrettagged tubing available (see Technical section: Pressure Cycling for explanation of "Autofrettagage").
- For Ultra-High Pressure, High Cycle (HPHC) tubing above 60,000 psi, see Parker Autoclave Engineers Ultra High Pressure Fittings and Tubing Brochure.
- See Technical Section for Temperature Ratings over 600°F (315°C).

*Maximum pressure rating is based on the lowest rating of any component. Actual working pressure may be determined by tubing pressure rating, if lower. All dimensions for reference only and subject to change. For prompt service, Parker Autoclave Engineers stocks select products. Consult your local representative.

High Pressure Connection: Step by Step Assembly Instructions

| Step 1 | Step 2 | Step 3 | | | | | | | | | | | | |
|---|---|--|--------------|-----------------------------|---------|---------|---------|---------|----------|----------|----------------|---------|-------------|-----------|
| | | | | | | | | | | | | | | |
| <p>Insert Coned and Threaded Nipple through Gland (Typical Tee Fitting Assembly consisting of Fitting Body, Collar, Gland, and Coned and Threaded Nipple or Tube End.)</p> | <p>Thread Collar turning (Reverse Threaded to prevent rotation during torque process) onto Coned and Threaded Nipple end.</p> | <p>For proper Collar placement, thread Collar onto Nipple leaving 1 to 2 full threads exposed on Fitting side of Collar. Lubricate Gland Threads with anti-seize compound and tube tip with process compatible lubricant (do not use metal-flake type)</p> | | | | | | | | | | | | |
| | | <p>High Pressure Gland Torque</p> <p>For 316/316L SS, 2507 Super Duplex Tubing & Adapters</p> <table border="1"> <thead> <tr> <th>Fitting Size</th> <th>Required Torque ft-lb (N.m)</th> </tr> </thead> <tbody> <tr> <td>1/4" HP</td> <td>25 (34)</td> </tr> <tr> <td>3/8" HP</td> <td>50 (68)</td> </tr> <tr> <td>9/16" HP</td> <td>75 (102)</td> </tr> <tr> <td>9/16" HP-40Ksi</td> <td>60 (82)</td> </tr> <tr> <td>1" HP-43Ksi</td> <td>180 (244)</td> </tr> </tbody> </table> <p>For torques and optional materials (lower pressures), see Tools and Installation Catalog 02-0149SE</p> <p>*1" Connection will have collar in front of gland nut but assembles with same process.</p> | Fitting Size | Required Torque ft-lb (N.m) | 1/4" HP | 25 (34) | 3/8" HP | 50 (68) | 9/16" HP | 75 (102) | 9/16" HP-40Ksi | 60 (82) | 1" HP-43Ksi | 180 (244) |
| Fitting Size | Required Torque ft-lb (N.m) | | | | | | | | | | | | | |
| 1/4" HP | 25 (34) | | | | | | | | | | | | | |
| 3/8" HP | 50 (68) | | | | | | | | | | | | | |
| 9/16" HP | 75 (102) | | | | | | | | | | | | | |
| 9/16" HP-40Ksi | 60 (82) | | | | | | | | | | | | | |
| 1" HP-43Ksi | 180 (244) | | | | | | | | | | | | | |
| <p>Insert Tube/Gland assembly into Fitting body, turning clockwise approximately 4-5 threads (if unable to turn full distance by hand, look for misalignment issues with tubing and correct for proper seal).</p> | <p>Use Torque Wrench to properly set (see chart in next frame) Cone & Thread Connections. (Available with wrench adapters in Tools and Installation brochure)</p> | | | | | | | | | | | | | |

Coned-and-Threaded Nipples

High Pressure - Pressures to 60,000 psi (4140 bar)

For rapid system make-up, Parker Autoclave Engineers supplies pre-cut, coned-and-threaded nipples in various sizes and lengths for Parker Autoclave Engineers medium pressure valves and fittings.



Special Lengths:

In addition to the standard lengths listed in the table below, nipples are available in any custom length. Consult factory.

Material:**

Catalog numbers in table refer to Type UNS S31600/S31603, CW 316/316L Stainless steel. Optional materials available. Consult factory.

Nipple Details:

| Catalog Number (316 Stainless Steel) | | | | | |
|---|----------------------|------------------|------------------|------------------|------------------|
| Tube Size inches (mm) | Fits Connection Type | | | | |
| | F250C | F375C | F562C | F562C40 | F1000C43 |
| Outside Diameter | 1/4 (6.35) | 3/8 (9.53) | 9/16 (14.29) | 9/16 (14.29) | 1 (25.40) |
| Inside Diameter | .083 (2.11) | .125 (3.18) | .188 (4.78) | .250 (6.35) | .438 (12.409) |
| Working Pressure at 100°F (38°C) psi (bar)* | 60,000 (4140) | 60,000 (4140) | 60,000 (4140) | 40,000 (2760) | 43,000 (2965) |
| Nipple Length inches (mm) | | | | | |
| 2.75" (69.85) | CN4402-316 | | | | |
| 3.00" (76.20) | CN4403-316 | CN6603-316 | | | |
| 4.00" (101.60) | CN4404-316 | CN6604-316 | CN9904-316 | 40CN9904-316 | |
| 6.00" (152.40) | CN4406-316 | CN6606-316 | CN9906-316 | 40CN9906-316 | 43CN1606-316 |
| 8.00" (203.20) | CN4408-316 | CN6608-316 | CN9908-316 | 40CN9908-316 | 43CN1608-316 |
| 10.00" (254.00) | CN44010-316 | CN66010-316 | CN99010-316 | 40CN99010-316 | 43CN16010-316 |
| 12.00" (304.80) | CN44012-316 | CN66012-316 | CN99012-316 | 40CN99012-316 | 43CN16012-316 |
| 14.00" (355.60) | CN44014-316 | CN66014-316 | CN99014-316 | 40CN99014-316 | 43CN16014-316 |
| 16.00" (406.40) | CN44016-316 | CN66016-316 | CN99016-316 | 40CN99016-316 | 43CN16016-316 |
| 18.00" (457.20) | CN44018-316 | CN66018-316 | CN99018-316 | 40CN99018-316 | 43CN16018-316 |
| 20.00" (508.00) | CN44020-316 | CN66020-316 | CN99020-316 | 40CN99020-316 | 43CN16020-316 |
| 22.00" (558.80) | CN44022-316 | CN66022-316 | CN99022-316 | 40CN99022-316 | 43CN16022-316 |
| 24.00" (609.60) | CN44024-316 | CN66024-316 | CN99024-316 | 40CN99024-316 | 43CN16024-316 |

Notes:

See High Pressure Tubing section of this brochure or Technical Brochure for pressure ratings at various temperatures.

* Maximum pressure rating is based on the lowest rating of any component. Actual working pressure may be determined by tubing pressure rating, if lower.


** Type 304 Stainless Steel nipples available.

*** 40CN99XX nipples use the larger bore (0.250") 9/16" tubing rated at 40,000 psi with standard HP collars and glands.

All dimensions for reference only and subject to change. For prompt service, Parker Autoclave Engineers stocks select products. Consult your local representative.

Check Valves

High Pressure - Pressures to 60,000 psi (4140 bar)

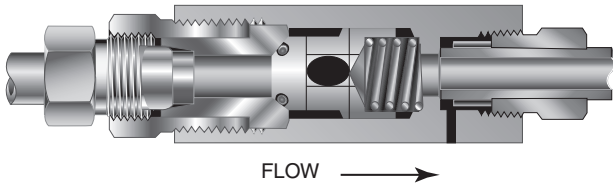

CKO Series O-Ring Check Valve

Ordering part numbers can be found on page 12

Provide unidirectional flow and tight shut-off for liquids and gases with high reliability. When differential drops below cracking pressure*, valve shuts off. **(Not for use as relief valve.)**

Cracking Pressure*: 20 psi (1.38 bar) \pm 30%. Springs for higher cracking pressures up to 100 psi available on special order for O-ring style check valves only.

Temperature Range/O-ring Options:

Viton (FKM) O-ring (std.): 0° to 400°F (-18° to 204°C)

Buna-N O-ring (-**BO** suffix): -20° to 250°F (-29° to 121°C)

FFKM O-ring (-**KO** suffix): 30° to 500°F *(-18° to 260°C)

PTFE O-ring (-**TO** suffix): -100° to 400°F (-73° to 204°C)

PTFE O-ring with Low Temp Spring (-**LTTO** suffix): to -423°F (-252°C)

Installation:

Vertical or Horizontal as required. Flow Direction arrow on valve body.

CAUTION: While testing has shown O-Rings to provide satisfactory service life, both cyclic and shelf life may vary widely with differing service conditions, properties of reactants, pressure and temperature cycling and age of the O-ring.

FREQUENT INSPECTIONS SHOULD BE MADE to detect any deterioration, and O-rings replaced as required.

NOTE: For optional material see Technical Brochure. Special material check valves are normally supplied with four flats in place of standard hex.


Material of Construction:

| Item # | Description | Material |
|--------|------------------|-------------|
| 1 | Check Valve Body | 316 SS |
| 2 | Cover | 316 SS |
| 3 | Poppet | 316 SS |
| 4 | Gland Nut | 316 SS |
| 5 | Spring | 302 SS |
| 6 | O-Ring | 90 Duro FKM |

Typical spare parts found in Repair Kits


Basic O-ring Check Valve Repair Kits:

Check Valves are easily repaired. Add "R" to front of valve catalog number for proper repair kit (example: RCKO9900) See "Cover Torque" on page 12 for re-assembly. Include any catalog number suffix marked on original part when ordering repair kit.

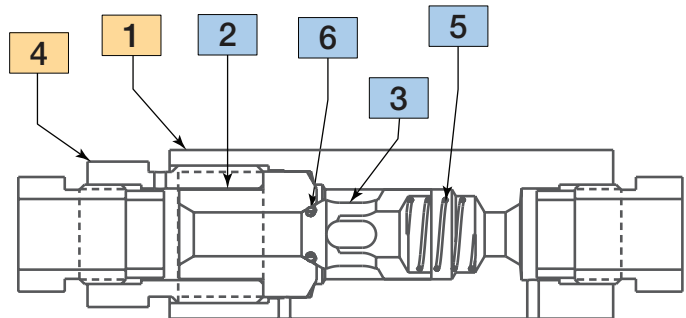

Check Valves

High Pressure - Pressures to 60,000 psi (4140 bar)

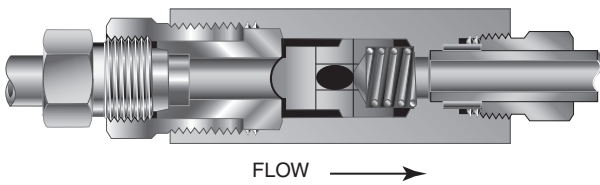

CB Series Ball Check Valve

Ordering part numbers can be found on page 12

Prevent reverse flow **where leak-tight shut-off is not mandatory**. When differential drops below cracking pressure, valve closes. With all-metal components, valve can be used up to 800°F (425°C). See Technical Information section for connection temperature limitations. **(Not for use as relief valve.)**

Ball and poppet are an integral design to assure positive, in-line seating without “chatter”. Poppet is designed essentially for axial flow with minimum pressure drop.

Cracking Pressure*: 20 psi (1.38 bar) +/- 30% No optional cracking pressures available.

Temperature Range: With All-Metal components, valve can be used to 800°F (425°C). Minimum standard operating temperature is -110°F (-79°C). For Low Temperature operation to -423°F (-252°C) use suffix “-LT” (Low Temp Spring)

Installation:

Vertical or Horizontal as required. Flow Direction arrow on valve body.

NOTE: For optional material see Technical Brochure. Special material check valves are normally supplied with four flats in place of standard hex.

Material of Construction:


| Item # | Description | Material |
|--------|------------------|----------|
| 1 | Gland | 316 SS |
| 2 | Gland Nut | 316 SS |
| 3 | Cover | 316 SS |
| 4 | Poppet | 316 SS |
| 5 | Spring | 302 SS |
| 6 | Check Valve Body | 316 SS |

Typical spare parts found in Repair Kits

Basic Ball Check Valve Repair Kits:


Check Valves are easily repaired. Add “R” to front of valve catalog number for proper repair kit (example: RCB9901) See “Cover Torque” on page 12 for re-assembly.

Include any catalog number suffix marked on original part when ordering repair kit.

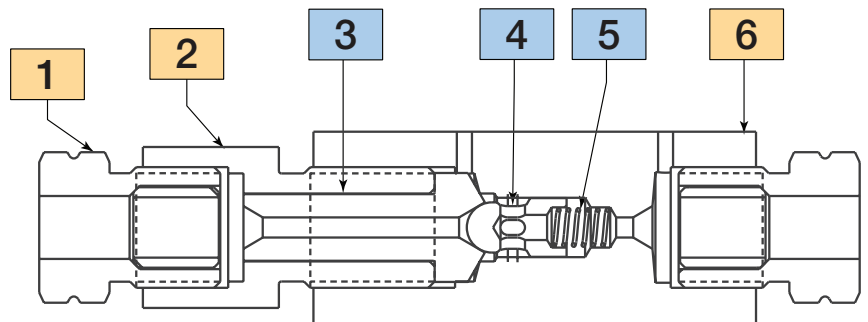

Excess Flow Valves

High Pressure - Pressures to 60,000 psi (4140 bar)

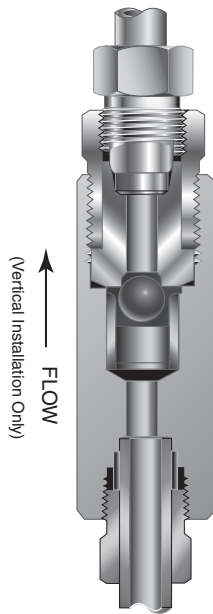

Protects pressure gauges and pressure instrumentation from sudden surges in flow or venting in the event of line failure.

Vertical Installation: Since this type of check valve employs a non-spring loaded ball, valve **MUST** be installed in **VERTICAL** position with arrow on valve body pointing UP. (cover gland up).

Resetting Valve: Equalize the pressure across the ball. The ball will drop and reset automatically. Note: when in checked position, a small flow is permitted through the valve.

Temperature Range: With All-Metal components, Excess Flow Valve can be used from -423° to 800°F (-252° to 425°C).

NOTE: For optional material see Technical Brochure. Special material check valves are normally supplied with four flats in place of standard hex.

CK Series Ball Type Excess Flow Valves (Surge Check)

Ordering part numbers can be found on page 12


Material of Construction:

| Item # | Description | Material |
|--------|---------------------|----------|
| 1 | Gland Nut | 316 SS |
| 2 | Cover | 316 SS |
| 3 | Ball, 1/2" Diameter | 302 SS |
| 4 | Check Valve Body | 316 SS |

Typical spare parts found in Repair Kits

Excess Flow Valve Repair Kits

Excess Flow Valves are easily repaired. Add "R" to front of valve catalog number for proper repair kit (example: RCK9902) See "Cover Torque" on page 12 for re-assembly. Include any catalog number suffix marked on original part when ordering repair kit.

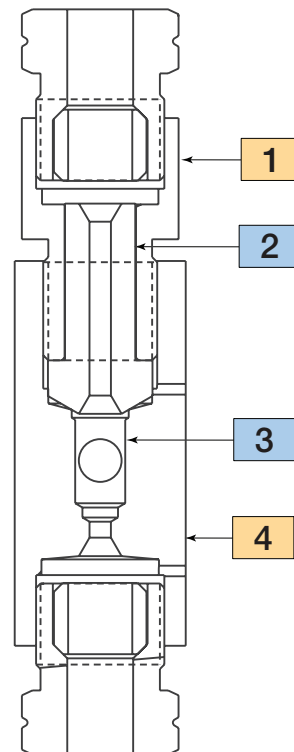

O-Ring Check Valves


| Catalog Number | Fits Connection Type | Pressure Rating psi (bar)** | Orifice inches (mm) | Rated Cv | Cover Gland Torque ft. lb (Nm) | Dimensions - inches (mm) | | | | |
|----------------|----------------------|-----------------------------|---------------------|----------|--------------------------------|--------------------------|---------------|--------------|-----------|------------|
| | | | | | | A | B | C | D Typical | Hex |
| CKO4400 | F250C | 60,000 (4140) | .094 (2.39) | .15 | 110 (150) | 3.38 (85.85) | 2.50 (63.50) | 0.50 (12.70) | 0.63 (16) | 1.18 (30) |
| CKO6600 | F375C | 60,000 (4140) | .125 (3.184) | .28 | 110 (150) | 3.75 (95.25) | 2.62 (66.55) | 0.53 (13.46) | 0.75 (19) | 1.18 (40) |
| CKO9900 | F562C | 60,000 (4140) | .187 (4.75) | .63 | 160 (220) | 4.62 (117.35) | 3.38 (85.85) | 0.81 (20.57) | 1.12 (28) | 1.50 (38) |
| 40CKO9900 | F562C40 | 40,000 (2758) | .250 (6.35) | .78 | 185 (250) | 4.64 (117.86) | 3.38 (85.73) | 0.72 (18.29) | 1.19 (30) | 1.50 (38) |
| 43CKO16 | F1000C43 | 43,000 (2965) | .438 (11.13) | 4.3 | 530 (720) | 6.54 (166.11) | 5.63 (143.00) | 0.72 (18.29) | 1.38 (35) | 1.88† (48) |

Ball Check Valves

| | | | | | | | | | | |
|----------|----------|---------------|--------------|-----|-----------|---------------|---------------|--------------|-----------|------------|
| CB4401 | F250C | 60,000 (4140) | .094 (2.39) | .15 | 110 (150) | 3.38 (85.85) | 2.50 (63.50) | 0.50 (12.70) | 0.63 (16) | 1.18 (30) |
| CB6601 | F375C | 60,000 (4140) | .125 (3.18) | .28 | 110 (150) | 3.75 (95.25) | 2.62 (66.55) | 0.53 (13.46) | 0.75 (19) | 1.18 (30) |
| CB9901 | F562C | 60,000 (4140) | .187 (4.75) | .63 | 160 (220) | 4.62 (117.35) | 3.38 (85.85) | 0.81 (20.57) | 1.12 (28) | 1.50 (38) |
| 40CB9901 | F562C40 | 40,000 (2558) | .250 (6.35) | .78 | 185 (250) | 4.64 (117.86) | 3.38 (85.85) | 0.72 (18.29) | 1.19 (30) | 1.50 (38) |
| 43CB16 | F1000C43 | 43,000 (2965) | .438 (11.13) | 4.3 | 530 (720) | 6.54 (166.11) | 5.63 (143.00) | 0.72 (18.29) | 1.38 (35) | 1.88† (48) |

Ball Type Excess Flow Valves (Surge Check)

| | | | | | | | | | | |
|--------|-------|---------------|-------------|--|-----------|---------------|--------------|--------------|-----------|-----------|
| CK4402 | F250C | 60,000 (4140) | .094 (2.39) | | 110 (150) | 3.38 (85.85) | 2.50 (63.50) | 0.50 (12.70) | 0.63 (16) | 1.18 (30) |
| CK6602 | F375C | 60,000 (4140) | .125 (3.18) | | 110 (150) | 3.75 (95.25) | 2.62 (66.55) | 0.53 (13.46) | 0.75 (19) | 1.18 (30) |
| CK9902 | F562C | 60,000 (4140) | .187 (4.75) | | 160 (220) | 4.62 (117.35) | 3.38 (85.85) | 0.81 (20.57) | 1.12 (29) | 1.50 (38) |

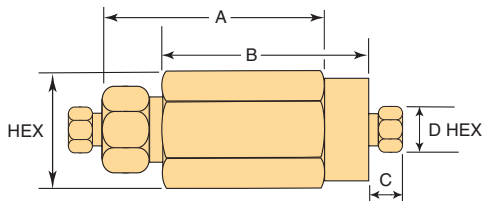

Note:


† Distance across flats

** Maximum pressure rating is based on the lowest rating of any component. Actual working pressure may be determined by tubing pressure rating, if lower. All dimensions for reference only and subject to change. For prompt service, Parker Autoclave stocks select products. Consult your local representative.


Check and Excess Flow Valve Dimensions

Line Filters

High Pressure - Pressures to 60,000 psi (4137 bar)

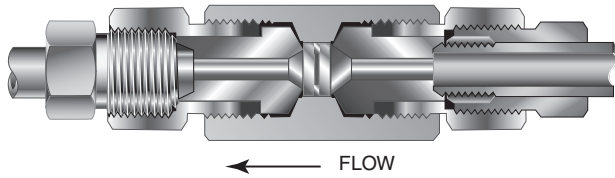

**CFL Series
Dual Disc Line Filters**

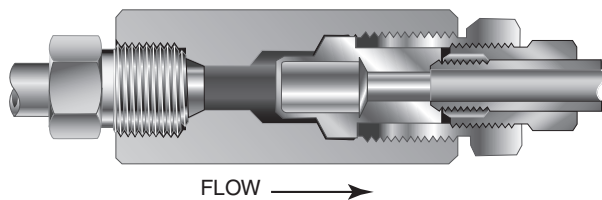

**CF Series
Cup Type Line Filters**

Dual-Disc Line Filters are utilized in numerous industrial, chemical processing, aerospace, nuclear and other applications. With the dual-disc design, large contaminant particles are trapped by the upstream filter element before they can reach and clog the smaller micron-size downstream element. Filter elements can be easily replaced.

Materials: Body, Cover, Gland Nut: CW 316 Stainless Steel.

Filter Element: 316L Stainless Steel, Sintered Disc Type. Downstream/upstream micron size 35/65 is standard. 5/10 or 10/35 also available when specified. Other element combinations available on special order.

High Flow Cup-Type Line Filters are recommended in high pressure systems requiring both high flow rates and maximum filter surface area. Widely used in the industrial and chemical processing fields, the cup design offers as much as six times the effective filter area as compared to disc-type units. In addition, the filter elements can be quickly and easily replaced.

Materials: Body, Cover, Gland Nut: CW 316 Stainless Steel.

Filter Element: 316L Stainless Steel, Sintered Cup Type. Standard elements available in choice of 5, 35 or 65 micron sizes. Note: Filter ratings are nominal.

Temperature Range: Both Models: Oxidizing Fluids: 750°F (400°C) maximum Non-Oxidizing Fluids: 900°F (480°C) -423°F (-252°C) minimum

Spare Parts: Filter Elements are only replaceable part with either filter type. See chart on page 14 for Filter Element part numbers.

NOTE 1: All filters furnished complete with connection components unless otherwise specified. All dimensions for reference only and subject to change. For optional materials, see Technical Section

NOTE 2: Parker Autoclave Engineers disc and cup type filters are designed to filter small amounts of process particles. It is recommended that all fluids are thoroughly cleaned prior to entering the higher pressure system.

NOTE 3: Special material filters may be supplied with four flats in place of standard hex.

NOTE 4: Pressure differential not to exceed 1,000 psi (69 bar) in a flowing condition. Filter Replacement is recommended.


NOTE 5: Larger micron size filter element is installed on the upstream (inlet) side.

Dual Disc Line Filters: High Pressure, 60,000 psi (4140 bar)


| Catalog Number | Orifice inches (mm) | Micron Size** | Replacement Filter P/N | Cover Gland Torque ft. lb (Nm) | Effective Filter Elements Area in ² (mm ²) | Dimensions - inches (mm) | | | | |
|----------------|---------------------|---------------|-------------------------------|--------------------------------|---|--------------------------|-----------------|-----------------|--------------|--------------|
| | | | | | | A | B | C | D Typical | Hex |
| CLF4400 | .094 (2.39) | 35/65 | 65um = P-0803 | 80 (110) | 0.07 (45.16) | 4.75 (20.66) | 3.00 (76.20) | 0.50 (12.70) | 0.63 (16) | 1.12 (28) |
| CLF4400-5/10 | | 5/10 | 35um = P-0804 | | | | | | | |
| CLF4400-10/35 | | 10/35 | 10um = P-1738 5um = P-1028 | | | | | | | |
| CLF6600 | .125 (3.18) | 35/65 | 65um = P-0803 | 120 (160) | 0.07 (45.16) | 5.12 (130.16) | 3.00 (76.20) | 0.53 (13.46) | 0.75 (19) | 1.12 (28) |
| CLF6600-5/10 | | 5/10 | 35um = P-0804 | | | | | | | |
| CLF6600-10/35 | | 10/35 | 10um = P-1738 5um = P-1028 | | | | | | | |
| CLF9900 | .187 (4.76) | 35/65 | 65um = P-0650 | 150 (200) | 0.15 (96.77) | 5.81 (147.67) | 3.38 (86.66) | 0.81 (20.68) | 1.12 (28) | 1.38 (35) |
| CLF9900-5/10 | | 5/10 | 35um = P-0805 | | | | | | | |
| CLF9900-10/35 | | 10/35 | 10um = P-1785 5um = P-1650 | | | | | | | |

Cup Type Line Filters: High Pressure, 60,000 psi (4140 bar)

| | | | | | | | | | | |
|--------|----------------|----|-----------|--------------|------------------|------------------|------------------|-----------------|--------------|--------------|
| CF4-5 | .094 (2.39) | 5 | 240A-2916 | 125 (170) | 1.29 (832.26) | 4.19 (106.42) | 3.38 (85.85) | 0.50 (12.70) | 0.63 (16) | 1.38 (35) |
| CF4-35 | | 35 | 241A-2916 | | | | | | | |
| CF4-65 | | 65 | 242A-2916 | | | | | | | |
| CF6-5 | .125 (3.18) | 5 | 240A-2916 | 125 (170) | 1.29 (832.26) | 4.62 (117.35) | 3.62 (91.94) | 0.53 (13.46) | 0.75 (19) | 1.38 (35) |
| CF6-35 | | 35 | 241A-2916 | | | | | | | |
| CF6-65 | | 65 | 242A-2916 | | | | | | | |
| CF9-5 | .187 (4.76) | 5 | 240A-2916 | 110 (150) | 1.29 (832.26) | 5.25 (133.35) | 4.06 (103.12) | 0.81 (20.58) | 1.12 (28) | 1.50 (38) |
| CF9-35 | | 35 | 241A-2916 | | | | | | | |
| CF9-65 | | 65 | 242A-2916 | | | | | | | |

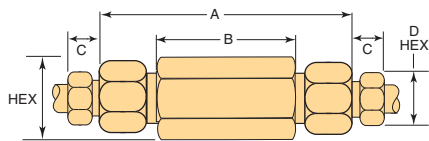

Dual Disc Line Filter Dimensions

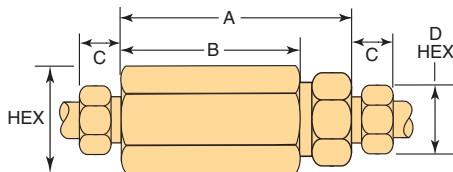

Cup Type Line Filter Dimensions

For optional materials, see Needle Valve Options section.


*Maximum pressure rating is based on the lowest rating of any component.

Actual working pressure may be determined by tubing pressure rating, if lower. All dimensions for reference only and subject to change.

For prompt service, Parker Autoclave Engineers stocks select products. Consult your local representative.

Anti-Vibration Collet Gland Assembly

Series KCGL High Pressure - Pressures to 60,000 psi (4140 bar)

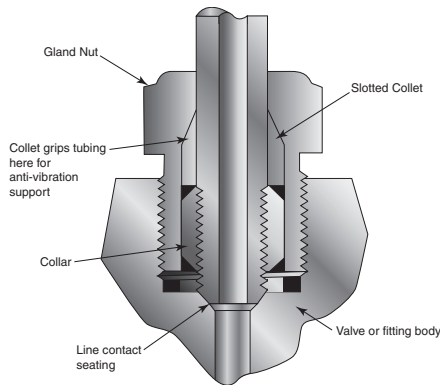

Series KCGL
60,000 psi (4137 bar)

Note:

- 1) To order valve and fitting components with anti-vibration assemblies add -K to catalog numbers.
- 2) Special material assemblies are normally supplied with four flats in place of standard hex.
- 3) See Tools and Installation Catalog for Installation Instructions including Torque Specifications.

Series KCGL (sizes to 9/16" [14.29 mm])

For extreme conditions of vibration and/or shock in tubing systems, such as locating valve or fitting on an unsupported line near a compressor, Parker Autoclave Engineers coned-and-threaded connections are offered with the Anti-Vibration Collet Gland Assemblies. Completely interchangeable with standard Parker Autoclave Engineers high pressure connections, the Collet Gland Assemblies provide equally effective pressure handling capability.

In standard connection systems, the bending stresses on the threaded area of the tubing imposed by excessive vibration or movement may cause premature fatigue failure of the tubing at the back of the thread. By moving the stress concentration back to the unthreaded part of the tubing and providing a wedge-type gripping action, the Parker Autoclave Engineers anti-vibration collet gland assembly strengthens the entire structure. With stress concentration reduced and overall stress level maintained well below the endurance limit of the material, the result is extended vibrational fatigue life.

A less complex and more economical design than other vibration-resistant connections, the Collet Gland Assembly utilizes the same coned-and-threaded features of Parker Autoclave Engineers high pressure connections. In Series KCGL the gland nut is recessed to accommodate a tapered, slotted collet that grips the tubing at a point behind the threaded area of the tubing. The design provides a slight difference in angles between the collet and the corresponding taper of the gland nut. As the nut is tightened, it acts to wedge the tapered end of the collet into a gripping engagement with the tubing and, at the same time, forces the collar and tubing assembly into line contact with the connection seat.

Anti-Vibration Collet Gland Assembly Details:

| Catalog Number | Part | Outside Diameter Tubing Size Inches (mm) | Dimensions: Inches (mm) | | |
|----------------|-------------------|--|-------------------------|-----------------|----------------|
| | | | A | B | Hex |
| KCGL40-316 | Complete Assembly | 1/4 (6.35) | 0.50 (12.70) | 0.81 (20.58) | 5/8 (16) |
| KCGL60-316 | Complete Assembly | 3/8 (9.53) | 0.62 (15.75) | 1.12 (28.45) | 13/16 (21) |
| KCGL90-316 | Complete Assembly | 9/16 (14.29) | 1.00 (25.40) | 1.50 (38.10) | 1-3/16 (30) |


Series KCGL
60,000 psi (4140 bar)

Standard Parker Autoclave Engineers collar not included in Antivibration Gland assembly (chart) if AV Gland ordered separately.

All dimensions for reference only and subject to change.
For prompt service, Parker Autoclave Engineers stocks select products. Consult your local representative.

Anti-Vibration Collet Gland Assembly

Series KCBGLX High Pressure - 1" Only to 43,000 psi (2965 bar)

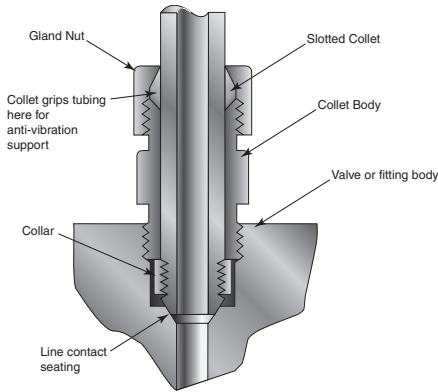

Series KCBGLX (1" only)
Pressures to 43,000 psi (2965 bar)

Series KCBGLX: 1" High Pressure [compatible with F1000C43 connection]

The 1" High Pressure Fittings and Valves utilize the 1" Medium Pressure Gland and Collar to secure the tubing into the connection. As such the Antivibration Gland assembly has a slightly different design from the typical "High Pressure" connection and has the collar in front of the gland nut.

Series KCBGLX extends the gland nut to provide room for the tapered, slotted collet and collet nut. The design provides a slight difference in angles between the collet and the corresponding taper of the gland nut. As the nut is tightened, it acts to wedge the tapered end of the collet into a gripping engagement with the tubing.

Material

316 SS with bonded dry film molybdenum disulfide to help prevent galling. Additional thread lubricant not needed.

Note:

- 1) To order valve and fitting components with anti-vibration assemblies add **-K** to catalog numbers.
- 2) Special material assemblies are normally supplied with four flats in place of standard hex.
- 3) See Tools and Installation Catalog for Installation Instructions including Torque Specifications.

1" Anti-Vibration Collet Gland Assembly Details:

| Catalog Number | Part | Outside Diameter Tubing Size Inches (mm) | Dimensions: Inches (mm) | | |
|---|-------------------|--|-------------------------|-----------------|----------------|
| | | | A | B | Hex |
| KCBGLX160-316MC | Complete Assembly | 1.0 (25.40) | 1.69 (25.40) | 2.38 (60.45) | 1-1/2" (38) |
| <p>All dimensions for reference only and subject to change. For prompt service, Parker Autoclave Engineers stocks select products. Consult your local representative.</p> | | | | | |

Series KCBGLX
Pressures to 43,000 psi (2965 bar)

Standard Parker Autoclave Engineers collar not included in complete assembly if ordered separately.

Always use back-up wrench on collet body when tightening collet gland nut to prevent over-torquing connection.

Parker's Motion & Control Technologies

At Parker, we're guided by a relentless drive to help our customers become more productive and achieve higher levels of profitability by engineering the best systems for their requirements. It means looking at customer applications from many angles to find new ways to create value. Whatever the motion and control technology need, Parker has the experience, breadth of product and global reach to consistently deliver. No company knows more about motion and control technology than Parker. For further information call 1-800-C-Parker.

| MARKET | KEY MARKETS | KEY PRODUCTS | | |
|---|--|---|--|---|
|  AEROSPACE | Aircraft Engines Commercial Commerical Transports Military Aircraft Regional Transports | Business and General Aviation Land-Based Weapons Systems Missiles and Launch Vehicles Unmanned Aerial Vehicles | Flight Control Systems & Components Fluid Conveyance Systems Fluid Metering Delivery & Atomization Devices Fuel Systems & Components | Hydraulic Systems & Components Inert Nitrogen Generating Systems Pneumatic Systems & Components Wheels & Brakes |
|  CLIMATE CONTROL | Agriculture Food, Beverage and Dairy Precision Cooling Transportation | Air Conditioning Life Sciences & Medical Processing | Co2 Controls Electronic Controllers Filter Driers Hand Shut-Off Valves Hose & Fittings | Pressure Regulating Valves Refrigerant Distributors Safety Relief Valves Solenoid Valves Thermostatic Expansion Valves |
|  ELECTRO-MECHANICAL | Aerospace Life Science & Medical Packaging Machinery Plastics Machinery & Converting Semiconductor & Electronics Factory Automation | Machine Tools Paper Machinery Primary Metals Textile Wire & Cable | AC/DC Drives & Systems Electric Actuators, Gantry Robots & Slides Electrohydrostatic Actuation Systems Electromechanical Actuation Systems Human Machine Interface | Linear Motors Stepper Motors, Servo Motors Drives & Controls Structural Extrusions |
|  FILTRATION | Food & Beverage Life Sciences Mobile Equipment Power Generation Transportation | Industrial Machinery Marine Oil & Gas Process | Analytical Gas Generators Compressed Air & Gas Filters Condition Monitoring Engine Air, Fuel & Oil Filtration & Systems | Hydraulic, Lubrication & Coolant Filters Process, Chemical, Water Microfiltration Filters Nitrogen, Hydrogen & Zero Air Generators |
|  FLUID and GAS HANDLING | Aerospace Agriculture Bulk Chemical Handling Construction Machinery Food & Beverage Fuel & Gas Delivery | Industrial Machinery Mobile Oil & Gas Transportation Welding | Brass Fittings & Valves Diagnostic Equipment Fluid Conveyance Systems Industrial Hose | PTFE & PFA Hose, Tubing & Plastic Fittings Rubber & Thermoplastic Hose & Couplings Tube Fittings & Adapters Quick Disconnects |
|  HYDRAULICS | Aerospace Aerial lift Agriculture Construction Machinery Forestry | Industrial Machinery Mining Oil & Gas Power Generation & Energy Truck Hydraulics | Diagnostic Equipment Hydraulic Cylinders & Accumulators Hydraulic Motors & Pumps Hydraulic Systems Hydraulic Valves & Controls | Power Take-Offs Rubber & Thermoplastic Hose & Couplings Tube Fittings & Adapters Quick Disconnects |
|  PNEUMATICS | Aerospace Conveyor & Material Handling Factory Automation Life Science & Medical | Machine Tools Packaging Machinery Transportation & Automotive | Air Preparation Brass Fittings & Valves Manifolds Pneumatic Accessories Pneumatic Actuators & Grippers Pneumatic Valves & Controls | Quick Disconnects Rotary Actuators Rubber & Thermoplastic Hose & Couplings Structural Extrusions Thermoplastic Tubing & Fittings Vacuum Generators, Cups & Sensors |
|  PROCESS CONTROL | Chemical & Refining Food, Beverage & Dairy Medical & Dental | Microelectronics Oil & Gas Power Generation | Analytical Sample Conditioning Products & Systems Fluoropolymer Chemical Delivery Fittings, Valves & Pumps High Purity Gas Delivery Fittings, & Valves & Regulators | Instrumentation Fittings, Valves Regulators Medium Pressure Fittings & Valves Process Control Manifolds |
|  SEALING and SHIELDING | Aerospace Chemical Processing Consumer Energy, Oil & Gas Fluid Power General Industrial | Information Technology Life Sciences Military Semiconductor Transportation | Dynamic Seals Elastomeric O-Rings Emi Shielding Extruded & Precision-Cut, Fabricated Elastomeric Seals | Homogeneous & Inserted Elastomeric Shapes High Temperature Metal Seals Metal & Plastic Retained Composite Seals Thermal Management |

Parker Worldwide

North America

USA – Corporate, Cleveland, OH
Tel: +1 256 896 3000

USA – IPD, Huntsville, AL
Tel: +1 256 881 2040
ipdcct@parker.com

USA – IPD, (Autoclave), Erie, PA
Tel: +1 814 860 5700
ipdaect@parker.com

CA – Canada, Grimsby, Ontario
Tel: +1 905-945-2274
ipd_canada@parker.com

South America

AR – Argentina, Buenos Aires
Tel: +54 3327 44 4129
falecom@parker.com

BR – Brazil, Diadema, SP
Tel: +55 11 4360 6700
falecom@parker.com

CL – Chile, Santiago
Tel: +56 (0) 2 2303 9640
falecom@parker.com

MX – Mexico, Toluca
Tel: +52 722 275 4200
contacto@parker.com

Asia Pacific

AU – Australia, Dandenong
Tel: +61 (0)2 9842 5150
customer.service.au@parker.com

CN – China, Shanghai
Tel: +86 21 2899 5000
INGtechnical.china@parker.com

HK – Hong Kong
Tel: +852 2428 8008

IN – India, Mumbai
Tel: +91 22 6513 7081-85

ID – Indonesia, Tangerang
Tel: +62 2977 7900
parker.id@parker.com

JP – Japan, Tokyo
Tel: +(81) 3 6365 4020
infophj@parker.com

KR – South Korea, Seoul
Tel: +82 2 559 0400
parkerkr@parker.com

MY – Malaysia, Selangor
Tel: +603 784 90 800
parkermy@parker.com

SG – Singapore,
Tel: +65 6887 6300
parkerkg@parker.com

TH – Thailand, Bangkok
Tel: +66 2 186 7000
phthailand@parker.com

TW – Taiwan, Taipei
Tel: +886 2 2298 8987
enquiry.taiwan@parker.com

VN – Vietnam, Hochi Minh City
Tel: +848 382 508 56
parker_viet@parker.com

Europe, Middle East, Africa

AE – UAE, Dubai
Tel: +971 4 812 7100
parker.me@parker.com

AT – Austria, Wiener Neustadt
Tel: +43 (0)2622 23501-0
parker.austria@parker.com

AT – Eastern Europe, Wiener Neustadt
Tel: +43 (0)2622 23501 900
parker.easteurope@parker.com

AZ – Azerbaijan, Baku
Tel: +994 50 2233 458
parker.azerbaijan@parker.com

BE/LU – Belgium, Nivelles
Tel: +32 (0)67 280 900
parker.belgium@parker.com

BG – Bulgaria, Sofia
Tel: +359 2 980 1344
parker.bulgaria@parker.com

BY – Belarus, Minsk
Tel: +48 (0)22 573 24 00
parker.belarus@parker.com

CH – Switzerland, Etoy
Tel: +41 (0) 21 821 87 00
parker.switzerland@parker.com

CZ – Czech Republic, Klecany
Tel: +420 284 083 111
parker.czechrepublic@parker.com

DE – Germany, Kaarst
Tel: +49 (0)2131 4016 0
parker.germany@parker.com

DK – Denmark, Ballerup
Tel: +45 43 56 04 00
parker.denmark@parker.com

ES – Spain, Madrid
Tel: +34 902 33 00 01
parker.spain@parker.com

FI – Finland, Vantaa
Tel: +358 (0)20 753 2500
parker.finland@parker.com

FR – France, Contamine s/Arve
Tel: +33 (0)4 50 25 80 25
parker.france@parker.com

GR – Greece, Athens
Tel: +30 210 933 6450
parker.greece@parker.com

HU – Hungary, Budapest
Tel: +36 223 885 470
parker.hungary@parker.com

IE – Ireland, Dublin
Tel: +353 (0)1 466 6370
parker.ireland@parker.com

IT – Italy, Corsico (MI)
Tel: +39 02 45 19 21
parker.italy@parker.com

KZ – Kazakhstan, Almaty
Tel: +7 7273 561 000
parker.easteurope@parker.com

NL – The Netherlands, Oldenzaal
Tel: +31 (0)541 585 000
parker.nl@parker.com

NO – Norway, Stavanger
Tel: +47 66 75 34 00
parker.norway@parker.com

PL – Poland, Warsaw
Tel: +48 (0)22 573 24 00
parker.poland@parker.com

PT – Portugal, Leca da Palmeira
Tel: +351 22 999 7360
parker.portugal@parker.com

RO – Romania, Bucharest
Tel: +40 21 252 1382
parker.romania@parker.com

RU – Russia, Moscow
Tel: +7 495 645-2156
parker.russia@parker.com

SE – Sweden, Spånga
Tel: +46 (0)8 59 79 50 00
parker.sweden@parker.com

SK – Slovakia, Banská Bystrica
Tel: +421 484 162 252
parker.slovakia@parker.com

SL – Slovenia, Novo Mesto
Tel: +386 7 337 6650
parker.slovenia@parker.com

TR – Turkey, Istanbul
Tel: +90 216 4997081
parker.turkey@parker.com

UA – Ukraine, Kiev
Tel: +48 (0)22 573 24 00
parker.ukraine@parker.com

UK – United Kingdom, Warwick
Tel: +44 (0)1926 317 878
parker.uk@parker.com

ZA – South Africa, Kempton Park
Tel: +27 (0)11 961 0700
parker.southafrica@parker.com

! CAUTION !

Do not mix or interchange component parts or tubing with those of other manufacturers. Doing so is unsafe and will void warranty.

Parker Autoclave Engineers Valves, Fittings, and Tools are not designed to interface with common commercial instrument tubing and are designed to only connect with tubing manufactured to Parker Autoclave Engineers AES specifications. Failure to do so is unsafe and will void warranty.

WARNING

FAILURE, IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

This document and other information from Parker Hannifin Corporation, its subsidiaries and authorized distributors provide product and/or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application and review the information concerning the product or system in the current product catalog. Due to the variety of operating conditions and applications for these products or systems, the user, through its own analysis and testing, is solely responsible for making the final selection of the products and systems and assuring that all performance, safety and warning requirements of the application are met. The products described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Parker Hannifin Corporation and its subsidiaries at any time without notice.

Offer of Sale

The items described in this document are available for sale by Parker Hannifin Corporation, its subsidiaries or its authorized distributors. Any sale contract entered by Parker will be governed by the provisions stated in Parker's standard terms and conditions of sale (copy available upon request).



Instrumentation Products Division
Autoclave Engineers Operation
8325 Hessinger Drive
Erie, PA 16509-4679
Tel: 814 860 5700
Fax: 814 860 5811
www.autoclave.com
www.parker.com/ipd

Instrumentation Products Division
Division Headquarters
1005 A Cleaner Way
Huntsville, AL 35805 USA
Tel: 256 881 2040
Fax: 256 881 5072

Parker Hannifin Manufacturing Ltd.
Instrumentation Products Division,
Europe
Riverside Road
Pottington Business Park
Barnstaple, UK, EX31 1NP, UK
Tel: 44 1271 313131
Fax: 44 1271 373636