

Parker Clean Seal

Secure sealing system for hose fittings



Clean Seal protection for your hose assembly needs.

Parker's Clean Seal capsule is a simple, easy and clean alternative to cap your hose and fitting assemblies. The Clean Seal cap enables a secure fit due to an easy to use heat shrink system. Reduce your cap complexity as one Clean Seal cap will seal multiple end configurations and sizes, eliminating many unique traditional caps.

The Clean Seal process utilizes heat shrink technology to cover the end of a hose assembly. The heat shrink technology eliminates problems due to re-contamination issues. When traditional caps and plugs are forced onto assemblies, plastic debris and particles shred off into your hose, ultimately causing re-contamination.



Contact Information:

Parker Hannifin Corporation
Hose Products Division
30240 Lakeland Blvd.
Wickliffe, OH 44092

phone 440 943 5700
fax 440 943 3129
HPDOrders@parker.com

www.parker.com

Product Features:

- For use on fittings up to -24 (1-1/2")
- Fits straight and elbow fittings
- Easy pull tab removal
- Reduced environmental impact compared to traditional caps
 - Less plastic used
 - More crushable
- Multiple hoses can be capped at one time




ENGINEERING YOUR SUCCESS.

Parker Clean Seal

Capsule Part Numbers

| Packaged | | Bulk | | Sizing | |
|----------------------|------------------|-------------------|---------------|---------------------------|-------------------------------|
| Parker P/N (Package) | Package Quantity | Parker P/N (Bulk) | Bulk Quantity | Hex Sizes Covered (in mm) | Hex Sizes Covered (in inches) |
| PCS-2023P | 810 | PCS-2023B | 23,400 | 12mm to 18mm | .47" to .71" |
| PCS-2030P | 810 | PCS-2030B | 23,400 | 12mm to 18mm | .47" to .71" |
| PCS-2224P | 810 | PCS-2224B | 23,500 | 16mm to 21mm | .63" to .83" |
| PCS-2527P | 800 | PCS-2527B | 17,600 | 18mm to 23mm | .71" to .91" |
| PCS-2540P | 800 | PCS-2540B | 17,600 | 18mm to 23mm | .71" to .91" |
| PCS-2840P | 720 | PCS-2840B | 15,200 | 22mm to 26mm | .87" to 1.02" |
| PCS-3133P | 640 | PCS-3133B | 12,240 | 24mm to 29mm | .94" to 1.14" |
| PCS-3140P | 640 | PCS-3140B | 12,240 | 24mm to 29mm | .94" to 1.14" |
| PCS-3440P | 640 | PCS-3440B | 10,240 | 27mm to 32mm | 1.07" to 1.26" |
| PCS-3840P | 560 | PCS-3840B | 7,800 | 30mm to 36mm | 1.09" to 1.42" |
| PCS-4345P | 480 | PCS-4345B | 6,240 | 32mm to 41mm | 1.26" to 1.61" |
| PCS-4650P | 480 | PCS-4650B | 5,760 | 34mm to 44mm | 1.34" to 1.73" |
| PCS-5260P | 400 | PCS-5260B | 4,400 | 41mm to 50mm | 1.62" to 1.97" |
| PCS-5860P | 400 | PCS-5860B | 3,600 | 49mm to 56mm | 1.93" to 2.20" |
| PCS-6760P | 320 | PCS-6760B | 2,560 | 55mm to 65mm | 2.16" to 2.56" |

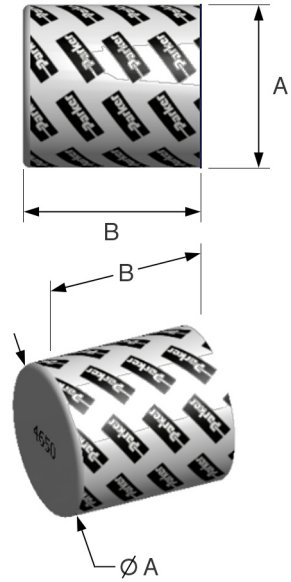

PCS-4650B
 "A" "B" B=Bulk
 P=Package

"A" and "B" dimensions in mm. Shorter length capsules recommended for elbow/bent fittings.

Equipment Part Numbers

| UC-CSS-230V | UC-HL1910E | UC-HG-STAND | UC-1.5HD |
|---|---|--|--|
| Production Heat Shrink machine with timer  | Electric heat gun with case  | Flex vacuum pumpstand for heat gun  | 95mm diffuser for 1-1/2" heat gun connection  |

Removal is an easy 3-step process.

