



Parker Lubrication Hoses

Parflex Hose and Fittings For Remote
Grease Lines



ENGINEERING YOUR SUCCESS.

Parker Lubrication Products

The Importance of Lubrication

Lubrication is more than simply an additive to a machine; it is an **integral component** of that machine and therefore should be closely monitored to ensure it maintains its quality.


Bearing problems caused by inadequate lubrication have many forms, including roller end scoring from metal-to-metal contact and excessive wear on rollers and raceways. Excessive heat can cause rib face scoring or "welding" damage, and/or deformation. In extreme cases, inadequate lubrication causes rollers to skew or slide sideways, leading to bearing lockup.

There are signs that indicate when bearing lubrication is inadequate or in excess. If these signs are detected soon enough, conditions can be corrected before catastrophic damage occurs.

With inadequate lubrication, gauges and operating temperatures will show the bearing is running hot, and it will become noisy from metal-to-metal contact. With excess lubrication, the lubricant can break down due to increased operating temperatures, as indicated by a dark brownish-black color.

With proper lubricant application and a regular maintenance schedule, bearing damage from lubrication problems can be avoided.

Here are some tips to ensure proper bearing lubrication:


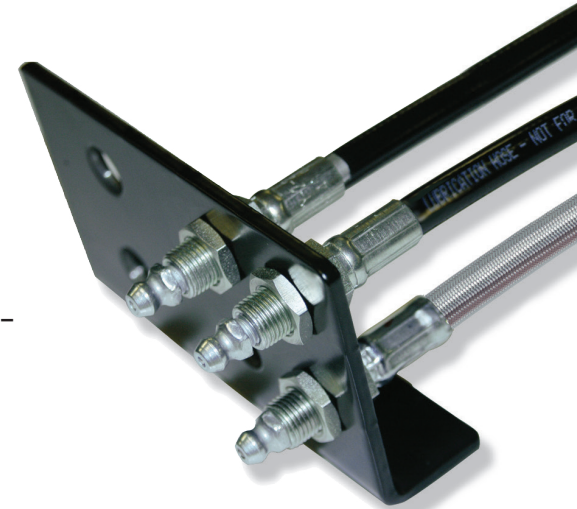


- **Follow lubrication guidelines established by the equipment builder.**
- **When grease packing a bearing, force the grease between the rollers and cage to ensure the bearing is packed completely full.**
- **Watch equipment gauges for early indications of a problem, such as unusually high temperatures.**
- **Listen for noise or unusual vibration.**
- **Watch for lubricant leaks.**

Lubrication is **essential** to all the moving parts, especially bearings, and it also serves to carry away heat and **protect bearing** surfaces from corrosion and wear.



The products in this brochure are designed to handle the harsh environment associated with lubrication. Parker engineers have designed these hoses, fittings and accessories based on safety and ease of use.

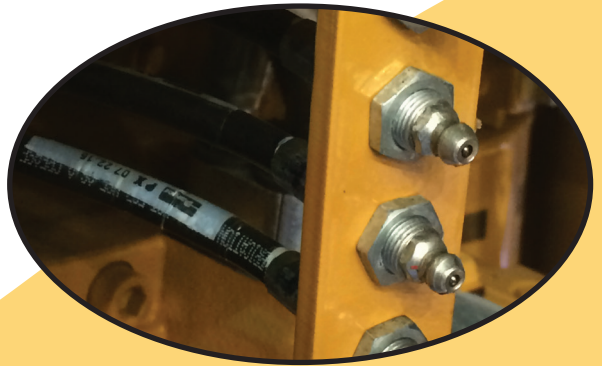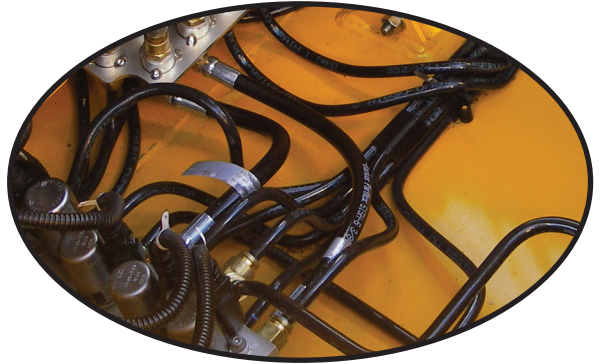

HLB/HLBD Remote Grease & Lubrication Hose

Don't let 5¢ of grease shut down a \$75,000 piece of equipment.

Plant Services magazine estimates that 90% of all bearings are lubricated with grease, and 80% of bearing failures are lubrication related. Proper lubrication is essential to extending the life of a bearing. Grease serves three main purposes: providing lubrication, preventing wear (or damage) from contaminants and inhibiting corrosion.



Compact 1/8" hoses save hundreds of dollars in operation waste by eliminating gallons of unnecessary 'in-line' grease versus larger bore rubber hose.

👍 Rule of thumb:
If a grease fitting is not visible, it is likely not being properly lubricated!

Excessive Downtime

Grease zerk nipples are often inaccessible on today's crowded equipment. As a result, preventive maintenance takes too long to complete or is not completed at all. A maintenance person can easily spend 5 to 7 minutes reaching an inaccessible grease zerk and still not inject enough grease into the bearing. Poor lubrication and bearing selection account for approximately 34% of premature bearing failures and contamination accounts for another 16% of premature bearing failures. This results in excessive downtime, costly replacement of damaged components and lost productivity. Awkward positioning of grease fittings also creates the dynamics to induce a high-pressure grease injection injury.

Parker's Solution


Parker's HLB remote grease hose makes it easy to properly perform quick and effective preventive maintenance on all types of industrial, mobile, and transportation equipment. These lines connect grease port locations to a convenient service access panel where grease can be manually distributed throughout the machine. HLB hose utilizes a panel mounted hose fitting with integral zerk fitting port. Locknuts, zerk nipples, and caps can also be sub-assembled.

HLB Lubrication System vs. 1/4" Rubber Hose

Reduced component / labor costs	save \$10 to \$20 per line
Unnecessary adapter costs	save \$5 to \$10 per zerk connection
Light weight reduces freight cost.	up to 60% lighter
General lubrication issues.	50% - 80% potential reduction
Properly lubricate multiple points in less time	up to 80% time reduction

HLB/HLBD – Remote Lubrication Hose

Copolyester Core Tube/Nylon Core Tube



Features

- Compact 1/8" I.D. hoses save hundreds of dollars of waste in your operation by eliminating gallons of unnecessary "in-line" grease versus larger bore rubber hoses
- HLB/HLBD remote lubrication system versus 1/4" rubber hoses can save money per line in reduced component and installation labor costs
- Unique GK bulkhead hose fittings with integrated nipple can save money per zerk connection in unnecessary adapter costs

Compliance

- Meets/Exceeds SAE J517 100R7 - HLBD02
- MSHA compliant cover

Series HLB/HLBD

[Visit the webpage](#)

Part Number	Nominal I.D.		Maximum O.D.		Max. Working Pressure 73°F/ 23°C		Minimum Bend Radius		Weight		Permanent Series	Field Attachable Series
	inch	mm	inch	mm	psi	MPa	inch	mm	lbs/ft	kg/mtr		
HLBD02	1/8	3.2	0.32	8.1	3,000	20.7	1/2	13	0.03	0.04	CY	BU
HLB03	3/16	5	0.41	10.4	3,000	20.7	3/4	19	0.06	0.08	CY	-

Construction

- Tube: HLBD02 - Nylon
HLB03 - Copolyester
- Reinforcement: Fiber
- Cover: Polyurethane

Fittings

- CY Series BU Series
- For most Parker products, Crimp Die Selection charts are found online at www.parker.com/crimpsource

Operating Parameters

- Temperature Range:
 - Petroleum base hydraulic fluids and lubricating oils within temperature range -40°F (-40°C) to 212°F (100°C)
 - Synthetic, synthetic blend, water, and water/oil emulsion hydraulic fluids limited to 135°F (57°C) (HLB03 only)
 - BU Series Field Attachable Fitting limited to 120°F (48°C)
- Vacuum Rating: 28 inch Hg
- Change in length at Max. Working Pressure: +/-3%
- Min. Burst Pressure is 4x Max. Working Pressure at 73°F (23°C)

Notes


- Perforated cover - HLBD02
- Non-perforated cover - HLB03
- Field attachable fittings are not intended for use on hose that has been previously in service

Color

- ● Black


Accessories	
Part Number	Description
NA-6520	Grease Zerk
2GK-Nut	Bulkhead Nut
CY02-652317	HLB02 Spring Guard
3PSG-4	HLB03 Spring Guard

See these parts on page 9.



BU Series Fittings - Field Attachable


201BU Male Taper Pipe Rigid



Construction: Steel.

Part Number	Thread Size	Hose I.D.		A		Cutoff Allow. B		H Hex	W Hex
		inch	mm	inch	mm	inch	mm	inch	inch
201BU-2-2	1/8-27	1/8	3	1.50	38	1	25	7/16	7/16

206BU Female SAE (JIC) 37° Swivel




Construction: Steel.

Part Number	Thread Size	Hose I.D.		A		Cutoff Allow. B		H Hex	J Hex	W Hex
		inch	mm	inch	mm	inch	mm	inch	inch	inch
206BU-3-2	3/8-24	1/8	3	1.72	44	1-3/16	30	1/2	9/16	7/16
206BU-4-2	7/16-20	1/8	3	1.77	45	1-3/16	30	9/16	9/16	7/16

NOTE: Size -4 incorporates a dual seat.

213BU Male Taper Pipe Swivel




Construction: Steel.

Part Number	Thread Size	Hose I.D.		A		Cutoff Allow. B		H Hex	J Hex	W Hex
		inch	mm	inch	mm	inch	mm	inch	inch	inch
213BU-2-2	1/8-27	1/8	3	2.07	53	1-1/2	38	1/2	1/2	7/16

CY Series Fittings - Permanent


101CY Male Taper Pipe Rigid



Construction: Steel. Add "C" for Stainless Steel.

Part Number	Thread Size	Hose I.D.		A		Cutoff Allow. B		H Hex
		inch	mm	inch	mm	inch	mm	inch
101CY-2-2	1/8-27	1/8	3	1.31	33	13/16	21	7/16
101CY-2-3	1/8-27	3/16	5	1.74	44	7/8	22	1/2
101CY-4-2	1/4-18	1/8	3	1.51	38	1	25	9/16
101CY-4-3	1/4-18	3/16	5	1.97	50	1-1/8	28	9/16


102CY Female Pipe Thread



Construction: Steel. Add "C" for Stainless Steel.

Part Number	Thread Size	Hose I.D.		A		Cutoff Allow. B		H Hex
		inch	mm	inch	mm	inch	mm	inch
102CY-2-3	1/8-27	3/16	5	1.97	50	1-1/16	27	1/2

106CY Female SAE (JIC) 37° Swivel




Construction: Steel. Add "C" for Stainless Steel.

Part Number	Thread Size	Hose I.D.		A		Cutoff Allow. B		H Hex	J Hex
		inch	mm	inch	mm	inch	mm	inch	inch
106CY-2-2	5/16-24	1/8	3	1.52	39	15/16	24	7/16	7/16
106CY-3-2	3/8-24	1/8	3	1.53	39	1	25	1/2	1/2
106CY-4-2	7/16-20	1/8	3	1.59	40	1	25	9/16	9/16
106CY-4-3	7/16-20	3/16	5	1.99	50	1-1/8	29	9/16	9/16

NOTE: Size -4 incorporates a dual seat.

113CY Male Pipe Swivel*



Construction: Steel. Add "C" for Stainless Steel.

Part Number	Thread Size	Hose I.D.		A		Cutoff Allow. B		H Hex	J Hex
		inch	mm	inch	mm	inch	mm	inch	inch
113CY-2-2	1/8-27	1/8	3	1.89	48	1-5/16	33	1/2	1/2
113CY-2-3	1/8-27	3/16	3	2.29	58	1-7/16	36	1/2	1/2


NOTE: *Nitrile O-ring. See O-ring Material Selection section, Catalog 4660.

WARNING: Fittings allow minor movement to relieve stress on hose but are not recommended for continued or extensive swiveling.

CY Series Fittings - Permanent

HLB D - HLB LUBRICATION FITTINGS


139CY Female JIC 37° Swivel 90° Elbow



Part Number	Thread Size	Hose I.D.		A		Cutoff Allow. B		E		J Hex
		inch	mm	inch	mm	inch	mm	inch	mm	inch
139CY-4-2	7/16-20	1/8	3	1.61	41	1-1/8	29	0.83	21	9/16
139CY-4-3	7/16-20	3/16	5	1.90	48	1	25	0.83	21	9/16

Construction: Steel. Add "C" for Stainless Steel.

1JCCY Female Seal-Lok™ Swivel Straight Short




Part Number	Thread Size	Hose I.D.		A		Cutoff Allow. B		C		H Hex	J Hex
		inch	mm	inch	mm	inch	mm	inch	mm	inch	inch
1JCCY-4-2	9/16-18	1/8	3	1.29	33	3/4	19	0.32	8	9/16	11/16

Construction: Steel. Add "C" for Stainless Steel.

NOTE: When measuring overall length to the end of the nut, B+C dimensions must be used to calculate cut-off allowance.

1GKCY Bulkhead with Integrated Zerk Port Bulkhead Nut and Grease Zerk




Part Number	Thread Size	Hose I.D.		A		Cutoff Allow. B		H Hex
		inch	mm	inch	mm	inch	mm	inch
1GKCY-2-2*	1/8-27 NPSM Male with 1/4-28 UNF Female	1/8	3	1.45	37	7/8	22	1/2
1GKCY-2-3*	1/8-27 NPSM Male with 1/4-28 UNF Female	3/16	5	1.86	47	1	25	1/2
1GKCY-2-L77**	1/8-27 NPSM Male with 1/4-28 UNF Female	1/8	3	1.71	43	1-1/4	32	1/2

Construction: Steel. Add "C" for Stainless Steel.

NOTE: *Standard bulkhead for use with plates up to 1/4" thick. Uses 2GK-NUT, sold separately.

**Long bulkhead for use with plates under 3/4" thick. Uses 2GK-NUT, sold separately.




2GK-Nut

NA-6520

Part Number	Description	Thread Size	A		C		H Hex
			inch	mm	inch	mm	inch
2GK-Nut	Bulk-head Nut	1/8-27 NPSM	0.188	4.8	na	na	11/16
NA-6520	Grease Zerk	1/4-28 UNF	0.540	13.7	0.18	4.6	5/16
CY02-652317	HLB02 Spring Guard	-	-	-	-	-	-
3PSG-4	HLB03 Spring Guard	-	-	-	-	-	-

CY Series Fittings - Permanent


1J9CY Female Seal-Lok™ 90° Elbow Short Drop



Part Number	Thread Size	Hose I.D.		A		Cutoff Allow. B		E		H Hex	J Hex
		inch	mm	inch	mm	inch	mm	inch	mm	inch	inch
1J9CY-4-2	9/16-18	1/8	3	1.81	46	1-1/4	32	.83	21	11/16	9/16

Construction: Steel. Add "C" for Stainless Steel.


1LMCY Male Grease



Part Number	Thread Size	Hose I.D.		A		Cutoff Allow. B		H Hex
		inch	mm	inch	mm	inch	mm	inch
1LMCY-2-2	1/4-28	1/8	3	1.26	32	11/16	17	3/8

Construction: Steel. Add "C" for Stainless Steel.

1PDCY Integrated Bulkhead Diagnostic Nipple




Part Number	Thread Size	Hose I.D.		A		Cutoff Allow. B		H Hex
		inch	mm	inch	mm	inch	mm	inch
1PDCY-2-2	3/4"-16 UNF	1/8	3	2.40	61	1.875	48	1

Construction: Steel. Add "C" for Stainless Steel.

919/919B PTFE Hose

PTFE Core Tube

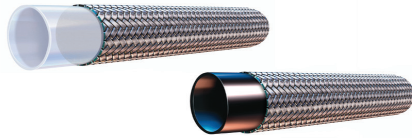

Features

- Excellent chemical compatibility
- Handles extreme temperatures to +450°F
- Environmentally safe
- Resists moisture
- Low friction minimizes pressure drops and deposits

Compliance

- Meets/Exceeds SAE J517 100R14A - 919
- Meets/Exceeds SAE J517 100R14B - 919B
- FDA CFR21 Part 177 compliant core - 919

Series 919/919B

[Visit the webpage](#)

Part Number		Nominal I.D.		Maximum O.D.		Maximum Working Pressure		Minimum Bend Radius		Vacuum Rating	Weight		Permanent Series	Field Attachable Series
Natural	Static Dissipative	inch	mm	inch	mm	psi	MPa	inch	mm		lbs/ft	kg/mtr		
919-4	919B-4	3/16	5	0.33	8.2	3,000	20.7	2	50	28	0.06	0.09	91N	90

Construction

- Tube: 919 - Natural FDA Compliant PTFE
919B - Black Static-Dissipative PTFE
- Reinforcement: 304 Stainless Steel Braid

Fittings

- 91/91N Series 90 Series
- For most Parker products, Crimp Die Selection charts are found online at www.parker.com/crimpsource

Operating Parameters


- Temperature Range:
-100°F (-73°C) to 450°F (232°C)
- Vacuum Rating: 28 inch Hg
- Change in length at Max. Working Pressure: +2% to -4%
- Min. Burst Pressure is 4x Max. Working Pressure at 73°F (23°C)

Notes

- Use hose type 919B with static-dissipative core tube when conveying non-conducting fluids such as oils, paints, fuels, steam, etc.
- Constructed with minimum .030" PTFE tube wall thickness
- Field attachable fittings are not intended for use on hose that has been previously in service

High Temperature Fittings - 91N Series


10191N Male Taper Pipe Rigid



Part Number	Thread Size	Hose Size	A		Cutoff Allow. B		H Hex
			inch	mm	inch	mm	inch
10191N-2-4	1/8-27	-4	1.27	32	3/4	19	7/16
10191N-4-4	1/4-18	-4	1.50	38	15/16	24	9/16

Construction: Brass nipple, steel shell.
Add "C" for Stainless Steel.

10691N Female SAE (JIC) 37° Swivel




Part Number	Thread Size	Hose Size	A		Cutoff Allow. B		H Hex	J Hex
			inch	mm	inch	mm	inch	inch
10691N-4-4	7/16-20	-4	1.47	37	7/8	22	3/8	9/16

NOTE: Incorporates a dual seat.

Construction: Brass nipple, steel nut and shell. Add "S" for Steel nipple, nut and shell. Add "C" for Stainless Steel.

Add "B" for Brass. Some sizes may not be available in every material. Contact Customer Service.


1GK91N Bulkhead with Integrated Zerk Port -Bulkhead Nut and Grease Zerk



Part Number	Thread Size	Hose Size	A		Cutoff Allow. B		H Hex
			inch	mm	inch	mm	inch
1GK91N-2-4*	1/8-27 NPSM Male with 1/4-28 UNF Female	-3	1.46	37	15/16	24	1/2

NOTE: *Long bulkhead for use with plates under 3/4" thick. Uses 2GK-NUT, sold separately.

Construction: Steel nipple, tube, nut and shell. Add "C" for Stainless Steel.




2GK-Nut

NA-6520

Part Number	Thread Size	Thread Size	A		C		H Hex
			inch	mm	inch	mm	inch
2GK-Nut	Bulkhead Nut	1/8-27 NPSM	0.125	4.8	na	na	9/16
NA-6520	Grease Zerk	1/4-28 UNF	0.540	13.7	0.18	4.6	5/16

1JC91N Female Seal-Lok™ Swivel Straight




Part Number	Thread Size	Hose Size	A		Cutoff Allow. B		E		H Hex	J Hex
			inch	mm	inch	mm	inch	mm	inch	inch
1JC91N-4-4	9/16-18	-4	1.16	30	5/8	16	0.31	8	9/16	7/16

Construction: Steel nipple, tube, nut and shell. Add "C" for Stainless Steel.

Multitube® Pre-Assembled Bundles

Tube Lines for Automatic Lubricators

Customers are looking for their equipment to be designed to provide a relatively simple and inexpensive method to automate the lubrication process. It is key to be able to reduce the installation time and material costs. Installing lubrication lines on a piece of equipment can be a time consuming and tedious task. The technician working on the installation will have various lubrication lines to route.

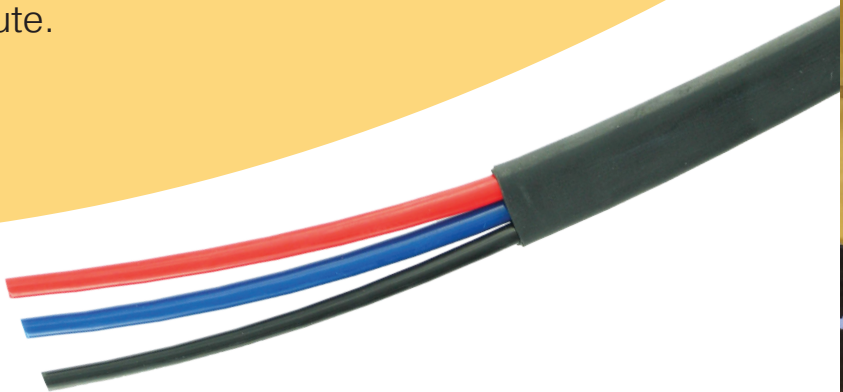

Parker's Solution

Tubing provides the ability to meter small amounts of grease on systems. By utilizing the jacketed tube design, end customers and users will be able to simplify routings and reduce start time. There are opportunities to lower the amount of scrap and order quantities, as well as the advantage of inventorying only one part number.

Bundled Tubing vs. Single Tubing

Installation simplicity	up to 33% quicker to install
Low profile bundled tubing	quicker routing
Jacketing tubing	additional abrasion protection
General lubrication issues	less grease is required for lube fill



**Let Parker help
you reduce costs
\$\$\$**

Employing **tube bundles** to meet specific application requirements **ensures consistency**, improves productivity, and time installation.



**More Savings
Bulkhead Zerk
Fitting**

Remote lubrication

Nylon Tubing

Series NR: Semi-Rigid High Strength



Features

- High tensile strength yielding excellent coupling retention.
- High grade nylon resins without plasticizers for higher pressure tubing applications
- High tensile strength and excellent coupling retention
- Produced from abrasion resistant, heat and light stabilized nylon resin
- Low moisture absorption
- Chemically resistant

Operating Parameters


- Suggested operating temperature range is -60°F (-51°C) to 200°F (93°C) - reference Pressure vs. Temperature charts as pressures are lower at elevated temperatures
- Working pressure and burst pressure are at 73°F (23°C)

Compliance

- UL-94 V0 compliant jacket material

Nylon Tubing (Series NR)

Maximum Working Pressure (psi)

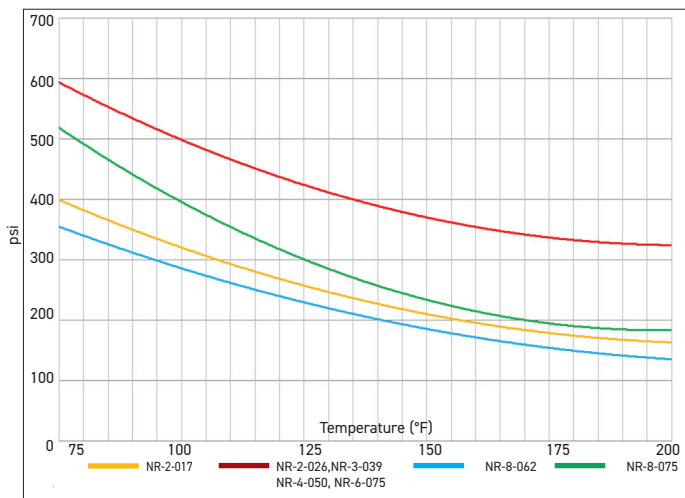

Color Code

○	NNR	Natural
●	NBR	Black

Notes

- Black (Series NBR) tubing suggested for use in sunlit areas and in proximity to high UV light sources
- If color not referenced, contact the division for availability.
- Standard pack part number has no length reference.
- Package quantity: -2 to -3 is 500'
-4 to -8 is 250'

Fittings

- Parker Fittings available from:
Fluid System Connectors Division
Otsego, MI parker.com/fsc
(269) 692-6555 (269) 692-6634 FAX
- For approved fittings and/or suggested use of tube supports, reference contact Parker Fluid Systems Connectors Division. 269 692-6555

Nylon Tubing

Series NR: Semi-Rigid High Strength

Series NR/NBR - Semi-Rigid High Strength Nylon Tubing - Natural and Black

[Visit the webpage](#)

Part Number	Nominal O.D.		Nominal I.D.		Average Wall Thickness		Working Pressure 73°F (23°C)		Minimum Burst Pressure		Minimum Bend Radius		Weight		Color
	inch	mm	inch	mm	inch	mm	psi	bar	psi	bar	mm	inch	lbs./ft.	kg/mtr	
NNR-2-017-0500 NBR-2-017-0500	1/8	3.2	.091	2.3	.017	0.4	425	29.3	1700	117.2	1/2	12	.003	.004	○ ●
NNR-2-026-0500 NBR-2-026-0500	1/8	3.2	.073	1.9	.026	0.7	625	43.1	2500	172.4	3/8	9	.004	.006	○ ●
NNR-3-024-0250 NBR-3-024-0250	3/16	4.8	.140	3.6	.024	0.6	425	29.3	1700	117.2	3/4	19	.006	.009	○ ●
NNR-3-039-0500 NBR-3-039-0500	3/16	4.8	.110	2.8	.039	1.0	625	43.1	2500	172.4	5/8	15	.008	.012	○ ●
NNR-4-035-0250 NBR-4-035-0250	1/4	6.4	.180	4.6	.035	0.9	425	29.3	1700	117.2	1	25	.011	.016	○ ●
NNR-4-050-0250 NBR-4-050-0250	1/4	6.4	.150	3.8	.050	1.3	625	43.1	2500	172.4	7/8	22	.014	.021	○ ●
NNR-5-040-0250 NBR-5-040-0250	3/8	7.9	.233	5.9	.040	1.0	425	29.3	1700	117.2	1-1/2	38	.015	.022	○ ●
NNR-6-048-0250 NBR-6-048-0250	3/8	9.5	.279	7.1	.048	1.2	425	29.3	1700	117.2	1-3/4	44	.022	.033	○ ●
NNR-6-075-0250 NBR-6-075-0250	3/8	9.5	.225	5.7	.075	1.9	625	43.1	2500	172.4	1-1/2	38	.032	.048	○ ●
NNR-8-062-0250 NBR-8-062-0250	1/2	12.7	.375	9.5	.062	1.6	375	25.9	1500	103.4	2-3/8	60	.038	.057	○ ●
NNR-8-075-0250 NBR-8-075-0250	1/2	12.7	.350	8.9	.075	1.9	625	43.1	2500	172.4	2-1/2	63	.045	.067	○ ●



Parker Hannifin Corporation

Parflex

Parflex Division

1300 North Freedom St.

Ravenna, OH 44266

phone (330) 296 2871

fax (330) 296 8433

www.parker.com/parflex

ENGINEERING YOUR SUCCESS.