


Interchange Element Data Sheet

Data sheet created using the Parker Par Fit Toolkit software.

Creation Date:	03/08/2018
Datasheet No:	DS1756W
Parker Part No:	925602Q
OEM:	Pall
OEM Part No:	HC9020FKP8H&Z

Product Dimensions

A (mm)	45.5	(inch)	1.79
B (mm)	25.8	(inch)	1.02
D (mm)	45.5	(inch)	1.79
E (mm)	208.0	(inch)	8.19

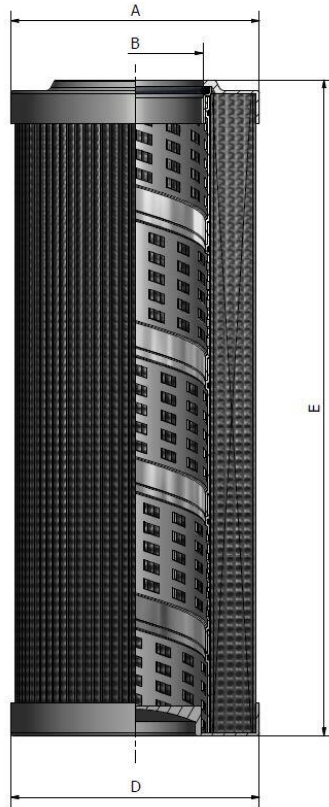

Construction Materials

Seal(s):	FPM: Fluoroelastomer
Top Endcap:	Glass reinforced nylon
Bottom Endcap:	Glass reinforced nylon
Inner Support Cylinder:	Mild steel tin plated
Filter Media:	Multilayer fibreglass with coated mesh on both sides

Calculated Performance Criteria

Differential Pressure (Δp):	0.56 bar @ 35 l/min
Tested to ISO3968 @ 32 cSt	8.12 psi @ 7.70 gpm
Efficiency:	>Beta 200 @ N/A microns & greater >Beta 1000 @ 4.5 microns & greater
Minimum Collapse Pressure:	>20 bar
Tested to ISO2941	>290 psi
Dirt Holding Capacity acc. to ISO16889	9.2 gram @ 7 bar terminal pressure drop 9.2 gram @ 102 psi terminal pressure drop