

-Parker


Interchange Element Data Sheet

Data sheet created using the Parker Par Fit Toolkit software.

Creation Date:	03/08/2018
Datasheet No:	DS113W
Parker Part No:	927725Q
OEM:	Pall
OEM Part No:	HC9021FKP4H&Z

Product Dimensions

A (mm)	45.5	(inch)	1.79
B (mm)	25.8	(inch)	1.02
D (mm)	45.5	(inch)	1.79
E (mm)	112.5	(inch)	4.43

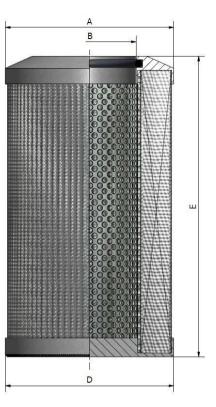



Construction Materials

Seal(s):	FPM: Fluoroelastomer
Top Endcap:	Steel tin plated
Bottom Endcap:	Steel tin plated
Inner Support Cylinder:	Mild steel tin plated
Filter Media:	Multilayer fibreglass with coated mesh on the inflow side and stainless steel mesh on the outlet side

Calculated Performance Criteria

Differential Pressure (∆p):	0.31 bar @ 10 l/min	
Tested to ISO3968 @ 32 cSt	4.50 psi @ 2.20 gpm	
Efficiency: >Beta 200 @ N/A microns & greater >Beta 1000 @ 4.5 microns & greater		
Minimum Collapse Pressure	:: >210 bar	
Tested to ISO2941	>3046 psi	
Dirt Holding Capacity acc. to ISO16889 >9.9 gram @ 7 bar terminal pressure drop		

>9.9 gram @ 102 psi terminal pressure drop



ENGINEERING YOUR SUCCESS.

www.parker.com/parfit