



# Interchange Element Data Sheet

Data sheet created using the Parker Par Fit Toolkit software.

<b>Creation Date:</b>	03/08/2018
<b>Datasheet No:</b>	DS067W
<b>Parker Part No:</b>	937125Q
<b>OEM:</b>	Pall
<b>OEM Part No:</b>	HC6300FKS26H&Z

**Product Dimensions**

<b>A (mm)</b>	78.0	<b>(inch)</b>	3.07
<b>B (mm)</b>	41.5	<b>(inch)</b>	1.63
<b>D (mm)</b>	78	<b>(inch)</b>	3.07
<b>E (mm)</b>	652.0	<b>(inch)</b>	25.67

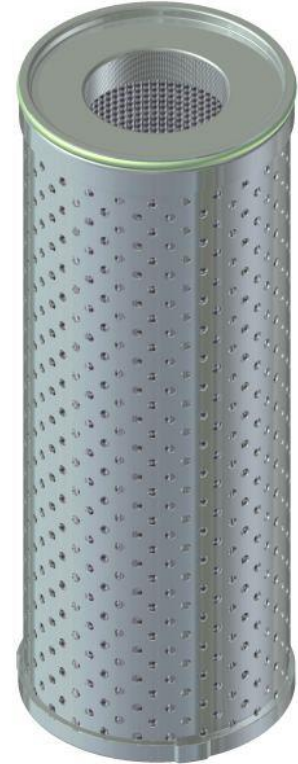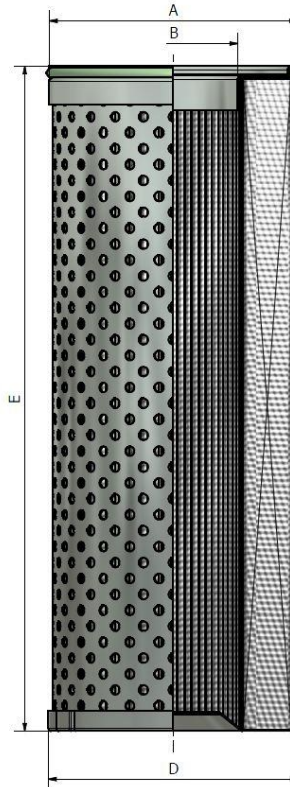

**Construction Materials**

<b>Seal(s):</b>	FPM: Fluoroelastomer
<b>Top Endcap:</b>	Mild steel zinc plated
<b>Bottom Endcap:</b>	Mild steel zinc plated
<b>Outer Support Cylinder:</b>	Mild steel tin plated
<b>Filter Media:</b>	Multilayer fibreglass with coated mesh on both sides

**Calculated Performance Criteria**

<b>Differential Pressure (<math>\Delta p</math>):</b>	0.29 bar @ 700 l/min
<b>Tested to ISO3968 @ 32 cSt</b>	4.21 psi @ 153.98 gp
<b>Efficiency:</b>	>Beta 200 @ 10 microns & greater >Beta 1000 @ 12 microns & greater
<b>Minimum Collapse Pressure:</b>	>10 bar
<b>Tested to ISO2941</b>	>145 psi
<b>Dirt Holding Capacity acc. to ISO16889</b>	80.3 gram @ 4 bar terminal pressure drop 80.3 gram @ 58 psi terminal pressure drop