



Interchange Element Data Sheet

Data sheet created using the Parker Par Fit Toolkit software.

 Creation Date:
 03/08/2018


 Datasheet No:
 DS237W

 Parker Part No:
 937169Q

 OEM:
 Pall

 OEM Part No:
 HC8314FKS16H&Z

| Product Dimensions | | | |
|--------------------|-------|--------|-------|
| A (mm) | 154.5 | (inch) | 6.08 |
| B (mm) | 95.0 | (inch) | 3.74 |
| C (mm) | 98.5 | (inch) | 3.88 |
| D (mm) | 154.5 | (inch) | 6.08 |
| E (mm) | 368.0 | (inch) | 14.49 |

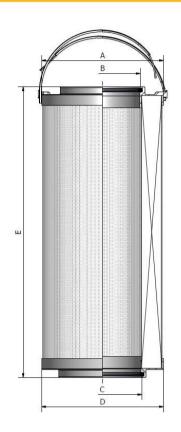



| Construction Materials | | | |
|------------------------|--|--|--|
| Seal(s): | FPM: Fluoroelastomer | | |
| Top Endcap: | Glass reinforced nylon | | |
| Bottom Endcap: | Glass reinforced nylon | | |
| Filter Media: | Multilayer fibreglass with coated mesh on both sides | | |

Calculated Performance Criteria

 Differential Pressure (Δp):
 0.14 bar @ 300 l/min

 Tested to ISO3968 @ 32 cSt
 2.03 psi @ 65.99 gpm

Efficiency: >Beta 200 @ 10 microns & greater

>Beta 1000 @ 12 microns & greater

Minimum Collapse Pressure: >10 bar
Tested to ISO2941 >145 psi

Dirt Holding Capacity acc. to ISO16889

207.8 gram @ 4 bar terminal pressure drop 207.8 gram @ 58 psi terminal pressure drop

