



Interchange Element Data Sheet

Data sheet created using the Parker Par Fit Toolkit software.

 Creation Date:
 03/08/2018


 Datasheet No:
 DS240W

 Parker Part No:
 937172Q

 OEM:
 Pall

 OEM Part No:
 HC8314FKT39H&Z

Product Dimensions			
A (mm)	154.5	(inch)	6.08
B (mm)	95.0	(inch)	3.74
C (mm)	98.5	(inch)	3.88
D (mm)	154.5	(inch)	6.08
E (mm)	925.0	(inch)	36.42
		. ,	0.00

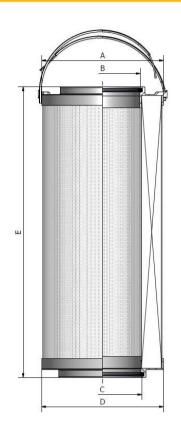



Construction Materials			
Seal(s):	FPM: Fluoroelastomer		
Top Endcap:	Glass reinforced nylon		
Bottom Endcap:	Glass reinforced nylon		
Filter Media:	Multilayer fibreglass with coated mesh on both sides		

Calculated Performance Criteria

Differential Pressure (△p): 0.22 bar @ 900 l/min **Tested to ISO3968** @ **32 cSt** 3.19 psi @ 197.97 gp

Efficiency: >Beta 200 @ 20 microns & greater

>Beta 1000 @ 22 microns & greater

Minimum Collapse Pressure: >10 bar Tested to ISO2941 >145 psi

Dirt Holding Capacity acc. to ISO16889

601.6 gram @ 4 bar terminal pressure drop 601.6 gram @ 58 psi terminal pressure drop

