


Interchange Element Data Sheet

Data sheet created using the Parker Par Fit Toolkit software.

Creation Date:	03/08/2018
Datasheet No:	DS885W
Parker Part No:	938216Q
OEM:	Internormen / Eaton
OEM Part No:	01.E450.10VG.HR.E.V

Product Dimensions

A (mm)	60.0	(inch)	2.36
B (mm)	34.2	(inch)	1.35
D (mm)	60	(inch)	2.36
E (mm)	415.0	(inch)	16.34

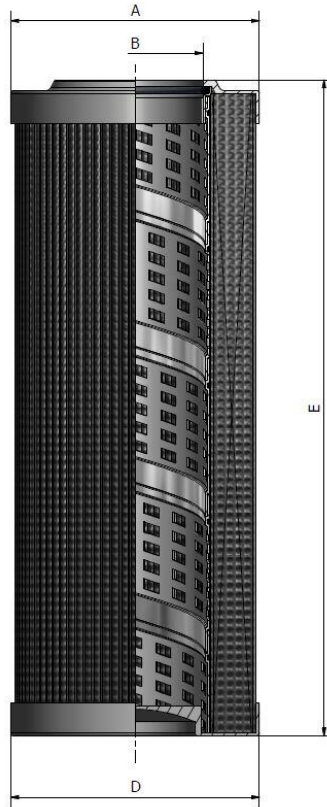

Construction Materials

Seal(s):	FPM: Fluoroelastomer
Top Endcap:	Steel tin plated
Bottom Endcap:	Steel tin plated
Inner Support Cylinder:	Mild steel tin plated
Filter Media:	Multilayer fibreglass with coated mesh on the inflow side and stainless steel mesh on the outlet side

Calculated Performance Criteria

Differential Pressure (Δp):	0.45 bar @ 600 l/min
Tested to ISO3968 @ 32 cSt	6.53 psi @ 131.98 gp
Efficiency:	>Beta 200 @ 10 microns & greater >Beta 1000 @ 12 microns & greater
Minimum Collapse Pressure:	>210 bar
Tested to ISO2941	>3046 psi
Dirt Holding Capacity acc. to ISO16889	>56.4 gram @ 7 bar terminal pressure drop >56.4 gram @ 102 psi terminal pressure drop