


Interchange Element Data Sheet

Data sheet created using the Parker Par Fit Toolkit software.

Creation Date:	03/08/2018
Datasheet No:	DS921W
Parker Part No:	939725Q
OEM:	Internormen / Eaton
OEM Part No:	01.E950.10VG.10.S.V

Product Dimensions

A (mm)	142.0	(inch)	5.59
C (mm)	85.0	(inch)	3.35
D (mm)	142	(inch)	5.59
E (mm)	350.0	(inch)	13.78

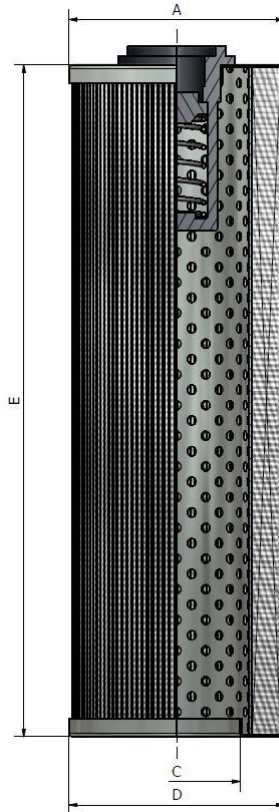

Construction Materials

Seal(s):	FPM: Fluoroelastomer
Top Endcap:	Mild steel tin plated
Bottom Endcap:	Mild steel tin plated
Inner Support Cylinder:	Mild steel tin plated
Filter Media:	Multilayer fibreglass with coated mesh on both sides

Calculated Performance Criteria

Differential Pressure (Δp):	1.00 bar @ 1000 l/min
Tested to ISO3968 @ 32 cSt	14.50 psi @ 219.97 gp
Efficiency:	>Beta 200 @ 9.9 microns & greater >Beta 1000 @ 12.4 microns & greater
Minimum Collapse Pressure:	>10 bar
Tested to ISO2941	>145 psi
Dirt Holding Capacity acc. to ISO16889	>196.5 gram @ 5 bar terminal pressure drop >196.5 gram @ 73 psi terminal pressure drop