


Interchange Element Data Sheet

Data sheet created using the Parker Par Fit Toolkit software.

| | |
|------------------------|--------------|
| Creation Date: | 03/08/2018 |
| Datasheet No: | DS1732W |
| Parker Part No: | 940042Q |
| OEM: | Mahle |
| OEM Part No: | PI8508DRG100 |

Product Dimensions

| | | | |
|---------------|-------|---------------|------|
| A (mm) | 47.0 | (inch) | 1.85 |
| B (mm) | 25.5 | (inch) | 1.00 |
| D (mm) | 47 | (inch) | 1.85 |
| E (mm) | 172.0 | (inch) | 6.77 |

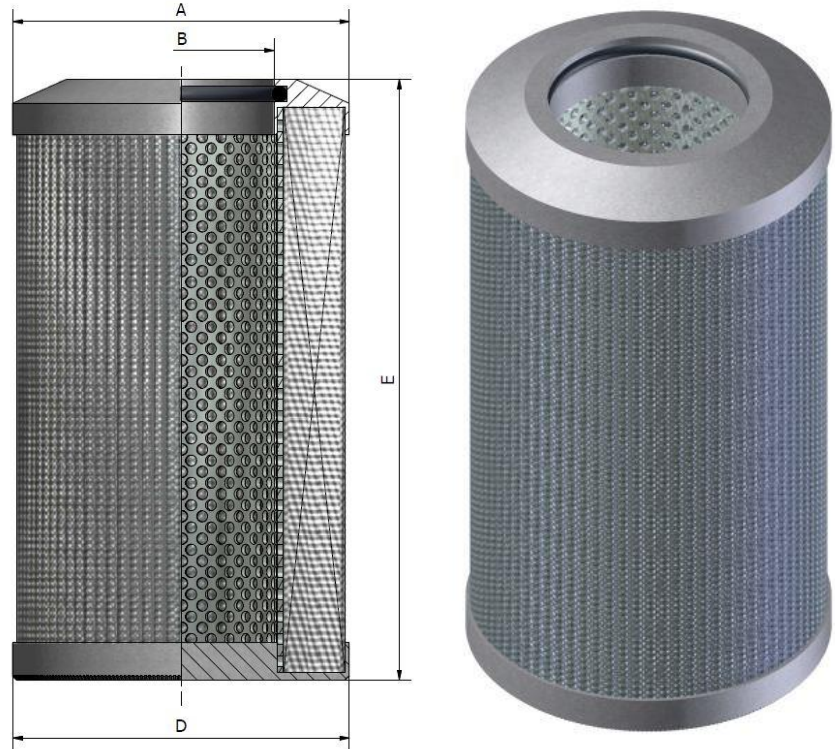

Construction Materials

| | |
|--------------------------------|-----------------------------------|
| Seal(s): | FPM: Fluoroelastomer |
| Top Endcap: | Mild steel tin plated |
| Bottom Endcap: | Mild steel tin plated |
| Inner Support Cylinder: | Mild steel tin plated |
| Filter Media: | Single layer stainless steel mesh |

Calculated Performance Criteria

| | |
|---|---|
| Differential Pressure (Δp): | bar @ l/min |
| Tested to ISO3968 @ 32 cSt | psi @ gpm |
| Efficiency: | >Beta 200 @ microns & greater >Beta 1000 @ microns & greater |
| Minimum Collapse Pressure: | >30 bar |
| Tested to ISO2941 | >435 psi |
| Dirt Holding Capacity acc. to ISO16889 | |

Notes: Efficiency: 100 Micron