


Interchange Element Data Sheet

Data sheet created using the Parker Par Fit Toolkit software.

Creation Date:	03/08/2018
Datasheet No:	DS1717W
Parker Part No:	940371Q
OEM:	Fleetguard
OEM Part No:	HF6319

Product Dimensions

A (mm)	150.0	(inch)	5.91
B (mm)	110.0	(inch)	4.33
C (mm)	110	(inch)	4.33
D (mm)	150.0	(inch)	5.91
E (mm)	450.0	(inch)	17.72

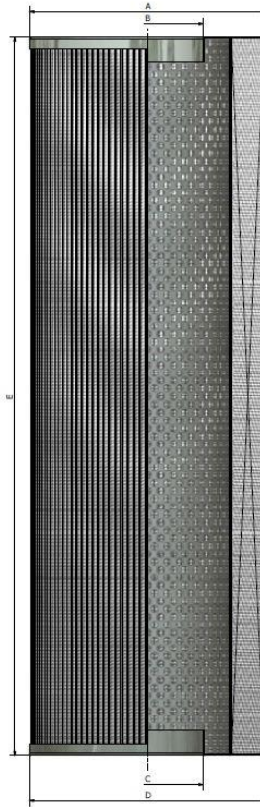

Construction Materials

Top Endcap:	Mild steel tin plated
Bottom Endcap:	Mild steel tin plated
Inner Support Cylinder:	Mild steel tin plated
Filter Media:	Single layer cellulose (paper)

Calculated Performance Criteria

Differential Pressure (Δp):	bar @ l/min
Tested to ISO3968 @ 32 cSt	psi @ gpm
Efficiency:	>Beta 200 @ microns & greater >Beta 1000 @ microns & greater
Minimum Collapse Pressure:	>10 bar
Tested to ISO2941	>145 psi
Dirt Holding Capacity acc. to ISO16889	

Notes: Efficiency: 25 Micron