


Interchange Element Data Sheet

Data sheet created using the Parker Par Fit Toolkit software.

Creation Date:	03/08/2018
Datasheet No:	DS1725W
Parker Part No:	940376Q
OEM:	Fleetguard
OEM Part No:	HF6098

Product Dimensions

A (mm)	130.0	(inch)	5.12
B (mm)	85.0	(inch)	3.35
C (mm)	85	(inch)	3.35
D (mm)	130.0	(inch)	5.12
E (mm)	225.0	(inch)	8.86

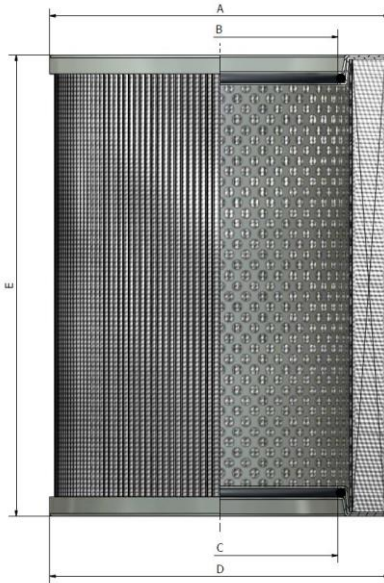

Construction Materials

Seal(s):	Other
Top Endcap:	Mild steel tin plated
Bottom Endcap:	Mild steel tin plated
Inner Support Cylinder:	Mild steel tin plated
Filter Media:	Single layer cellulose (paper) with coated mesh on both sides

Calculated Performance Criteria

Differential Pressure (Δp):	bar @ l/min
Tested to ISO3968 @ 32 cSt	psi @ gpm
Efficiency:	>Beta 200 @ 25 (nominal) microns & great >Beta 1000 @ microns & greater
Minimum Collapse Pressure:	>10 bar
Tested to ISO2941	>145 psi
Dirt Holding Capacity acc. to ISO16889	61.5 gram @ bar terminal pressure drop 61.5 gram @ psi terminal pressure drop