


Interchange Element Data Sheet

Data sheet created using the Parker Par Fit Toolkit software.

Creation Date:	03/08/2018
Datasheet No:	DS1067W
Parker Part No:	943635Q
OEM:	MP Filtri
OEM Part No:	HP1353A10VH&AH

Product Dimensions

A (mm)	51.0	(inch)	2.01
B (mm)	27.1	(inch)	1.07
D (mm)	51	(inch)	2.01
E (mm)	304.0	(inch)	11.97

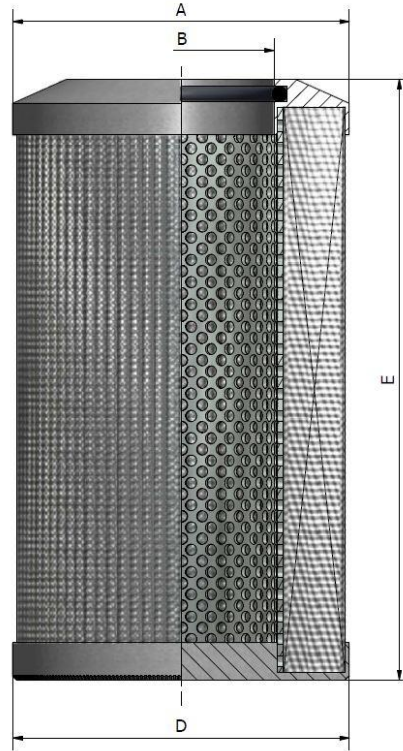

Construction Materials

Seal(s):	FPM: Fluoroelastomer
Top Endcap:	Steel tin plated
Bottom Endcap:	Steel tin plated
Inner Support Cylinder:	Mild steel tin plated
Filter Media:	Multilayer fibreglass with coated mesh on the inflow side and stainless steel mesh on the outlet side

Calculated Performance Criteria

Differential Pressure (Δp):	0.42 bar @ 300 l/min
Tested to ISO3968 @ 32 cSt	6.09 psi @ 65.99 gpm
Efficiency:	>Beta 200 @ 10 microns & greater >Beta 1000 @ 12 microns & greater
Minimum Collapse Pressure:	>210 bar
Tested to ISO2941	>3046 psi
Dirt Holding Capacity acc. to ISO16889	>30.3 gram @ 7 bar terminal pressure drop >30.3 gram @ 102 psi terminal pressure drop