


Interchange Element Data Sheet

Data sheet created using the Parker Par Fit Toolkit software.

Creation Date:	03/08/2018
Datasheet No:	DS1026W
Parker Part No:	943796Q
OEM:	MP Filtri
OEM Part No:	CU025A25V&N

Product Dimensions

A (mm)	52.0	(inch)	2.05
B (mm)	27.5	(inch)	1.08
C (mm)	24.5	(inch)	0.96
D (mm)	52.0	(inch)	2.05
E (mm)	69.0	(inch)	2.72

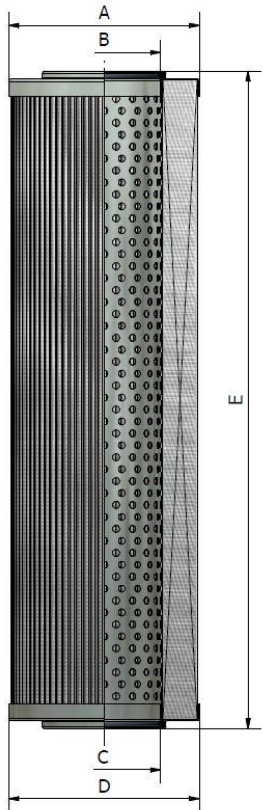

Construction Materials

Seal(s):	FPM: Fluoroelastomer
Top Endcap:	Glass reinforced nylon
Bottom Endcap:	Glass reinforced nylon
Inner Support Cylinder:	Mild steel tin plated
Filter Media:	Multilayer fibreglass with coated mesh on both sides

Calculated Performance Criteria

Differential Pressure (Δp):	0.31 bar @ 25 l/min
Tested to ISO3968 @ 32 cSt	4.50 psi @ 5.50 gpm
Efficiency:	>Beta 200 @ 20 microns & greater >Beta 1000 @ 22 microns & greater
Minimum Collapse Pressure:	>10 bar
Tested to ISO2941	>145 psi
Dirt Holding Capacity acc. to ISO16889	>1.9 gram @ 4 bar terminal pressure drop >1.9 gram @ 58 psi terminal pressure drop