


Interchange Element Data Sheet

Data sheet created using the Parker Par Fit Toolkit software.

Creation Date:	03/08/2018
Datasheet No:	DS1020W
Parker Part No:	943808Q
OEM:	MP Filtri
OEM Part No:	CU200A25V&N

Product Dimensions

A (mm)	99.0	(inch)	3.90
B (mm)	51.5	(inch)	2.03
C (mm)	51.5	(inch)	2.03
D (mm)	99.0	(inch)	3.90
E (mm)	124.0	(inch)	4.88

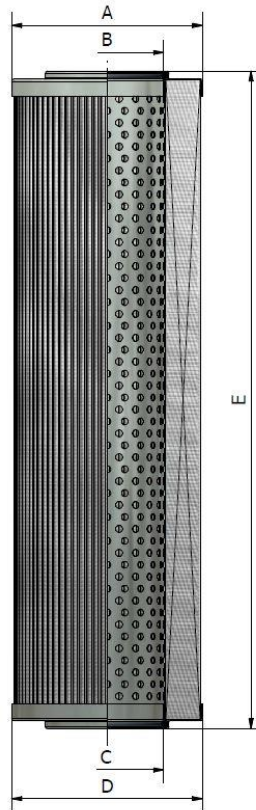

Construction Materials

Seal(s):	FPM: Fluoroelastomer
Top Endcap:	Glass reinforced nylon
Bottom Endcap:	Glass reinforced nylon
Inner Support Cylinder:	Mild steel tin plated
Filter Media:	Multilayer fibreglass with coated mesh on both sides

Calculated Performance Criteria

Differential Pressure (Δp):	0.43 bar @ 200 l/min
Tested to ISO3968 @ 32 cSt	6.25 psi @ 43.99 gpm
Efficiency:	>Beta 200 @ 20 microns & greater >Beta 1000 @ 22 microns & greater
Minimum Collapse Pressure:	>10 bar
Tested to ISO2941	>145 psi
Dirt Holding Capacity acc. to ISO16889	>11.3 gram @ 4 bar terminal pressure drop >11.3 gram @ 58 psi terminal pressure drop