




## Interchange Element Data Sheet

Data sheet created using the Parker Par Fit Toolkit software.

Creation Date:	03/08/2018	
Datasheet No:	DS997W	
Parker Part No:	943928Q	
ОЕМ:	MP Filtri	
OEM Part No:	MR2504A10V&A	
D I . ( D'		

<b>Product Dimensions</b>			
A (mm)	106.0	(inch)	4.17
B (mm)	72.0	(inch)	2.83
C (mm)	10.2	(inch)	0.40
D (mm)	106.0	(inch)	4.17
E (mm)	465.0	(inch)	18.31

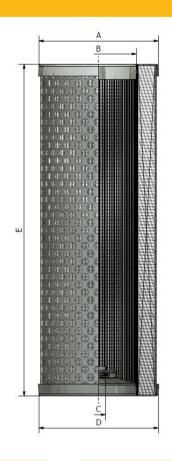



Construction Materials		
Seal(s):	FPM: Fluoroelastomer	
Top Endcap:	Mild steel tin plated	
Bottom Endcap:	Mild steel tin plated	
Outer Support Cylinder:	Mild steel tin plated	
Filter Media:	Multilayer fibreglass with coated mesh on both sides	

## **Calculated Performance Criteria**

**Differential Pressure (△p):** 0.36 bar @ 600 l/min **Tested to ISO3968** @ **32 cSt** 5.22 psi @ 131.98 gp

Efficiency: >Beta 200 @ 10 microns & greater

>Beta 1000 @ 12 microns & greater

Minimum Collapse Pressure: >10 bar Tested to ISO2941 >145 psi

**Dirt Holding Capacity acc. to ISO16889** 

>55.4 gram @ 4 bar terminal pressure drop >55.4 gram @ 58 psi terminal pressure drop

