


2248D-025V32-TC

Ultra high pressure hose for tube cleaning applications



- 20% smaller outer diameter compared to existing products
- Compatible with 9.5 mm nozzles
- Good flexing properties
- Certified acc. to DIN EN 1829-2
- "State of the art" fitting technology
- Worldwide availability through specialised and authorised distributors

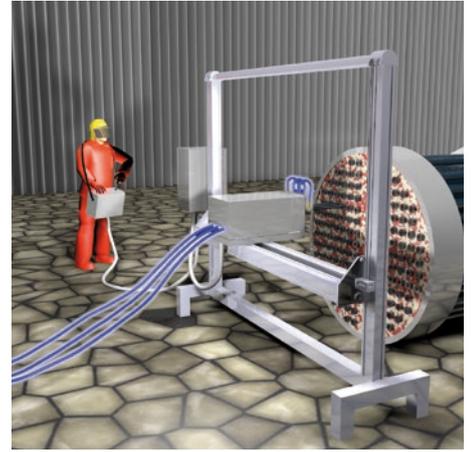

Contact:

**Parker Hannifin Manufacturing
Germany GmbH & Co. KG**
polyflex Division
An der Tuchbleiche 4
D – 68623 Lampertheim
Tel 06256 81-0
Fax 06256 81-123
polyflex@parker.com

www.parker.com/polyflex

Advantages:

- Breakthrough technology with the smallest outer diameter available in the market at **21,750 psi (150 MPa)**
- The 2248D-025V32-TC has been specifically designed for tube cleaning applications

Inner diameter	4.0 mm	0.157 in
Outer diameter	7.9 mm	0.311 in
Bend radius	75 mm	2.953 in
Weight	0.11 kg/m	0.074 lb/ft
Outer diameter ferrule	9.8 mm	0.39 in
Inner diameter nipple	2.3 mm	0.09 in

• Available standard fittings:

- M7
- 1/16" NPT*
- 1/4" UNF LH
- 1/4" UNF RH
- M24 x 1.5 female
- G 1/4" female
- 9/16-18 UNF female

* Working pressure for NPT fittings 15,000 psi (100 MPa)



ENGINEERING YOUR SUCCESS.