


2248D-03V32-TC

Ultra high pressure hose for tube cleaning applications



- Small hose outer diameter of 0.37" (9.5 mm)
- Outer diameter of fitting is only 0.48" (12.1 mm)
- Compatible with 13 mm nozzles
- Good flexing properties
- Certified acc. to DIN EN 1829-2
- "State of the art" fitting technology
- Worldwide availability through specialized and authorised distributors

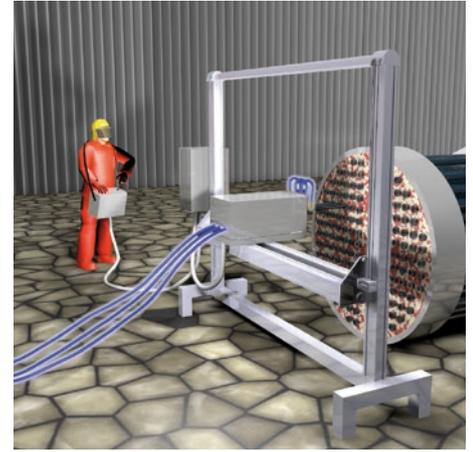

Contact:

**Parker Hannifin Manufacturing
Germany GmbH & Co. KG**
polyflex Division
An der Tuchbleiche 4
D – 68623 Lampertheim
Tel 06256 81-0
Fax 06256 81-123
polyflex@parker.com

www.parker.com/polyflex

Advantages:

- Breakthrough technology with a small outer diameter of 0.37" (9.5 mm), while reaching a working pressure of **20,300 psi (140 MPa)**
- The 2248D-03V32-TC has been specifically designed for tube cleaning applications

Inner diameter	4.9 mm	0.19 in
Outer diameter	9.5 mm	0.37 in
Bend radius	95 mm	3.74 in
Weight	0.14 kg/m	0.094 lb/ft
Outer diameter ferrule	12.1 mm	0.48 in
Inner diameter nipple	2.8 mm	0.11 in

• Available standard fittings:

- M7 and M8
- 1/4 and 1/8 NPT*
- 1/4 LH and RH
- 3/8 LH and RH
- G 1/8 and G 1/4
- 9/16-18 UNF female
- M24 x 1.5 female
- G 1/4 female

* Working pressure for NPT fittings 15,000 psi (100 MPa)



ENGINEERING YOUR SUCCESS.