


PEACH® GEMINI PEACH DEPTH STYLE, GAS FILTER-COALESCING CARTRIDGES

Series PGC


for use in PECO Series PGCPH PEACH Gemini PuraSep® vessels

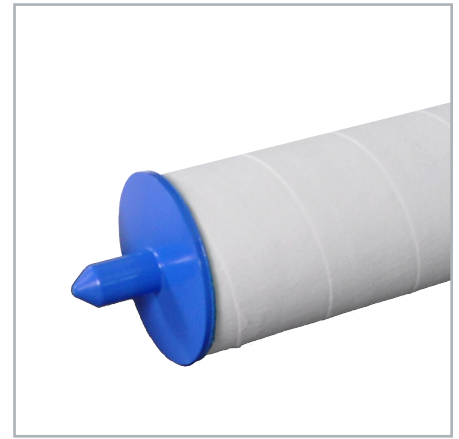

The PEACH Gemini, Series PGC, cartridge is specifically designed for use with the PEACH Gemini PuraSep vessel in natural gas filter-coalescing applications. Its unique patented design provides dual flow path filtration with all the added benefits of PEACH technology. Gas flows outside-to-inside through the 1st Stage of the cartridge where

solid contaminant is captured and liquids are pre-coalesced. Then, as gas travels through the inside diameter of the cartridge at the chevron seal, a smooth transition is made and the gas flows inside-to-outside through the 2nd Stage of the cartridge removing coalesced liquids down to 0.3 microns.

PEACH® is a patented manufacturing process for making a unique depth style filter cartridge. Through thermal bonding, spiral layers of engineered filtration media are applied to conform and overlap each previous layer forming a conical helix pattern. This filter structure results in a gradient density pattern that provides an extraordinary flow path in radial, axial and helical directions. This tortuous flow path yields high contaminant loading, structural strength, maximum efficiency, and an overall outstanding filtration performance.

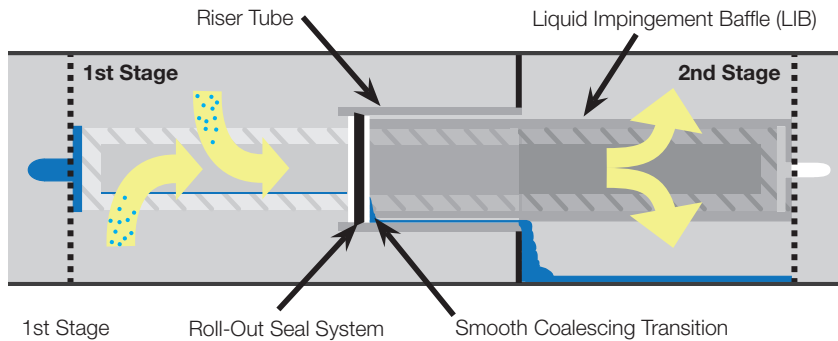


Removes Contaminants such as:

Asphaltenes, Coal Fines, Dirt, Iron Sulfides, Molecular Sieve Dust, Pipe Scale, Salts, Sand, Wear Metals

Coalesces Aerosol Liquid Droplets such as:

Amine, Condensate, Glycol, Lubricating Oils, Water, Low Surface Tension Fluid

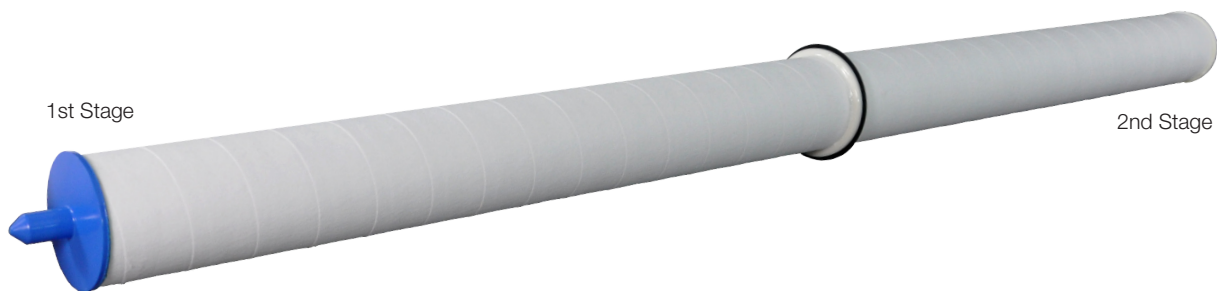

ENGINEERING YOUR SUCCESS.

MATERIALS

COALESCING MEDIA	Polyester or Polypropylene
CORE	No Core or Tin Plated Steel
END CAPS	Polyester or Polypropylene
SEAL	Buna-N, Viton, EPDM, HNBR, Teflon Coated Viton (TCV)

OPERATING DATA

FLOW DIRECTION: 1st Stage: Outside-to-Inside
2nd Stage: Inside-to-Outside

MAX. TEMP: Polypropylene 180°F / 82°C
Polyester 240°F / 116°C

MAX. DIFFERENTIAL PRESSURE: 25 psid / 1.7 bar

RECOMMENDED CHANGE-OUT DIFFERENTIAL PRESSURE: 12–14 psi / 0.8–1.0 bar

NOMINAL DIMENSIONS

SIZE	O.D.	LENGTH
373	4.6" / 117mm	73" / 1854mm
382	4.6" / 117mm	82" / 2083mm
394	4.6" / 117mm	94" / 2388mm

PERFORMANCE

STANDARD RECIPE:

99.99% of 0.3 micron & larger solid particles
99.5% of 0.3 micron & larger liquid droplets
≤ 50 PPB (wt) effluent

PL-20 RECIPE

99.99% of 0.3 micron & larger solid particles
99.99% of 0.3 micron & larger liquid droplets
≤ 8 PPB (wt) effluent

PL-23 RECIPE

99.99% of 0.3 micron & larger solid particles
99.99% of 0.3 micron & larger liquid droplets
99.98% of 0.1 micron & larger liquid droplets
≤ 2 PPB (wt) effluent



PGC	394		V	C	PL-23
SERIES	SIZE	MEDIA / END CAP	SEAL	CORE	PERFORMANCE
	373	CODE MATERIAL	CODE MATERIAL	CODE OPTION	CODE LEVEL
	382	Blank Polyester	Blank Buna-N	Blank No Core	Blank Standard recipe
	394	PP Polypropylene	EPDM Ethylene Propylene Diene Monomer	C Core	PL-20 PL-20 recipe
			V Viton®		PL-23 PL-23 recipe
			HNBR Hydrogenated Buna		
			TVC Teflon® Coated Viton®		



SCAN QR CODE FOR ADDITIONAL PRODUCT INFORMATION INCLUDING AVAILABLE PART NUMBERS

For technical questions contact ipf.technical@support.parker.com or call 940-325-2575

To order, contact a support representative at ipf.support@support.parker.com or call 940-325-2575

Purchasing details: Request a quote at ipf.quotes@support.parker.com

Parker IPF Standard Terms & Conditions apply www.parker.com/IPF-Aftermarket-TOS

- PL-20 and PL-23 recipes come with cores.
- Teflon® and Viton® are registered trademarks of E. I. du Pont de Nemours and Company.

© 2023 Parker Hannifin Corporation
DS-PEACHGEMINI-PGC-230824



Parker Hannifin Corporation
Industrial Process Filtration Division
Phone 940-325-2575 | Toll Free 1-800-877-7326
www.parker.com/ipf