


XtreamPure® PEACH® DEPTH HIGH FLOW RATE STYLE LIQUID FILTER CARTRIDGES

Series XP-PCH

for use in PECO Series 55HX or 55VX XtreamPure® vessels or competitor vessels of similar design

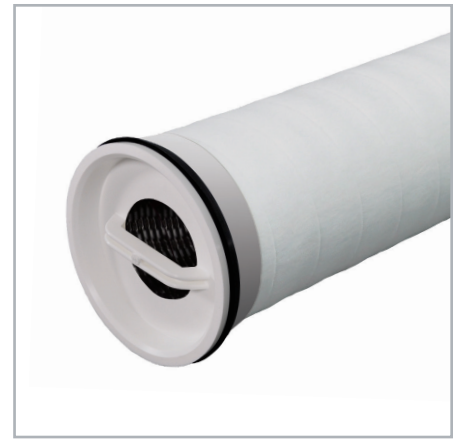

The XtreamPure, Series XP-PCH, is a large 6" diameter cartridge designed to filter liquid from inside-to-outside. This design has several advantages. It allows for high flow rate capability within a single cartridge so fewer cartridges are needed compared to traditional 2.5" and 3" diameter designs. It keeps contaminants trapped within the cartridge, so the vessel remains clean. The cartridge includes a handled end cap with patented chevron seal technology to provide an absolute sealing of the cartridge to the

basket support. This means there is no need for tools when sealing making it a safe, user-friendly choice while also reducing maintenance time and money.

The Series XP-PCH is built using advanced PEACH depth technology which is good for removing deformable or shear-sensitive contaminants. The XP-PCH series is available in polypropylene or polyester media.

FEATURES	BENEFITS
PEACH Technology Configuration	Rigid depth structure maintains porosity and permeability. Unique flow pattern increases fluid residence time, resulting in improved contaminant capture effectiveness over traditional filter technologies
Large Diameter (6") Cartridge	Yields higher flow rates and longer on-stream life than standard 2.5" filters, requiring use of fewer cartridges and cutting capital expenditure
Patented Chevron Seal	Ensures complete sealing compared to a standard O-ring seal, especially when support plate or baskets are out of round
Integrated Handle in End Cap	No tools required for cartridge change-outs yields simple and safe change-outs to reduce downtime
Inside-to-Outside Flow Direction	Contaminant captured inside cartridge provides cleaner and easier extraction during change-outs

APPLICATIONS
<ul style="list-style-type: none"> • Lube Oil • Chemicals & Solvents • Glycol • Process Water



MATERIALS

	XP-PCHL	XP-PCHE
MEDIA	PEACH Polypropylene	PEACH Polyester
END CAPS	Polypropylene	Nylon
CORE	Plated Steel	Plated Steel
SEAL	EPDM	Buna-N (recommended) Viton®, EPDM (optional)
ADHESIVE	None - Thermal Bond	Polyurethane

NOMINAL DIMENSIONS

SIZE	O.D.	I.D.	LENGTH
4	6" / 152mm	3.0" / 76mm	40" / 1016mm
6	6" / 152mm	3.0" / 76mm	60" / 1524mm
8	6" / 152mm	3.0" / 76mm	80" / 2032mm

PERFORMANCE

MICRON RATING: 5, 10, 20, 40, 70, 100

EFFICIENCY: 99.98%

OPERATING DATA

FLOW DIRECTION: Inside-to-Outside

MAX. TEMP: PCHL 180°F / 82°C
PCHE 240°F / 115°C

MAX. DIFFERENTIAL PRESSURE: 50 psid / 3.4 bar

RECOMMENDED CHANGE-OUT DIFFERENTIAL PRESSURE: 35 psid / 2.4 bar

PH RANGE: PCHL 2–14
PCHE 3–9

RECOMMENDED FLOW RATE AT <2 PSID:

300 gpm per 60"L in 1 cP viscosity (10 micron & larger)

Consult factory for flow rate recommendations on less than 10 micron part numbers

XP	PCHE	6	400	V																																						
SERIES	MEDIA	SIZE	PERFORMANCE	SEAL																																						
	<table border="1"> <thead> <tr> <th>CODE</th> <th>MATERIAL</th> </tr> </thead> <tbody> <tr> <td>PCHL</td> <td>Polypropylene</td> </tr> <tr> <td>PCHE</td> <td>Polyester</td> </tr> </tbody> </table>	CODE	MATERIAL	PCHL	Polypropylene	PCHE	Polyester	<table border="1"> <thead> <tr> <th>CODE</th> <th>LENGTH</th> </tr> </thead> <tbody> <tr> <td>4</td> <td>40"</td> </tr> <tr> <td>6</td> <td>60"</td> </tr> <tr> <td>8</td> <td>80"</td> </tr> </tbody> </table>	CODE	LENGTH	4	40"	6	60"	8	80"	<table border="1"> <thead> <tr> <th>CODE</th> <th>MICRON</th> </tr> </thead> <tbody> <tr> <td>050</td> <td>5</td> </tr> <tr> <td>100</td> <td>10</td> </tr> <tr> <td>200</td> <td>20</td> </tr> <tr> <td>300</td> <td>30</td> </tr> <tr> <td>400</td> <td>40</td> </tr> <tr> <td>700</td> <td>70</td> </tr> <tr> <td>1000</td> <td>100</td> </tr> </tbody> </table>	CODE	MICRON	050	5	100	10	200	20	300	30	400	40	700	70	1000	100	<table border="1"> <thead> <tr> <th>CODE</th> <th>MATERIAL</th> </tr> </thead> <tbody> <tr> <td>B</td> <td>Buna-N</td> </tr> <tr> <td>E</td> <td>EPDM</td> </tr> <tr> <td>V</td> <td>Viton®</td> </tr> </tbody> </table>	CODE	MATERIAL	B	Buna-N	E	EPDM	V	Viton®
CODE	MATERIAL																																									
PCHL	Polypropylene																																									
PCHE	Polyester																																									
CODE	LENGTH																																									
4	40"																																									
6	60"																																									
8	80"																																									
CODE	MICRON																																									
050	5																																									
100	10																																									
200	20																																									
300	30																																									
400	40																																									
700	70																																									
1000	100																																									
CODE	MATERIAL																																									
B	Buna-N																																									
E	EPDM																																									
V	Viton®																																									



SCAN QR CODE FOR ADDITIONAL PRODUCT INFORMATION INCLUDING AVAILABLE PART NUMBERS

For technical questions contact ipf.technical@support.parker.com or call 940-325-2575

To order, contact a support representative at ipf.support@support.parker.com or call 940-325-2575

Purchasing details: Request a quote at ipf.quotes@support.parker.com

Parker IPF Standard Terms & Conditions apply www.parker.com/IPF-Aftermarket-TOS

Protected by USA Patent No. 8,961,644.

Viton® is a registered trademark of E. I. du Pont de Numours and Company.

© 2023 Parker Hannifin Corporation
DS-XTREAMPURE-XPPCH-231113

Parker Hannifin Corporation
Industrial Process Filtration Division
Phone 940-325-2575 | Toll Free 1-800-877-7326
www.parker.com/ipf

