


Interchange Element Data Sheet

Data sheet created using the Parker Par Fit Toolkit software.

| | |
|------------------------|------------|
| Creation Date: | 03/08/2018 |
| Datasheet No: | DS952W |
| Parker Part No: | PR4466 |
| OEM: | Argo |
| OEM Part No: | P2.1217-21 |

Product Dimensions

| | | | |
|---------------|-------|---------------|------|
| A (mm) | 118.0 | (inch) | 4.65 |
| B (mm) | 59.5 | (inch) | 2.34 |
| C (mm) | 59.5 | (inch) | 2.34 |
| D (mm) | 118.0 | (inch) | 4.65 |
| E (mm) | 166.0 | (inch) | 6.54 |

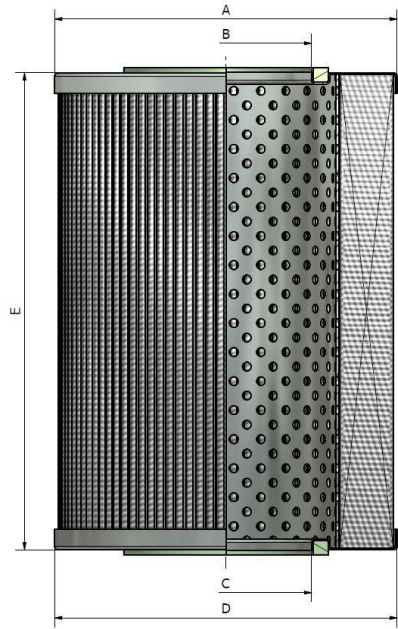

Construction Materials

| | |
|--------------------------------|---|
| Seal(s): | FPM: Fluoroelastomer |
| Top Endcap: | Mild steel zinc plated |
| Bottom Endcap: | Mild steel zinc plated |
| Inner Support Cylinder: | Mild steel zinc plated |
| Outer Support Cylinder: | Mild steel tin plated |
| Filter Media: | Single layer cellulose (paper) with coated mesh on both sides |

Calculated Performance Criteria

| | |
|---|---|
| Differential Pressure (Δp): | 0.38 bar @ 500 l/min |
| Tested to ISO3968 @ 32 cSt | 5.44 psi @ 109.98 gp |
| Efficiency: | >Beta 200 @ N/A microns & greater >Beta 1000 @ N/A microns & greater |
| Minimum Collapse Pressure: | >10 bar |
| Tested to ISO2941 | >145 psi |
| Dirt Holding Capacity acc. to ISO16889 | 32.6 gram @ 4 bar terminal pressure drop 32.6 gram @ 58 psi terminal pressure drop |

Notes: Efficiency: 10 Micron (nominal)