


Interchange Element Data Sheet

Data sheet created using the Parker Par Fit Toolkit software.

Creation Date:	03/08/2018
Datasheet No:	DS958W
Parker Part No:	PR4476
OEM:	Argo
OEM Part No:	V3.0520-08

Product Dimensions

A (mm)	45.5	(inch)	1.79
B (mm)	20.5	(inch)	0.81
D (mm)	45.5	(inch)	1.79
E (mm)	200.0	(inch)	7.87

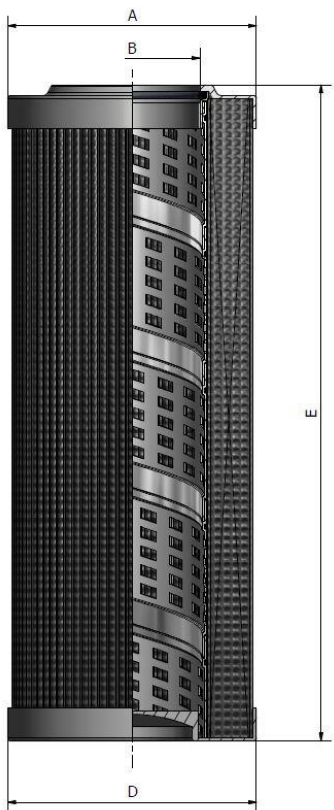

Construction Materials

Seal(s):	FPM: Fluoroelastomer
Top Endcap:	Mild steel tin plated
Bottom Endcap:	Mild steel tin plated
Inner Support Cylinder:	Mild steel tin plated
Filter Media:	Multilayer fibreglass with coated mesh on both sides

Calculated Performance Criteria

Differential Pressure (Δp):	0.38 bar @ 200 l/min
Tested to ISO3968 @ 32 cSt	5.51 psi @ 43.99 gpm
Efficiency:	>Beta 200 @ 20 microns & greater >Beta 1000 @ 22 microns & greater
Minimum Collapse Pressure:	>20 bar
Tested to ISO2941	>290 psi
Dirt Holding Capacity acc. to ISO16889	>18.8 gram @ 7 bar terminal pressure drop >18.8 gram @ 102 psi terminal pressure drop