


Order codes and accessories

ServiceJunior

ServiceJunior with ISO 9001 calibration certificate

Pressure range

- 1...16 bar (-14.5...232 psi)
- 0...100 bar (0...1450 psi)
- 0...400 bar (0...5801 psi)
- 0...600 bar (0...8700 psi)
- 0...1000 bar (0...14503 psi)

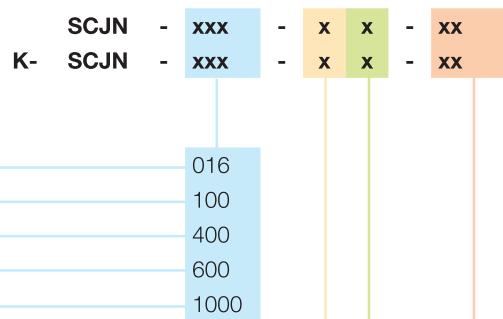

Version

- without data logger
- with data logger

0
L

Accuracy

- 0.5%
- 0.1%
- 0.25%

1
2
3

Adapter

- Standard: SCA-1/4-EMA-3CF adapter (EMA3 M16 x 2)
- PD adapter
- PDP adapter (USA only)
- 4MP adapter (USA only)

PD
PDP
4MP

ServiceJunior kits: Measurement ranges -1...016 bar/0...100 bar/0...400 bar/0...600 bar	Order designation
Scope of delivery:	
<ul style="list-style-type: none"> ■ Equipment case SCC-120 (USA case SCC-300) ■ ServiceJunior SCJN-xxx-x1 (0.5%) incl. adapter (1/4" BSPP female - M16x2 female) SCA-1/4-EMA-3CF ■ Adapter (M16x2 male - M16x2 male) SCA-EMA-3/3 ■ Measuring hose 1,500 mm (M16x2) SMA3-1500CF 	
ServiceJunior kit	SCJN-KIT-xxx
ServiceJunior kit with calibration certificate as per ISO 9001	K-SCJN-KIT-xxx
ServiceJunior kit with PD adapter (USA only)	SCJN-KIT-xxx-PD
ServiceJunior kit with PD adapter and calibration certificate as per ISO 9001 (USA only)	K-SCJN-KIT-xxx-PD
ServiceJunior kit with data logger	SCJN-KIT-xxx-L1
ServiceJunior kit with data logger and ISO 9001 calibration certificate	K-SCJN-KIT-xxx-L1
* only 0.5% accuracy, not available for 1,000 bar	

Spare parts/accessories	Order designation
Equipment case	SCC-120
Blue rubber protection	SCJN-RUBBER-BLU
Green rubber protection	SCJN-RUBBER-GRE
Rubber protection orange	SCJN-RUBBER-ORA
Rubber protection red	SCJN-RUBBER-RED
Black rubber protection	SCJN-RUBBER-BLA