


Push-To-Fit

Solutions for press and joining applications



ENGINEERING YOUR SUCCESS.

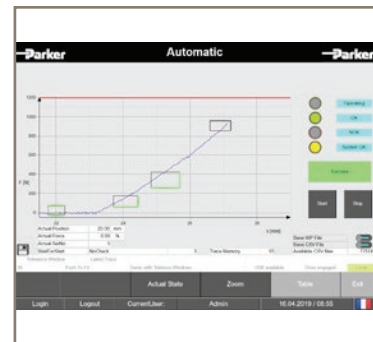

WARNING – USER RESPONSIBILITY

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

- This document and other information from Parker-Hannifin Corporation, its subsidiaries and authorized distributors provide product or system options for further investigation by users having technical expertise.
- The user, through its own analysis and testing, is solely responsible for making the final selection of the system and components and assuring that all performance, endurance, maintenance, safety and warning requirements of the application are met. The user must analyze all aspects of the application, follow applicable industry standards, and follow the information concerning the product in the current product catalog and in any other materials provided from Parker or its subsidiaries or authorized distributors.
- To the extent that Parker or its subsidiaries or authorized distributors provide component or system options based upon data or specifications provided by the user, the user is responsible for determining that such data and specifications are suitable and sufficient for all applications and reasonably foreseeable uses of the components or systems.

Overview	5
Description	5
Advantages	5
Markets	5
Description	6
Technical Characteristics.....	8
Service Life	9
Application Tool Functionalities.....	11
Primary Functionalities	11
Dimensions	14
Accessories.....	15
Order Code.....	16

Parker Hannifin

The global leader in motion and control technologies

A world class player on a local stage

Global Product Design

Parker Hannifin has more than 40 years experience in the design and manufacturing of drives, controls, motors and mechanical products. With dedicated global product development teams, Parker draws on industry-leading technological leadership and experience from engineering teams in Europe, North America and Asia.

Local Application Expertise

Parker has local engineering resources committed to adapting and applying our current products and technologies to best fit our customers' needs.

Manufacturing to Meet Our Customers' Needs

Parker is committed to meeting the increasing service demands that our customers require to succeed in the global industrial market. Parker's manufacturing teams seek continuous improvement through the implementation of lean manufacturing methods throughout the process. We measure ourselves on meeting our customers' expectations of quality and delivery, not just our own. In order to meet these expectations, Parker operates and continues to invest in our manufacturing facilities in Europe, North America and Asia.

Electromechanical Worldwide Manufacturing Locations

Europe

Littlehampton, United Kingdom
Dijon, France
Offenburg, Germany
Filderstadt, Germany
Milan, Italy

Asia

Wuxi, China
Jangan, Korea
Chennai, India

North America

Rohnert Park, California
Irwin, Pennsylvania
Charlotte, North Carolina
New Ulm, Minnesota



Offenburg, Germany

Local Manufacturing and Support in Europe

Parker provides sales assistance and local technical support through a network of dedicated sales teams and authorized technical distributors throughout Europe.

For contact information, please refer to the Sales Offices on the back cover of this document or visit www.parker.com



Milan, Italy



Littlehampton, UK



Filderstadt, Germany




Dijon, France

Push-To-Fit - PTF

Overview

Description

Push-To-Fit is an electromechanical solution for servo presses and joining applications, the key processes in modern automated manufacturing. Combining its established core products into a joining module, Parker offers a reliable, energy efficient and cost-effective solution to serve customers critical applications in harsh industrial environments. All single components of the PTF module are designed to fulfill highest expectations concerning force, dynamic, precision and service life.

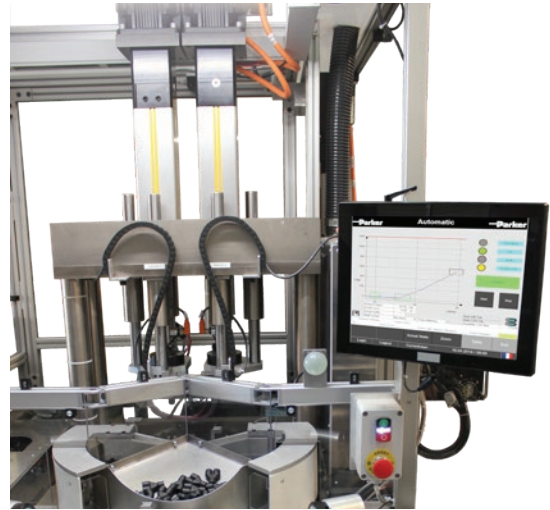

Advantages

Energy savings

- Electromechanical offers greater efficiency in comparison to other technologies such as hydraulics and pneumatics
- Quiet, clean and energy saving technology

Excellent throughput rates

- Thanks to high travel speed up to 450mm/s

Quick and easy integration

- A wide range of Ethernet based fieldbuses
- Ease of use
- Parker's established and reliable core products
- Short delivery time

Cost-effective and highly flexible solution

- Different thrust forces
- Multiple stroke length
- Functional safety
- You only buy what you need

Functional Safety

- Hardware STO as standard
- Safety PLC with STO over FSoE and functions like SS1, SLS, SBC and SBT
- External safety brake

Markets

- General Industrial Assembly
- In-Plant Automotive (gearbox assembly, motor assembly, ...)

Technical Characteristics - Overview

Modules	PTF009 / PTF025 / PTF056 / PTF114
Max. dynamic traction/thrust force	up to 114 kN
Max. stroke	up to 600 mm
Max. travel speed	up to 450 mm/s
Max. acceleration	up to 8.5 m/s ²
Repeatability	+/- 0.03 mm
Motion profile	up to 20 instructions
Tolerance band	50 points per limit (upper / lower)
Tolerance window	5 windows per workpiece and 11 different types
Program cycle time	1 ms
Measuring samples per motion profile	up to 2000
Sampling time	1 ms to 30 ms
Number of different workpieces	500
Internal curve storage per workpiece	500

Description

Parker HMI

- Simplify and reduce cost in visualisation applications.
- Designed to optimize performance, storage and connectivity.
- Compact, no fan – no maintenance
- Brilliant display and low power consumption
- High resolution touch screen with 10" or 15"
- Sealed / protected against dust, dirt, and splash water (front side)
- System integration via Ethernet
- Integrated Web Browser



Parker HMI

Process Control Unit

- Integrated Web Visualisation
- Integrated Security for customized access
- Multiple languages supported
- Robust and industrialised rugged hardware without moving parts
- Insertable SD Memory Card and low voltage technology, fanless operation guarantees „no maintenance“
- Standardised and open Interfaces for simple system integration via Ethernet
- Dual LAN TCP/IP as standard
- USB flash drive for data storage and easy access e.g. via FTP.



Process Control Unit


EtherCAT®



PSD1S

Parker Servo Drive PSD1S/M

- HiPerface DSL feedback®
- Reduced cabling; only one cable connection between drive & motor
- EtherCAT communication
- Quick and easy wiring
- Removable SD card
- CE Conformity & UL / cUL Compliant
- Hardware STO (max PLe according EN ISO13849)
- Safety Option Board

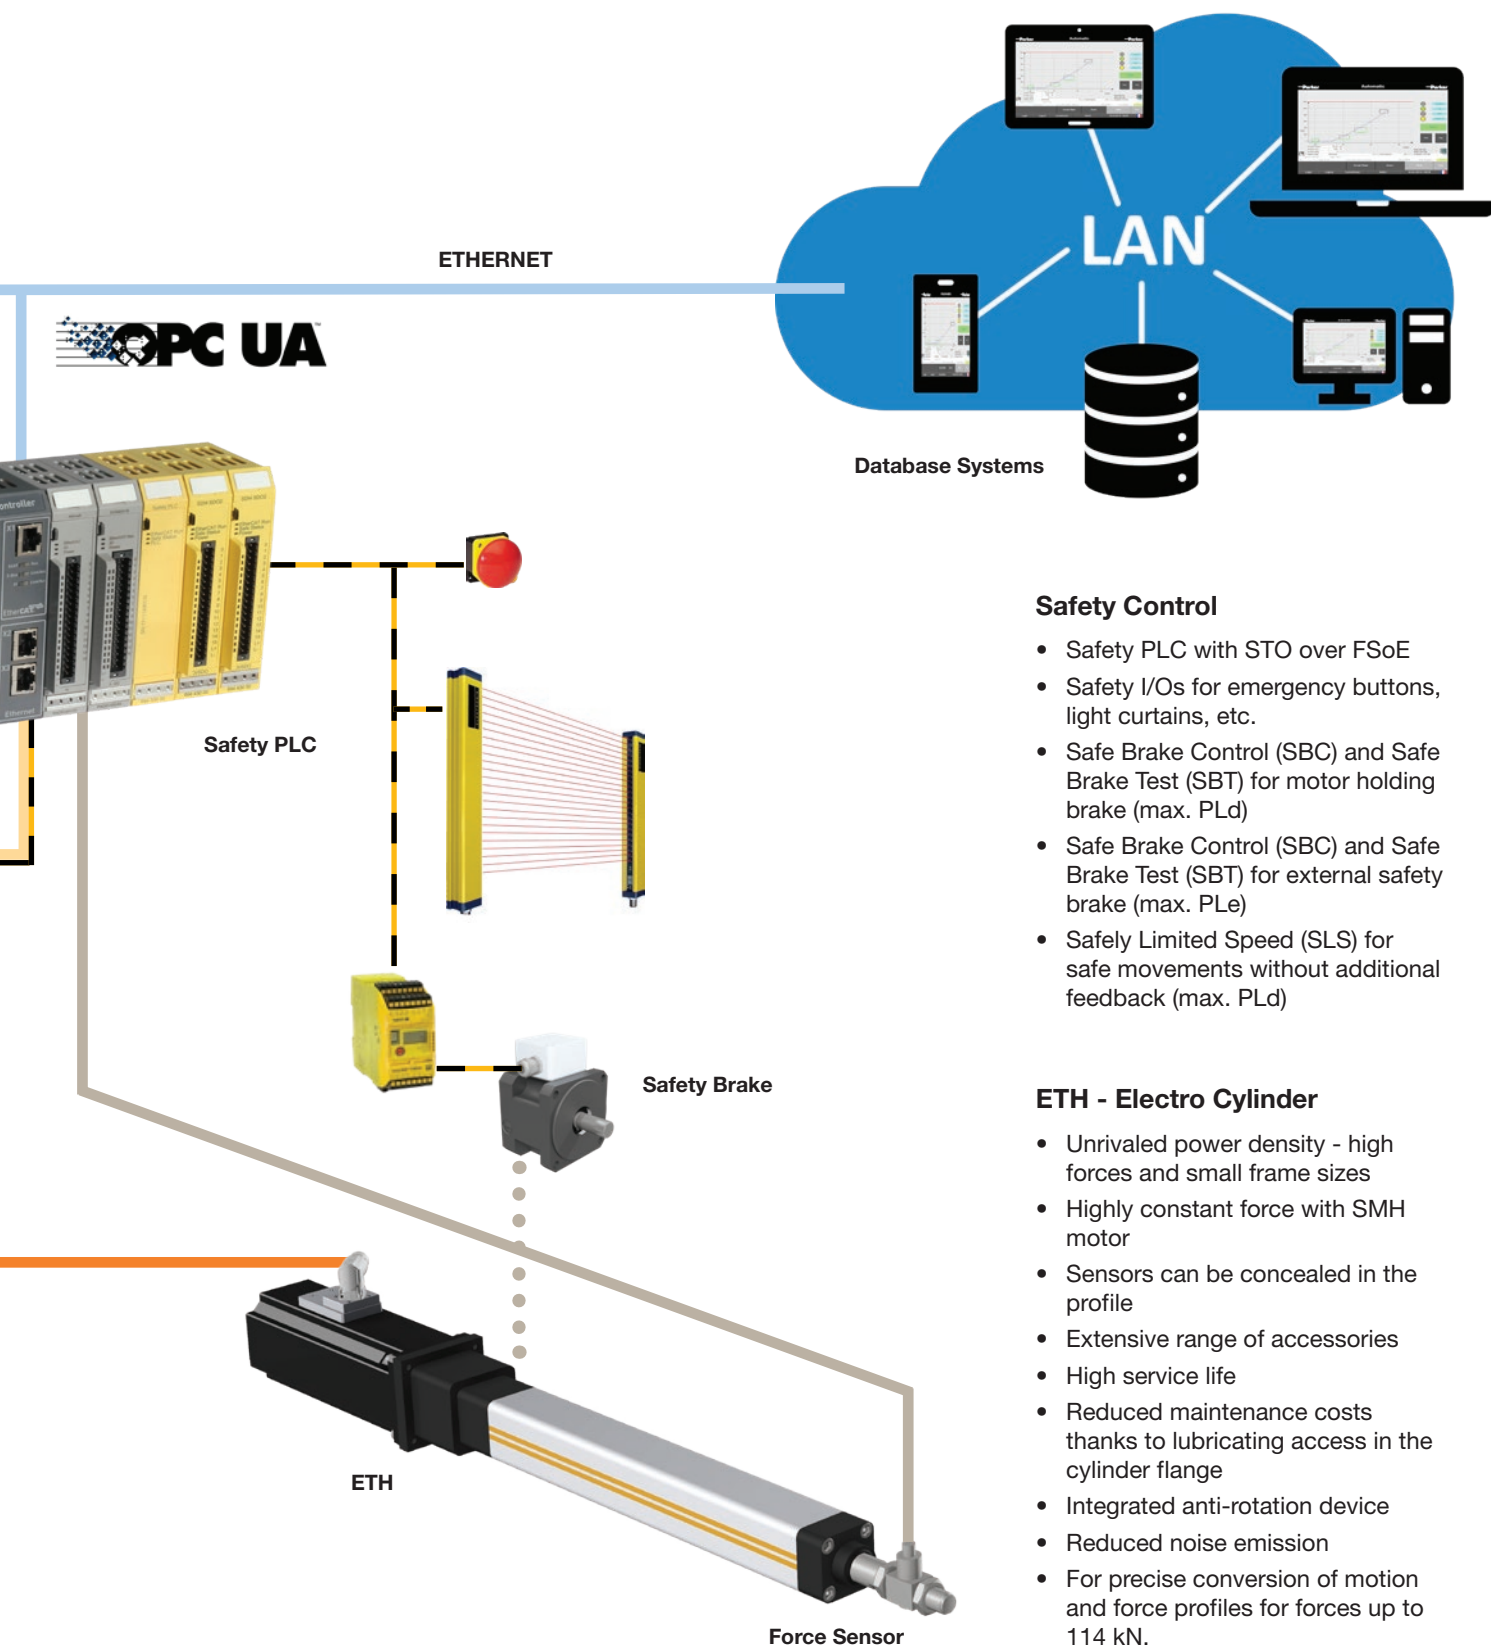

Safety Control

- Safety PLC with STO over FSoE
- Safety I/Os for emergency buttons, light curtains, etc.
- Safe Brake Control (SBC) and Safe Brake Test (SBT) for motor holding brake (max. PLd)
- Safe Brake Control (SBC) and Safe Brake Test (SBT) for external safety brake (max. PLe)
- Safely Limited Speed (SLS) for safe movements without additional feedback (max. PLd)

ETH - Electro Cylinder

- Unrivaled power density - high forces and small frame sizes
- Highly constant force with SMH motor
- Sensors can be concealed in the profile
- Extensive range of accessories
- High service life
- Reduced maintenance costs thanks to lubricating access in the cylinder flange
- Integrated anti-rotation device
- Reduced noise emission
- For precise conversion of motion and force profiles for forces up to 114 kN.

Force Sensor

- Measuring range: ± 9.3 up to ± 114 kN
- Corrosion resistant stainless steel version
- Integrated amplifier
- High shock and vibration resistance
- Long term stability
- Simple mounting

Technical Characteristics

Push-To-Fit	Unit	PTF009	PTF025	PTF056	PTF114
Force, stroke, payload, speed, acceleration					
Max. axial traction / thrust force ($\leq 2s$)	kN	9.3	25.1	56	114
Max. continuous axial force (traction / thrust force)	kN	4.9	12.8	32.1	84.1
Max. stroke ²⁾	mm	300	600	600	600
Max. payload	kg	100	200	400	1000
Max. travel speed	mm/s	250	450	200	133
Max. acceleration	mm/s ²	4000	8000	8500	6000
Accuracy					
Repeatability (according ISO230-2)	mm	±0.03			
Linearity Deviation	kN	±0.04	±0.1	±0.2	±0.4
Weight					
Drive train	kg	7.9	38.7	70.6	166.5
Drive train with safety brake	kg	13	51.2	83.1	190.1
Mass of additional stroke	kg/m	8.2	18.2	38	62
Electrical Data					
Input Voltage (AC)	V	230V	3*400V		
Input Current (RMS)	A	11	22		
Lubrication Intervals ³⁾					
Normal operating conditions ¹⁾	km	240	480	570	570
Short-Stroke conditions	mm	$\leq 12.5^{2)}$	$\leq 25^{2)}$	$\leq 50^{2)}$	
		every 10 000 movement cycles			
Ambient Conditions					
Ambient temperature	°C	0..40			
Max. operating humidity (non-condensing)	%	80			
Altitude		1000 m ASL. Derate force by 1.0 % per 100 m up to a max. altitude of 2000 m			
Software					
Motion profile instructions		20			
Tolerance band points per limit (upper / lower)		50			
Numer of tolerance windows per workpiece		5			
Number of different tolerance window types		11			
Programm cycle time	ms	1			
Sampling time	ms	1-30			
Measuring samples per motion profile		2000			
Number of different workpieces		500			
Number of internal curve storage per workpiece		500			

¹⁾ See ETH user manual www.parker.com/eme/eth


²⁾ Total travel of the cylinder in one direction within one cycle

³⁾ The cylinder must be relubricated at least once per year

Service Life

Nominal service life¹⁾

To determine the service life first the force for each individual segment of the application cycle needs to be calculated according equation 1).

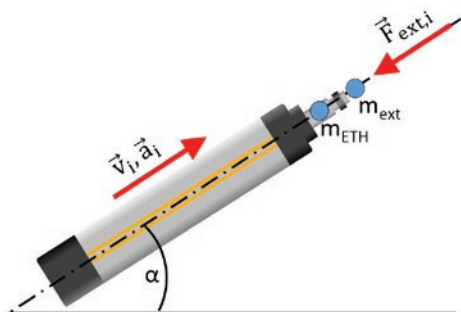

Push-To-Fit	m _{ETH}	ρ _i
PTF009	2.34kg	8.2kg/m
PTF025	7.92kg	18.2kg/m
PTF056	26.2kg	38kg/m
PTF114	68.3kg	62kg/m

$$F_{x,i} = F_{ext,i} + (m_{ETH} + \rho_i \cdot l_{stroke} + m_{ext}) \cdot (a_n + \sin(\alpha) \cdot g) \quad \text{Formula 1}^2$$

F _{x,i}	Axial force in N	m _{ext}	External mass in kg
F _{ext,i}	External axial force in N	a _n	Acceleration at the cylinder rod in m/s ²
m _{ETH}	Mass of the cylinder in kg	α	Alignment angle in °
l _{stroke}	Stroke in m	g	Gravitational acceleration 9.81 m/s ²
ρ _i	Mass per length (stroke) in kg/m		

The equivalent forces F_{m1} and F_{m2} to determine the nominal service life result from the sum of the positive and negative forces respectively weighted with the travel distance, according to equations (2) and (3).

$$F_{m1} = \sqrt[3]{\frac{1}{S_{total}} \cdot \sum_{i=1}^n F_{x,i}^3 \cdot s_i} = \sqrt[3]{\frac{1}{S_{total}} \cdot (F_{x,1}^3 \cdot s_1 + F_{x,2}^3 \cdot s_2 + \dots + F_{x,n}^3 \cdot s_n)} \quad F_{x,i} = \begin{cases} F_{x,i} & F_{x,i} \geq 0 \\ 0, & F_{x,i} < 0 \end{cases}$$


Formula 2

$$F_{m2} = \sqrt[3]{\frac{1}{S_{total}} \cdot \sum_{i=1}^n |F_{x,i}^3| \cdot s_i} = \sqrt[3]{\frac{1}{S_{total}} \cdot (|F_{x,1}^3| \cdot s_1 + |F_{x,2}^3| \cdot s_2 + \dots + |F_{x,n}^3| \cdot s_n)} \quad F_{x,i} = \begin{cases} F_{x,i} & F_{x,i} < 0 \\ 0, & F_{x,i} \geq 0 \end{cases}$$

Formula 3

F_{m1/2} Equivalent force in N
S_{total} Total travel in m
F_{x,i} Axial force in N
s_i Travel t force F_{x,i} in m

With the aid of the diagram and the equivalent forces F_{m1}, F_{m2} the nominal service life L1 and L2 can be determined. The total nominal life L results from the these two figures and equation (4).

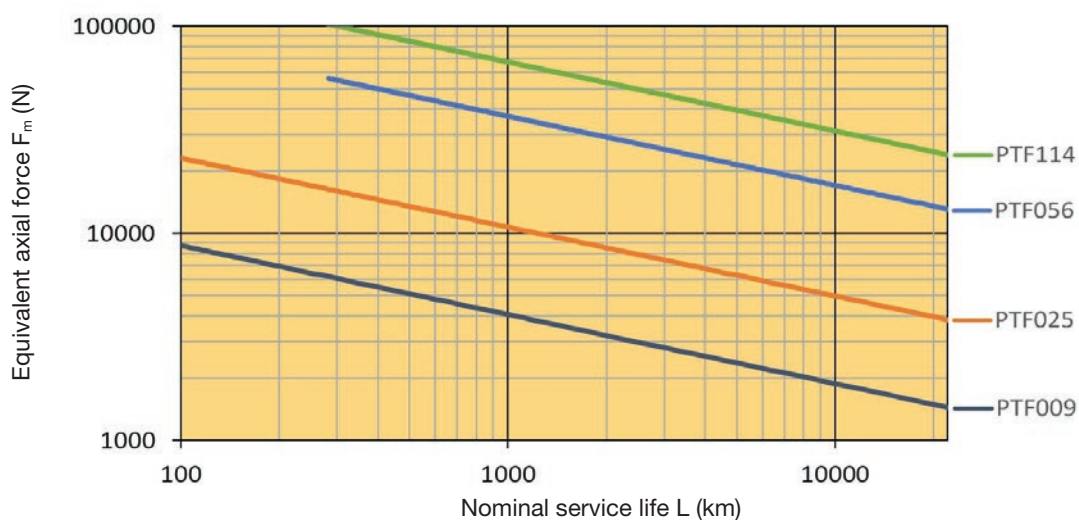

$$L = (L_1^{-1.11} + L_2^{-1.11})^{-0.9} \quad \text{Formula 4}$$

L Nominal service life in km

¹⁾ The nominal service life is the service life reached by 90 % of a sufficient number of similar electro cylinders until the first signs of material fatigue occur.

²⁾ Simplified calculation without the consideration of external friction.

Actual service life

With the application factors f_{w1} , f_{w2} and equation (5), the service life L_{fw} is obtained.

Application factor f_{w1}

Push-To-Fit	Travel ¹⁾	Shocks/vibration			
		none	light	medium	heavy
PTF009	> 12.5 mm	1	1.2	1.4	1.7
PTF025	> 25 mm				
PTF056/PTF114	> 50 mm				
PTF009	< 12.5 mm	1.8	2.1	2.5	3.0
PTF025	< 25 mm				
PTF056/PTF114	< 50 mm				

Application factor f_{w2}

Push-To-Fit	Max. Force	f_{w2}
PTF009	< 7kN	1.1
	7kN...9.3kN	1.2
PTF025	< 15.1kN	1.1
	15.1kN...25.1kN	1.2
PTF056	< 46kN	1.1
	46kN...56kN	1.2
PTF114	< 96kN	1.1
	96kN...114kN	1.2

$$L_{fw} = \frac{L}{(f_{w1} \cdot f_{w2})^3} \quad \text{Formula 5}$$

L Nominal service life in km
 L_{fw} Service life considering the application factors in km
 f_{w1}, f_{w2} Application factors

¹⁾ Total travel of the cylinder in one direction within a cycle

Application Tool Functionalities

The hub of the solution is the process control unit that supports easy integration into existing plant networks and provides simple, convenient parametrization, visualization and operation.

Features

- Real-time control information
- Historical / trend data for easy set-up (up to 500 per workpiece)
- Data can be saved as CSV file
- Adjustable sampling time
- Autocalibration
- Sensor configuration
- Database / Interfacing
- Multiple languages (German, English, French, others on request)
- Operator and service levels (adjustable user level by password)
- Different motion profile instructions
- Sequence program and step enabling condition
- Monitoring via tolerance band or tolerance windows
- Error handling and configurable response
- Status display (information in plain text)
- Status page of fieldbus interface

Functional Safety

Push-To-Fit is supplied with Safe Torque Off (STO) as standard to set the drive safely to a non-torque state. In addition, advanced functional safety is available with a safety PLC. Acting as a Fail Safe over EtherCAT (FSoE) master the safety PLC uses the EtherCAT fieldbus to establish safe communication to the safety I/O modules and the drive. Separate wiring is not necessary. The first expansion stage includes Safely Limited Speed (SLS) and Safe Brake Control / Safe Brake Test (SBC/SBT) for the internal motor holding brake. The second comprises an additional external safety brake with SBC/SBT up to PLE.

Primary Functionalities

Sensor Calibration

Adjustment of the force sensor with the aid of a second measuring system. The value of the reference force of the second measuring system is entered in the input field for the reference force.

The system calculates the correction factor and stores it. Alternatively, the correction factor can be entered directly.

In addition to this basic setting, automatic offset correction in automatic mode can be activated.

Definition of the Motion Profile

- Sequential program with step enabling conditions
- Entry mask for motion profile instructions (up to 20)
- Absolute or relative positioning
- Velocity
- Acceleration/Deceleration
- Jerk
- Step enabling conditions via input, delay time, force trigger or position trigger

Cnt	Pos (mm)	Speed (mm/s)	Acc (mm/s²)	Dec (mm/s²)	Jerk (mm/s³)	Thrust (N)	TForce (N)	tMo	OutMo	WTime (s)	
1	20.00	5.00	4000.00	10000.00	1000000.00	0.00	0.00	0	C	0	
2	1	20.00	5.00	4000.00	10000.00	1000000.00	0.00	0.00	0	C	0
3	0	0.00	0.00	4000.00	10000.00	1000000.00	0.00	0.00	0	C	0
4	0	0.00	0.00	4000.00	10000.00	1000000.00	0.00	0.00	0	C	0
5	0	0.00	0.00	4000.00	10000.00	1000000.00	0.00	0.00	0	C	0
6	0	0.00	0.00	4000.00	10000.00	1000000.00	0.00	0.00	0	C	0
7	0	0.00	0.00	4000.00	10000.00	1000000.00	0.00	0.00	0	C	0
8	0	0.00	0.00	4000.00	10000.00	1000000.00	0.00	0.00	0	C	0
9	0	0.00	0.00	4000.00	10000.00	1000000.00	0.00	0.00	0	C	0
10	0	0.00	0.00	4000.00	10000.00	1000000.00	0.00	0.00	0	C	0
11	0	0.00	0.00	4000.00	10000.00	1000000.00	0.00	0.00	0	C	0
12	0	0.00	0.00	4000.00	10000.00	1000000.00	0.00	0.00	0	C	0
13	0	0.00	0.00	4000.00	10000.00	1000000.00	0.00	0.00	0	C	0
14	0	0.00	0.00	4000.00	10000.00	1000000.00	0.00	0.00	0	C	0
15	0	0.00	0.00	4000.00	10000.00	1000000.00	0.00	0.00	0	C	0
16	0	0.00	0.00	4000.00	10000.00	1000000.00	0.00	0.00	0	C	0
17	0	0.00	0.00	4000.00	10000.00	1000000.00	0.00	0.00	0	C	0
18	0	0.00	0.00	4000.00	10000.00	1000000.00	0.00	0.00	0	C	0
19	0	0.00	0.00	4000.00	10000.00	1000000.00	0.00	0.00	0	C	0
20	0	0.00	0.00	4000.00	10000.00	1000000.00	0.00	0.00	0	C	0


Tolerance Band

User defined tolerance band with up to 50 points per limit (each for the upper and lower one)

- Add or change point with mouse or by value
- Remove point or the whole curve

As long as the force is within the band, the process is in a good condition.



The feature to filter the 100 most recent curves (good / bad / all) and display all together helps to easy set-up the monitoring method.

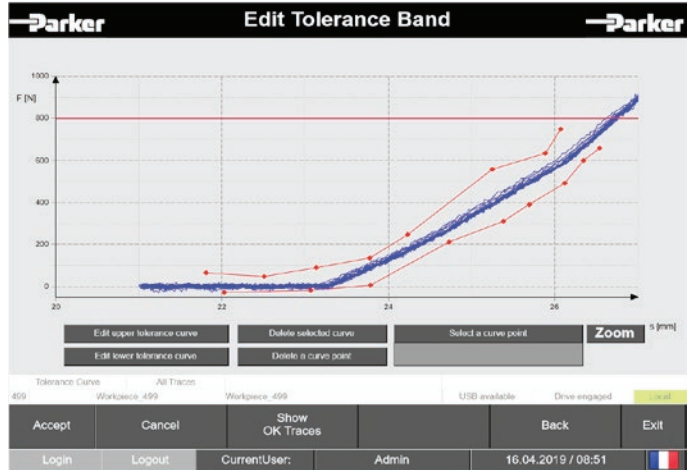

Tolerance Window

Monitoring of the force using predefined tolerance windows (up to 5). There is a choice of 11 predefined window types. Windows can be defined with drag and drop or by values.


The feature to filter the 100 most recent curves (good / bad / all) and display all together helps to easy set-up the monitoring method.

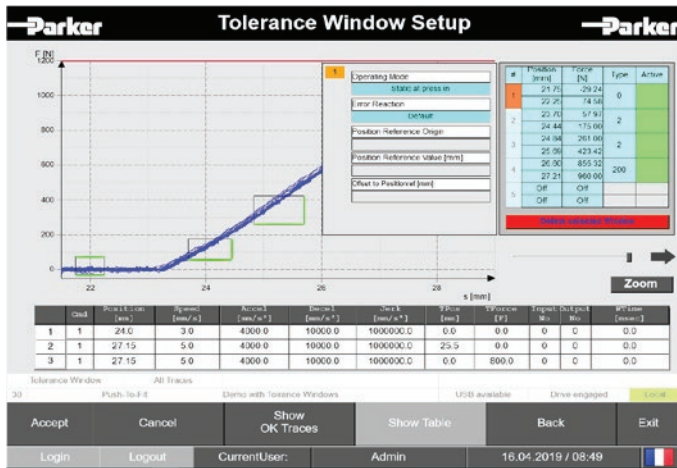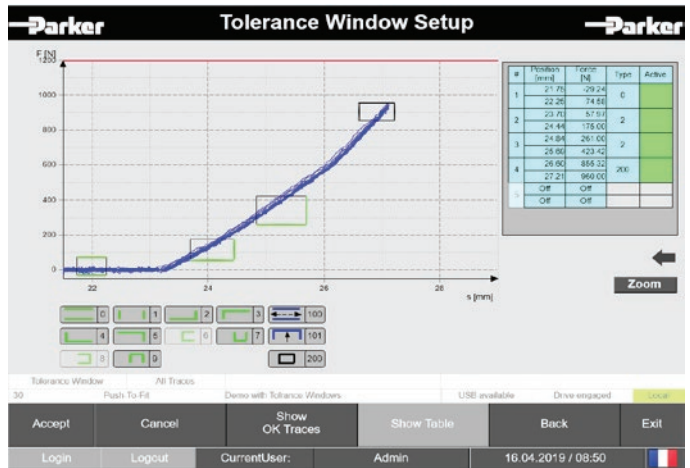

In addition it is possible to use dynamic tolerance windows. According to a position instruction and a related trigger the window is shifted about a defined value.

Automatic Mode

During each joining procedure real-time data as force-position curve is displayed. All tolerance windows and the tolerance band are shown as well. Additional information are available below and next to the graph. The tolerance window boundaries and the status field indicate a good or bad part with a red and green color, respectively.

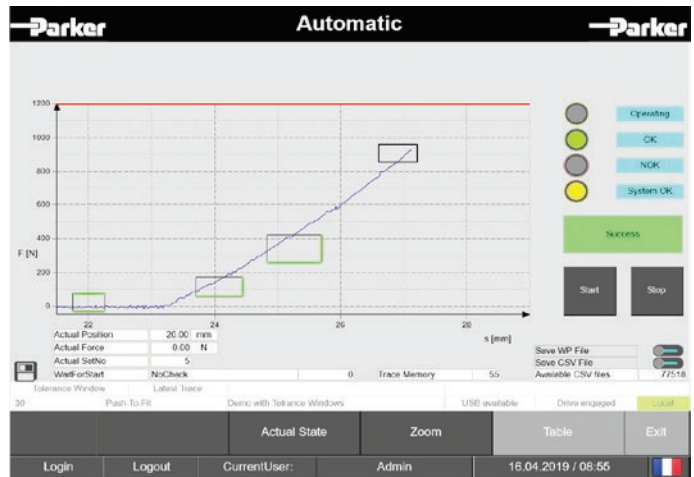


Analyze Raw Data

The last 500 curves are available by curve number and part number. The result as well as each measuring sample (position, force and time stamp) can be viewed.


	Position [mm]	Force [N]	Time Stamp [ms]
0	21 0080	4.83	1
1	21 0110	2.41	2
2	21 0142	0.00	3
3	21 0172	0.00	4
4	21 0203	- 2.41	5
5	21 0235	2.41	6
6	21 0268	2.41	7
7	21 0300	4.83	8
8	21 0332	2.41	9
9	21 0364	7.24	10
10	21 0396	9.65	11
11	21 0429	4.83	12
12	21 0461	- 4.83	13
13	21 0493	0.00	14
14	21 0523	2.41	15
15	21 0555	0.00	16
16	21 0585	2.41	17
17	21 0615	2.41	18
18	21 0646	7.24	19

Analyze Diagram

The last 500 curves can be displayed. The 100 most recent curves can be filtered (good / bad / all) and viewed together. The result as well as the tolerance windows or the tolerance band is displayed according to each measurement.

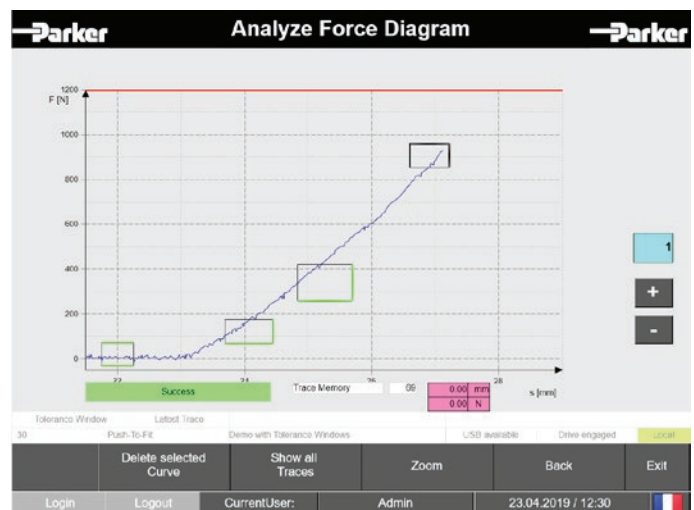

Dimensions

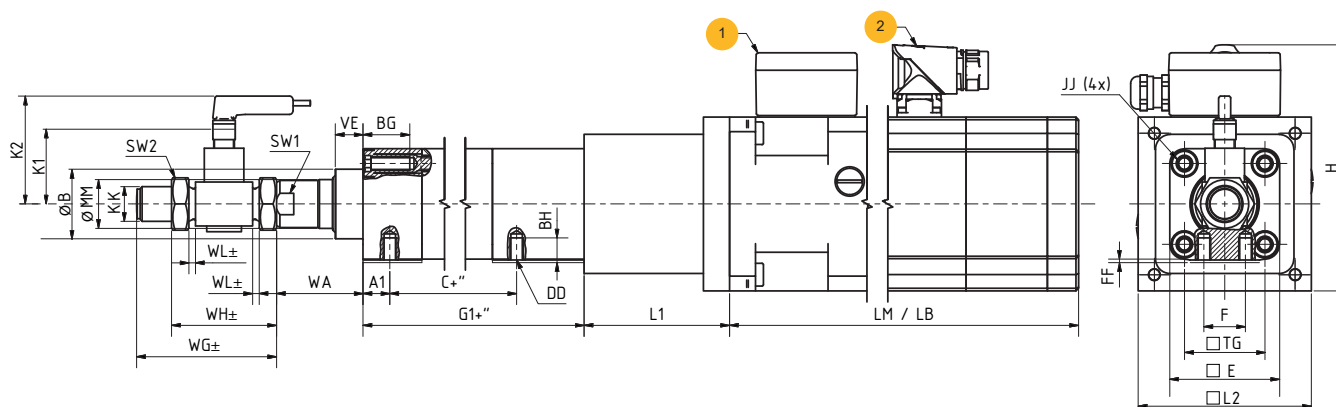

1 Terminal box optional safety brake

2 Motor connector

+ '' = Dimension + length of desired stroke

Position and orientation Sensor and motor connectors may differ from the illustration

	Unit	PTF009	PTF025	PTF056	PTF114
C+''	[mm]	99.5	159.5	- ¹⁾	- ¹⁾
G1+''	[mm]	154	215	361	549
A1	[mm]	15.5	21	-	-
BG (=BN+BS)	[mm]	25	26	32	44
BN Usable thread length	[mm]	20	20	22	33
BS Depth of key (without thread)	[mm]	5	6	10	11
BH	[mm]	12.7	18.5	- ¹⁾	- ¹⁾
DD	[mm]	M8x1.25	M12x1.75	- ¹⁾	- ¹⁾
E	[mm]	63,5	95	120	150
F	[mm]	24	30	- ¹⁾	- ¹⁾
FF	[mm]	0.5	1	- ¹⁾	- ¹⁾
H	[mm]	141.6	191.6	196.5	281.6
JJ	[mm]	M8x1.25	M10x1.5	M16x2	M20x2.5
K1	[mm]	73	73	85	85
K2	[mm]	91.5	91.5	101	101
KK	[mm]	M20x1.5	M24x2	M45x3	M45x3
L1	[mm]	84	116.5	160	226.5
L2	[mm]	100	155	155	205
LM / LB ²⁾	[mm]	238.5 / 318.5	510 / 629	666.5 / 785.5	742.5 / 881
SW1	[mm]	24	30	60	70
SW2	[mm]	30	36	70	70
TG	[mm]	46,5	72	89	105
VE	[mm]	16	20	20	20
WA	[mm]	60	59	92	123
WG ³⁾	[mm]	80.8 ± 1,5	107 ± 2	184.4 ± 3	184.4 ± 3
WH ³⁾	[mm]	60.6 ± 1,5	84 ± 2	136 ± 3	136 ± 3
ØB	[mm]	40 d11	60 d11	90 d8	110 d8
ØMM h9	[mm]	28	45	70	85

¹⁾ PTF056 and PTF114 does not have a mounting thread on the underside.

²⁾ LM without optional safety brake / LB with optional safety brake

³⁾ Screw-in depth of the force sensor can vary by the thread pitch.

Accessories

Motor cable


Description	PTF009	PTF025 / PTF056	PTF114
3 m	CBM015HD-M23-PSX-0030-00	CBM025HD-M23-PMX-0030-00	CBM040HD-M23-PMX-0030-00
5 m	CBM015HD-M23-PSX-0050-00	CBM025HD-M23-PMX-0050-00	CBM040HD-M23-PMX-0050-00
10 m	CBM015HD-M23-PSX-0100-00	CBM025HD-M23-PMX-0100-00	CBM040HD-M23-PMX-0100-00

Sensor cable

Description	PTF009 / 025 / 056 / 114
5 m	080-900467
10 m	080-900468

Human Machine Interface HMI

Description	PTF009 / 025 / 056 / 114
10.1"	PTA-010-1R1-13
15.5"	PTA-015-1R1-13




External braking resistor

Description	PTF009	PTF025	PTF056	PTF114
Resistor	internal	ACB-0001-01 (300Ω, 400W)		



Shield connection terminal block for I/O modules (PACIO-412-01 included as standard)

Description	PTF009 / 025 / 056 / 114
2 x 8 mm	PACIO-412-01
1 x 14 mm	PACIO-412-02

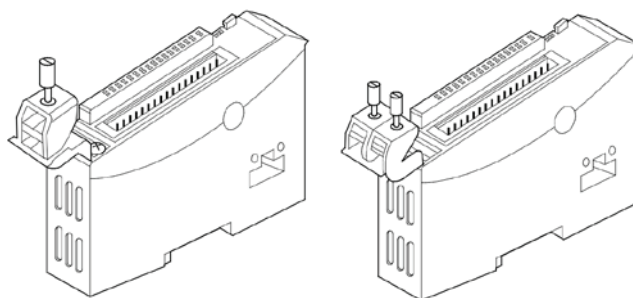

Order Code

	1	2	3	4	5	6	7	8	9	10	11	12
Order example	PTF	025	A	1	F	300	A	1	N	A	NNNNN	000

1	System name	
	PTF	Push-To-Fit
2	Maximal Thrust Force	
	009	9.3 kN
	025	25.1 kN
	056	56 kN
	114	114 kN
3	Motor mounting position, housing orientation and groove orientation	
	PTF025/056/114 features 2 grooves each on all 4 sides (e.g. Code B=A)	
	A	Inline + groove for initiator 3 & 9 o'clock (standard)
		
	B	Inline + groove for initiator 6 & 12 o'clock
		
4	Relubrication option ¹⁾	
	In combination with motor mounting position, housing orientation and groove orientation	
		PTF009
		A B all others
1	No additional lubrication hole (standard)	•
2	Relubricating hole in the profile 12 o'clock	• •
3	Relubricating hole in the profile 3 o'clock	• •
4	Relubricating hole in the profile 6 o'clock	• •
5	Relubricating hole in the profile 9 o'clock	• •
6	Preparation to connect to customer central lubrication	•
5	Mounting type	
	F	Thread on the cylinder body (PTF056, ETH114 does not have an additional mounting thread on the underside)
6	Stroke in mm	
	100	PTF009
	200, 300	PTF009 / 025 / 056 / 114
	400, 600	PTF025 / 056 / 114
7	Holding brake	
	A	Motor with holding brake
8	Force Sensor	
	1	Force sensor
	2	Force sensor with calibration sheet according to DIN EN 10204
9	Interface	
	N	Integrated web visualization and digital I/Os (standard)
	P	N + PROFINET
10	Functional Safety	
	A	Hardware STO (max. PLe, standard)
	B	Safety PLC (STO over FSoE, max. PLe), SLS (max. PLd), SBC/SBT (motor holding brake max. PLd)
	C	B + SBC/SBT with external safety brake (max. PLe)
11	Option	
	NNNNN	Standard
12	Customization	
	000	Non customized

¹⁾ Relubrication options 2-5: The standard lubrication port is without function. In case of actuators with very short strokes, the position of the lubrication port in the center of the profile may not be possible. For more information see mounting instructions.



Parker's Motion & Control Technologies

At Parker, we're guided by a relentless drive to help our customers become more productive and achieve higher levels of profitability by engineering the best systems for their requirements. It means looking at customer applications from many angles to find new ways to create value. Whatever the motion and control technology need, Parker has the experience, breadth of product and global reach to consistently deliver. No company knows more about motion and control technology than Parker. For further info call 00800 27 27 5374



Aerospace

Key Markets

Aftermarket services
Commercial transports
Engines
General & business aviation
Helicopters
Launch vehicles
Military aircraft
Missiles
Power generation
Regional transports
Unmanned aerial vehicles

Key Products

Control systems & actuation products
Engine systems & components
Fluid conveyance systems & components
Fluid metering, delivery & atomization devices
Fuel systems & components
Fuel tank inerting systems
Hydraulic systems & components
Thermal management
Wheels & brakes



Climate Control

Key Markets

Agriculture
Air conditioning
Construction Machinery
Food & beverage
Industrial machinery
Life sciences
Oil & gas
Precision cooling
Process
Refrigeration
Transportation

Key Products

Accumulators
Advanced actuators
CO₂ controls
Electronic controllers
Filter driers
Hand shut-off valves
Heat exchangers
Hose & fittings
Pressure regulating valves
Refrigerant distributors
Safety relief valves
Smart pumps
Solenoid valves
Thermostatic expansion valves



Electromechanical

Key Markets

Aerospace
Factory automation
Life science & medical
Machine tools
Packaging machinery
Paper machinery
Plastics machinery & converting
Primary metals
Semiconductor & electronics
Textile
Wire & cable

Key Products

AC/DC drives & systems
Electric actuators, gantry robots & slides
Electrohydraulic actuation systems
Electromechanical actuation systems
Human machine interface
Linear motors
Stepper motors, servo motors, drives & controls
Structural extrusions



Filtration

Key Markets

Aerospace
Food & beverage
Industrial plant & equipment
Life sciences
Marine
Mobile equipment
Oil & gas
Power generation & renewable energy
Process
Transportation
Water Purification

Key Products

Analytical gas generators
Compressed air filters & dryers
Engine air, coolant, fuel & oil filtration systems
Fluid condition monitoring systems
Hydraulic & lubrication filters
Hydrogen, nitrogen & zero air generators
Instrumentation filters
Membrane & fiber filters
Microfiltration
Sterile air filtration
Water desalination & purification filters & systems



Fluid & Gas Handling

Key Markets

Aerial lift
Agriculture
Bulk chemical handling
Construction machinery
Food & beverage
Fuel & gas delivery
Industrial machinery
Life sciences
Marine
Mining
Mobile
Oil & gas
Renewable energy
Transportation

Key Products

Check valves
Connectors for low pressure fluid conveyance
Deep sea umbilicals
Diagnostic equipment
Hose couplings
Industrial hose
Mooring systems & power cables
PTFE hose & tubing
Quick couplings
Rubber & thermoplastic hose
Tube fittings & adapters
Tubing & plastic fittings



Hydraulics

Key Markets

Aerial lift
Agriculture
Alternative energy
Construction machinery
Forestry
Industrial machinery
Machine tools
Marine
Material handling
Mining
Oil & gas
Power generation
Refuse vehicles
Renewable energy
Truck hydraulics
Turf equipment

Key Products

Accumulators
Cartridge valves
Electrohydraulic actuators
Human machine interfaces
Hybrid drives
Hydraulic cylinders
Hydraulic motors & pumps
Hydraulic systems
Hydraulic valves & controls
Hydrostatic steering
Integrated hydraulic circuits
Power take-offs
Power units
Rotary actuators
Sensors



Pneumatics

Key Markets

Aerospace
Conveyor & material handling
Factory automation
Life science & medical
Machine tools
Packaging machinery
Transportation & automotive

Key Products

Air preparation
Brass fittings & valves
Manifolds
Pneumatic accessories
Pneumatic actuators & grippers
Pneumatic valves & controls
Quick disconnects
Rotary actuators
Rubber & thermoplastic hose & couplings
Structural extrusions
Thermoplastic tubing & fittings
Vacuum generators, cups & sensors



Process Control

Key Markets

Alternative fuels
Biopharmaceuticals
Chemical & refining
Food & beverage
Marine & shipbuilding
Medical & dental
Microelectronics
Nuclear Power
Offshore oil exploration
Oil & gas
Pharmaceuticals
Power generation
Pulp & paper
Steel
Water/wastewater

Key Products

Analytical Instruments
Analytical sample conditioning products & systems
Chemical injection fittings & valves
Fluoropolymer chemical delivery fittings, valves & pumps
High purity gas delivery fittings, valves, regulators & digital flow controllers
Industrial mass flow meters/controllers
Permanent no-weld tube fittings
Precision industrial regulators & flow controllers
Process control double block & bleeds
Process control fittings, valves, regulators & manifold valves



Sealing & Shielding

Key Markets

Aerospace
Chemical processing
Consumer
Fluid power
General Industrial
Information technology
Life sciences
Microelectronics
Military
Oil & gas
Power generation
Renewable energy
Telecommunications
Transportation

Key Products

Dynamic seals
Elastomeric o-rings
Electro-medical instrument design & assembly
EMI shielding
Extruded & precision-cut, fabricated elastomeric seals
High temperature metal seals
Homogeneous & inserted elastomeric shapes
Medical device fabrication & assembly
Metal & plastic retained composite seals
Shielded optical windows
Silicone tubing & extrusions
Thermal management
Vibration dampening

Parker Worldwide

Europe, Middle East, Africa

AE – United Arab Emirates, Dubai
Tel: +971 4 8127100
parker.me@parker.com

AT – Austria, St. Florian
Tel: +43 (0)7224 66201
parker.austria@parker.com

AZ – Azerbaijan, Baku
Tel: +994 50 2233 458
parker.azerbaijan@parker.com

BE/NL/LU – Benelux, Hendrik Ido Ambacht
Tel: +31 (0)541 585 000
parker.nl@parker.com

BG – Bulgaria, Sofia
Tel: +359 2 980 1344
parker.bulgaria@parker.com

BY – Belarus, Minsk
Tel: +48 (0)22 573 24 00
parker.poland@parker.com

CH – Switzerland, Etoy
Tel: +41 (0)21 821 87 00
parker.switzerland@parker.com

CZ – Czech Republic, Klecany
Tel: +420 284 083 111
parker.czechrepublic@parker.com

DE – Germany, Kaarst
Tel: +49 (0)2131 4016 0
parker.germany@parker.com

DK – Denmark, Ballerup
Tel: +45 43 56 04 00
parker.denmark@parker.com

ES – Spain, Madrid
Tel: +34 902 330 001
parker.spain@parker.com

FI – Finland, Vantaa
Tel: +358 (0)20 753 2500
parker.finland@parker.com

FR – France, Contamine s/Arve
Tel: +33 (0)4 50 25 80 25
parker.france@parker.com

GR – Greece, Piraeus
Tel: +30 210 933 6450
parker.greece@parker.com

HU – Hungary, Budaörs
Tel: +36 23 885 470
parker.hungary@parker.com

IE – Ireland, Dublin
Tel: +353 (0)1 466 6370
parker.ireland@parker.com

IL – Israel
Tel: +39 02 45 19 21
parker.israel@parker.com

IT – Italy, Corsico (MI)
Tel: +39 02 45 19 21
parker.italy@parker.com

KZ – Kazakhstan, Almaty
Tel: +7 7273 561 000
parker.easteurope@parker.com

NO – Norway, Asker
Tel: +47 66 75 34 00
parker.norway@parker.com

PL – Poland, Warsaw
Tel: +48 (0)22 573 24 00
parker.poland@parker.com

PT – Portugal
Tel: +351 22 999 7360
parker.portugal@parker.com

RO – Romania, Bucharest
Tel: +40 21 252 1382
parker.romania@parker.com

RU – Russia, Moscow
Tel: +7 495 645-2156
parker.russia@parker.com

SE – Sweden, Borås
Tel: +46 (0)8 59 79 50 00
parker.sweden@parker.com

SK – Slovakia, Banská Bystrica
Tel: +421 484 162 252
parker.slovakia@parker.com

SL – Slovenia, Novo Mesto
Tel: +386 7 337 6650
parker.slovenia@parker.com

TR – Turkey, Istanbul
Tel: +90 216 4997081
parker.turkey@parker.com

UA – Ukraine, Kiev
Tel: +48 (0)22 573 24 00
parker.poland@parker.com

UK – United Kingdom, Warwick
Tel: +44 (0)1926 317 878
parker.uk@parker.com

ZA – South Africa, Kempton Park
Tel: +27 (0)11 961 0700
parker.southafrica@parker.com

North America

CA – Canada, Milton, Ontario
Tel: +1 905 693 3000

US – USA, Cleveland
Tel: +1 216 896 3000

Asia Pacific

AU – Australia, Castle Hill
Tel: +61 (0)2-9634 7777

CN – China, Shanghai
Tel: +86 21 2899 5000

HK – Hong Kong
Tel: +852 2428 8008

IN – India, Mumbai
Tel: +91 22 6513 7081-85

JP – Japan, Tokyo
Tel: +81 (0)3 6408 3901

KR – South Korea, Seoul
Tel: +82 2 559 0400

MY – Malaysia, Shah Alam
Tel: +60 3 7849 0800

NZ – New Zealand, Mt Wellington
Tel: +64 9 574 1744

SG – Singapore
Tel: +65 6887 6300

TH – Thailand, Bangkok
Tel: +662 186 7000

TW – Taiwan, Taipei
Tel: +886 2 2298 8987

South America

AR – Argentina, Buenos Aires
Tel: +54 3327 44 4129

BR – Brazil, Sao Jose dos Campos
Tel: +55 800 727 5374

CL – Chile, Santiago
Tel: +56 2 623 1216

MX – Mexico, Toluca
Tel: +52 72 2275 4200

EMEA Product Information Centre

Free phone: 00 800 27 27 5374

(from AT, BE, CH, CZ, DE, DK, EE, ES, FI, FR, IE, IL, IS, IT, LU, MT, NL, NO, PL, PT, RU, SE, SK, UK, ZA)

US Product Information Centre

Toll-free number: 1-800-27 27 537

www.parker.com

Your local authorized Parker distributor

