



aerospace  
climate control  
**electromechanical**  
filtration  
fluid & gas handling  
hydraulics  
pneumatics  
process control  
sealing & shielding



# DC590+ Series

DC Drives - Integrator Series



**ENGINEERING YOUR SUCCESS**



**WARNING – USER RESPONSIBILITY**

**FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.**

- This document and other information from Parker-Hannifin Corporation, its subsidiaries and authorized distributors provide product or system options for further investigation by users having technical expertise.
- The user, through its own analysis and testing, is solely responsible for making the final selection of the system and components and assuring that all performance, endurance, maintenance, safety and warning requirements of the application are met. The user must analyze all aspects of the application, follow applicable industry standards, and follow the information concerning the product in the current product catalog and in any other materials provided from Parker or its subsidiaries or authorized distributors.
- To the extent that Parker or its subsidiaries or authorized distributors provide component or system options based upon data or specifications provided by the user, the user is responsible for determining that such data and specifications are suitable and sufficient for all applications and reasonably foreseeable uses of the components or systems.

**DC Drives - DC590+ Integrator Series 15 A - 1950 A**

**Overview**..... 5

**Technical characteristics** ..... 8

    Technical Data..... 9

**Dimensions** ..... 10

    Overview of Frames 1 and 2..... 11

    Overview of Frame 3 ..... 12

**External Stack Controller - DC598+, DC599+ Series** ..... 15

**Accessories and Options** ..... 16

    Overview..... 16

    Communication Cards ..... 17

    Encoder Feedback Option Card ..... 18

    Analogue Tacho Feedback Option Card ..... 18

    Operator Keypads ..... 19

    Drive System Explorer Lite (DSE Lite) Software ..... 20

**Order Codes** ..... 21

    DC590+ Integrator Series, 110 V...500 V 3 phase..... 21

    DC590+ Integrator Series 500 V...690 V 3 phase..... 22

    DC590+ Series External Stack Controllers..... 23

# Parker Hannifin

## The global leader in motion and control technologies

### A world class player on a local stage

#### Global Product Design

Parker Hannifin has more than 40 years experience in the design and manufacturing of drives, controls, motors and mechanical products. With dedicated global product development teams, Parker draws on industry-leading technological leadership and experience from engineering teams in Europe, North America and Asia.

#### Local Application Expertise

Parker has local engineering resources committed to adapting and applying our current products and technologies to best fit our customers' needs.

#### Manufacturing to Meet Our Customers' Needs

Parker is committed to meeting the increasing service demands that our customers require to succeed in the global industrial market. Parker's manufacturing teams seek continuous improvement through the implementation of lean manufacturing methods throughout the process. We measure ourselves on meeting our customers' expectations of quality and delivery, not just our own. In order to meet these expectations, Parker operates and continues to invest in our manufacturing facilities in Europe, North America and Asia.

#### Electromechanical Worldwide Manufacturing Locations

##### Europe

Littlehampton, United Kingdom  
Dijon, France  
Offenburg, Germany  
Filderstadt, Germany  
Milan, Italy

##### Asia

Wuxi, China  
Jangan, Korea  
Chennai, India

##### North America

Rohnert Park, California  
Irwin, Pennsylvania  
Charlotte, North Carolina  
New Ulm, Minnesota



Offenburg, Germany

#### Local Manufacturing and Support in Europe

Parker provides sales assistance and local technical support through a network of dedicated sales teams and authorized technical distributors throughout Europe.

For contact information, please refer to the Sales Offices on the back cover of this document or visit [www.parker.com](http://www.parker.com)



Milan, Italy



Littlehampton, UK



Filderstadt, Germany



Dijon, France

# DC Drives - DC590+ Integrator Series 15 A - 1950 A

## Overview

### Description

The DC590+ Integrator Series DC drive is the latest development of the range which also includes the AC690+ AC drives. It benefits from 30 years experience of designing and manufacturing drives for process line control with dedicated function blocks which simplify the implementation of applications such as sectional drive reels, winder control etc. The function block capabilities offer unparalleled flexibility in both new installations and retrofit applications. A number of common fieldbus communications options enable connectivity to a wide range of popular control networks allowing the DC590+ to be integrated in larger control systems.

### Features

- Ratings up to 1950 A and supply voltages to 690 V
- Internal controlled field supply  
Function blocks programming, including open and closed-loop winder control as standard

### Standards

The DC590+ series meets the following standards when installed in accordance with the relevant product manual.

CE marked to EN50178 (Safety, Low Voltage Directive)  
EN61800-3 (EMC Directive) with integral filters.  
External supply capacitors are required up to 110 A for compliance.

- Supply Voltage 220...500 V as standard
- CE marked
- UL and cUL approved up to 830 A



### Technical Characteristics - Overview

<b>Power configuration</b>	DC590+ 4 quadrant regenerative; 2 fully controlled 3 phase thyristor bridges DC591+ 2 quadrant; 1 fully controlled 3 phase thyristor bridge
<b>Armature rating (ADC)</b>	Frame 1 15, 35 A Frame 2 40, 70, 110, 165 A Frame 3 180, 270 A Frame 4 380, 500, 725, 830 A Frame 6 1250, 1600, 1950 A
<b>Overload</b>	15...270 A; 200 % for 10 s 150 % for 30 s - from 380 A: several overload choices are available
<b>Supply voltage (VAC) 50/60 Hz</b>	220...500 V ( $\pm 10\%$ ) Frame 1...4 110...220 V ( $\pm 10\%$ ) Option Frame 1...4 500...600 V ( $\pm 10\%$ ) Option Frame 4 380...600 V ( $\pm 10\%$ ) Frame 6 380...690 V ( $\pm 10\%$ ) Frame 6
<b>Field current max</b>	4 A Frame 1 10 A Frame 2 and 3 30 A Frame 4
<b>Field voltage max</b>	$V_{field} = V_{AC} \times 0.82$
<b>Operating Environment</b>	
<b>Operating temperature</b>	0...45 °C (15...165 A) 0...35 °C (180...270 A) 0...40 °C (current $\geq 1200$ A) derate by 1 %/°C up to 55 °C max
<b>Altitude</b>	500 m above sea level Derate by 1 %/200 m above 500 m to 5000 m max



### Next Generation Technology

Building upon the highly successful DC590+ drive used in thousands of applications world-wide, the DC590+ Integrator drive takes DC motor control to the next level. With its state-of-the-art advanced 32-bit control architecture, the DC590+ drive delivers highly functional and flexible control suited to a whole host of industrial applications.

### Typical Applications

- **Converting machinery**
- **Plastics and rubber processing machinery**
- **Wire and cable**
- **Material handling systems**
- **Automotive**

### Function Block Programming

Function Block Programming is a tremendously flexible control structure that allows an almost infinite combination of user functions to be realised with ease. Each control function (an input, output, process PID for example) is represented as a software block that can be freely interconnected to all other blocks to provide any desired action.

The drive is despatched with the function blocks pre-configured as a standard DC drive so you can operate it straight from the box without further adjustments. Alternatively you can pick pre-defined Macros or even create your own control strategy, often alleviating the need for an external PLC and therefore reducing cost.

### Feedback Options

The DC590+ has a range of interface options which are compatible with the most common feedback devices enabling simple motor control through to the most sophisticated multi-motor system. Armature voltage feedback is standard without the need for any interface option.

- **Analogue tachogenerator**
- **Encoder**

### Interface Options

Designed with connectivity in mind, the DC590+ has a number of communications and I/O options that allow the drive to take control of the application, or be integrated into a larger system. When combined with function programming, custom functions and control can be easily created offering the user a highly flexible and versatile platform for DC motor control.

### Programming/ Operator Controls

Featuring an intuitive menu structure, the ergonomically designed operator panel allows quick and easy access to all parameters and functions of the drive via a bright, easy to read backlit display and tactile keypad. Additionally, it provides local control of start/stop, speed demand and rotation direction to greatly assist with machine commissioning.

- **Multi-Lingual alpha-numeric display**
- **Customised parameter values and legends**
- **On drive or remote mounting**
- **Local control of start/stop, speed and direction**
- **Quick set-up menu**

### Connectivity

Whatever the complexity of your control scheme, the DC590+ has the interface to suit. As standard there's enough analogue and digital I/O for the most complex applications. Alternatively, add the relevant "technology box" for immediate access to serial communications and Fieldbus networks. The DC590+ has been designed to fit seamlessly, and without compromise, into any control environment.

### Analogue/Digital Control

- 5 Analogue Inputs (12bit + sign)
- 3 Analogue Outputs
- 9 Digital Inputs
- 3 Digital Outputs

### Serial Communications and Fieldbus Options

- PROFIBUS
- CANopen
- Devicenet
- RS422 / RS485
- Ei Bisynch
- EtherNet



6901 Programming/ Operator Controls

## Features and Benefits

### Easy to use operator controls

- Detailed diagnostics
- Multi-language display

### Advanced autotuning

### Standard open fieldbuses



### Configurable input-output terminal blocks

- 5 analogue inputs
- 3 analogue outputs
- 9 digital inputs
- 3 digital outputs



### Macro function blocks

- Open-loop winder control
- Winder control - loadcell/dancer
- Section control
- Maths functions
- Embedded controller functions

### Worldwide product support

The DC590+ DC Drive is available with full application and service support in over fifty countries worldwide. So wherever you are, you can be confident of full back up and support.



### Rapid Commissioning, optimal control performance and easy maintenance

With its self-tuning algorithm, the DC590+ can be configured and commissioned within minutes, without turning the motor and without the need for high levels of engineering know-how. The operator interface allows easy monitoring of machine operation and simplifies maintenance.

### Easy integration into existing control networks


The DC590+ has a wide choice of common industry fieldbus communication options allowing seamless integration into existing factory control networks.

### Interfacing with existing external control equipment (Dancer, gauge, etc...)

A number of input / output options gives the DC590+ the flexibility needed for integration into any variable speed system. Combined with its embedded automation functions, its input-output configurations can in many instances remove the need for an external PLC.

### Years of applications expertise at your service

The DC590+ macro function blocks are the result of over 30 years of experience gained by Parker SSD of installing drives in variable speed and sectional drive systems. This unique application experience is included in the drive in the form of dedicated function blocks at no extra cost, thereby reducing the design costs of your machinery.

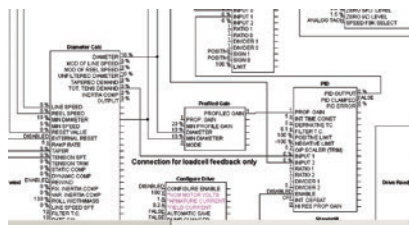

## Technical characteristics

### Electrical characteristics

Voltage	Output current [A]		Field current max [A]	Frame	Order code <sup>1</sup>
	Continuous 100 %	Overload 150 % x 30 s 200 % x 10 s			
	without overload				
110 V - 220 V	15	15	4	1	590P-2321501...
	35	35	4	1	590P-2323501...
	40	40	10	2	590P-2324002...
	70	70	10	2	590P-2327002...
	110	110	10	2	590P-2331102...
	165	165	10	2	590P-2331652...
	180	180	10	3	590P-2331803...
	270	270	10	3	590P-2332703...
	420	380	30	4	590P-2333804...
	550	500	30	4	590P-2335004...
	800	725	30	4	590P-2337254...
220 V - 500 V	910	830	30	4	590P-2338304...
	15	15	4	1	590P-5321501...
	35	35	4	1	590P-5323501...
	40	40	10	2	590P-5324002...
	70	70	10	2	590P-5327002...
	110	110	10	2	590P-5331102...
	165	165	10	2	590P-5331652...
	180	180	10	3	590P-5331803...
	270	270	10	3	590P-5332703...
	420	380	30	4	590P-5333804...
	550	500	30	4	590P-5335004...
	800	725	30	4	590P-5337254...
	910	830	30	4	590P-5338304...
	1350	1250	60	6	590P-5341256...
1750	1600	60	6	590P-5341606...	
2150	1950	60	6	590P-5341956...	
500 V - 600 V	420	380	30	4	590P-6333804...
	550	500	30	4	590P-6335004...
	800	725	30	4	590P-6337254...
	910	830	30	4	590P-6338304...
500 V - 690 V	1350	1250	60	6	590P-7341256...
	1750	1600	60	6	590P-7341606...
	1950	1850	60	6	590P-7341956...


<sup>(1)</sup> The references are for 4Q drives  
 For 2Q drives, replace "590P" for "591P"




## Technical Data

<b>Protection</b>	High energy MOV's Heatsink overtemperature Instantaneous overcurrent Thyristor trigger failure Inverse time overcurrent Interline snubber network Field Failure Zero speed detection Speed feedback failure Stall protection Motor overtemperature
<b>Inputs/Outputs</b>	
<b>Analogue inputs</b>	(5 Total - 1 x 12 bit plus sign, 4 x 10 bit plus sign) 1 - Speed demand setpoint (-10/0/+10 V) 4 - Configurable
<b>Analogue outputs</b>	(3 Total - 10 bit) 1 - Armature current output (-10/0/+10 V or 0-10 V) 2 - Configurable
<b>Digital inputs</b>	(9 Total - 24 V, max 15 mA) 1 - Program stop 1 - Coast stop 1 - External stop 1 - Start/Run 5 - Configurable
<b>Digital outputs</b>	(3 Total - 24 V (max 30 V) 100 mA) 3 - Configurable
<b>Reference supplies</b>	1 - +10 VDC 1 - -10 VDC 1 - +24 VDC


## Dimensions




**Frame 1/2**



**Frame 3**



**Frame 4**




**Frame 6**

Current [A]	Frame	Dimensions [mm]			Weight [kg]
		W	H	D	
15/35	1	200	375	220	6.4
40/165	2	200	434	292	10.5
180/270	3	250	485	234	20
380/500	4	253	700	358	32
725/830					44
1250/1950	6 2Q	686	715	378	95
	6 4Q				110

## Overview of Frames 1 and 2

### Frames 1 and 2

1	Main drive assembly
2	Terminal cover
3	Terminal cover retaining screws
5	6901 keypad
6	COMMS technology box (optional)
7	Speed feedback technology card (optional)
8	Gland plate
9	Power terminal shield
10	Power terminals
11	Control terminals
12	Earthing points
13	Keypad port
14	RS232 programming port
15	Auxiliary power, external contactor and isolated thermistor terminals

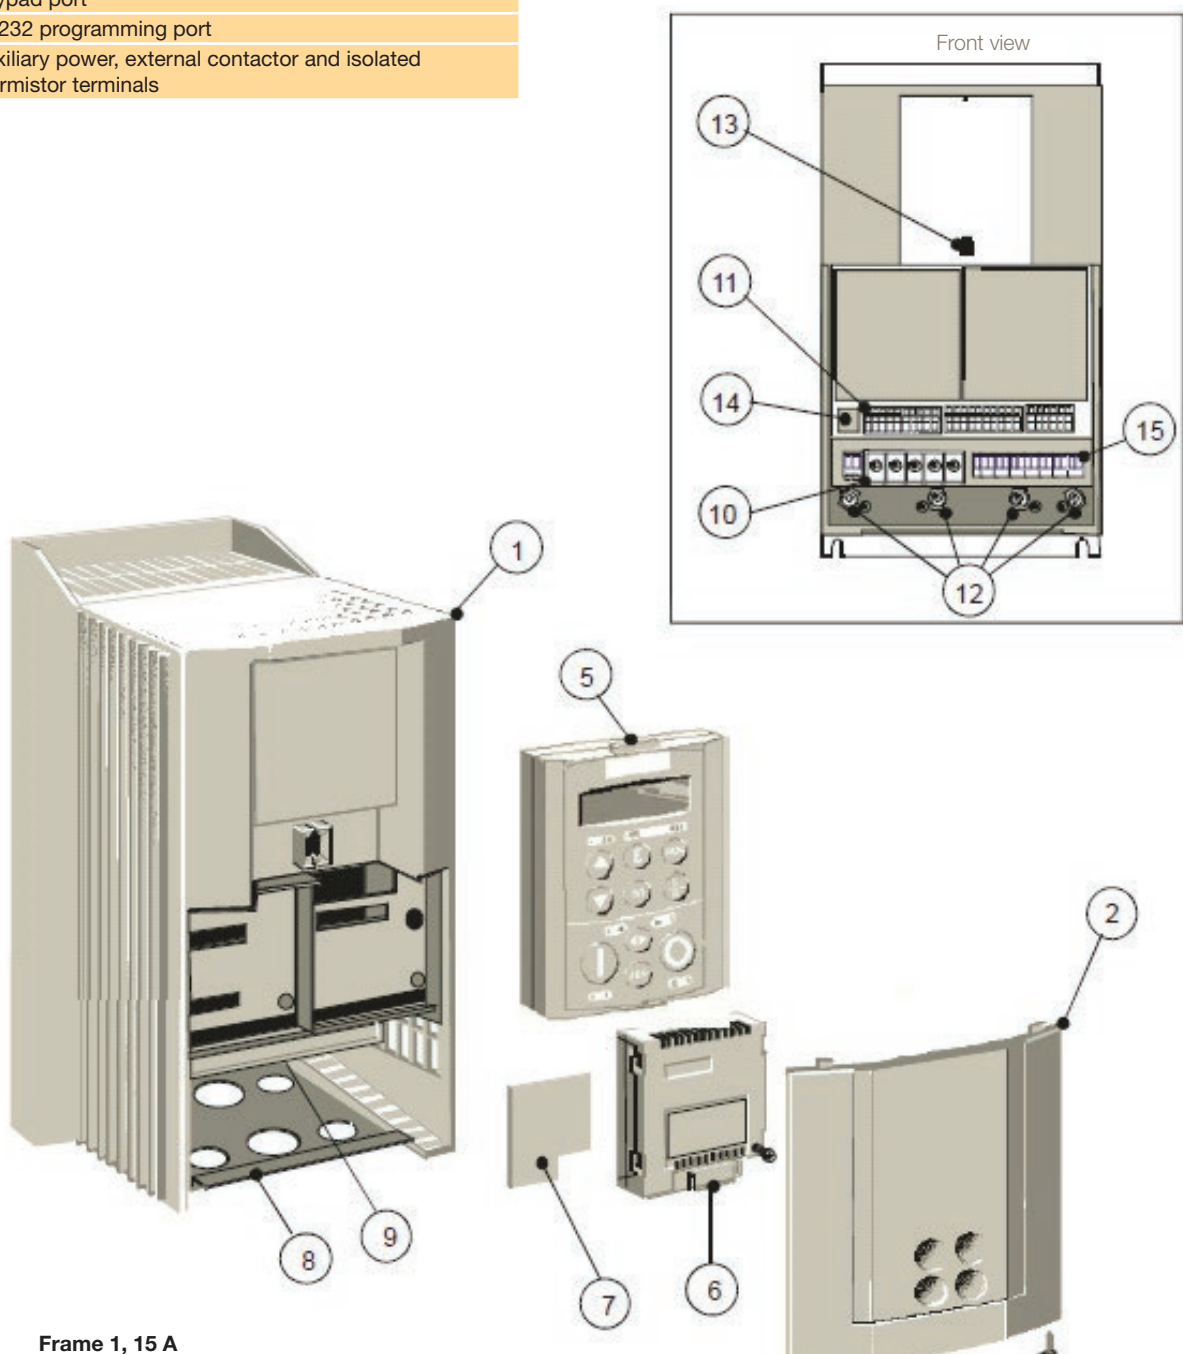


Frame 1, 15 A

### Overview of Frame 3

1	Main drive assembly
2	Door assembly
3	Field wiring terminals
4	Busbars - main power input
5	Busbars - main power output
6	IP20 Top cover
7	IP20 Fan housing (where fitted)


Front view

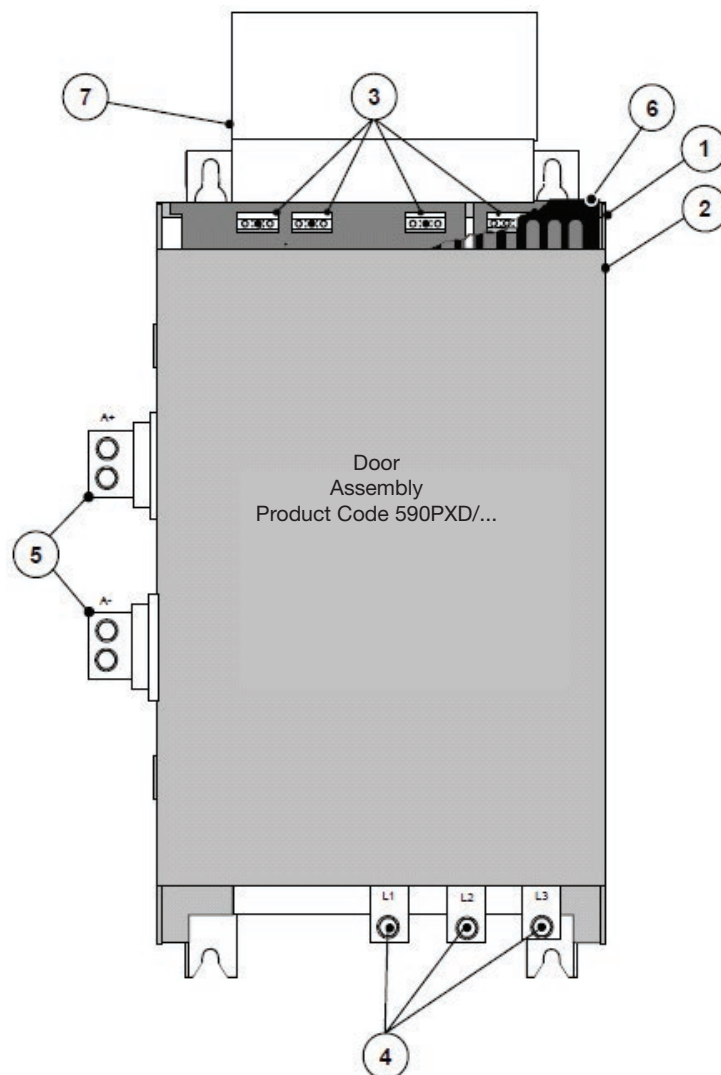

270 A Unit

### Overview of Frame 4


1	Main drive assembly
2	Standard door assembly
3	Motor field terminals
4	Busbars - main power input
5	Busbars - main power output
6	Auxiliary supply, contactor and motor thermistor terminals
7	External vent (where fitted)
8	Contactor control select

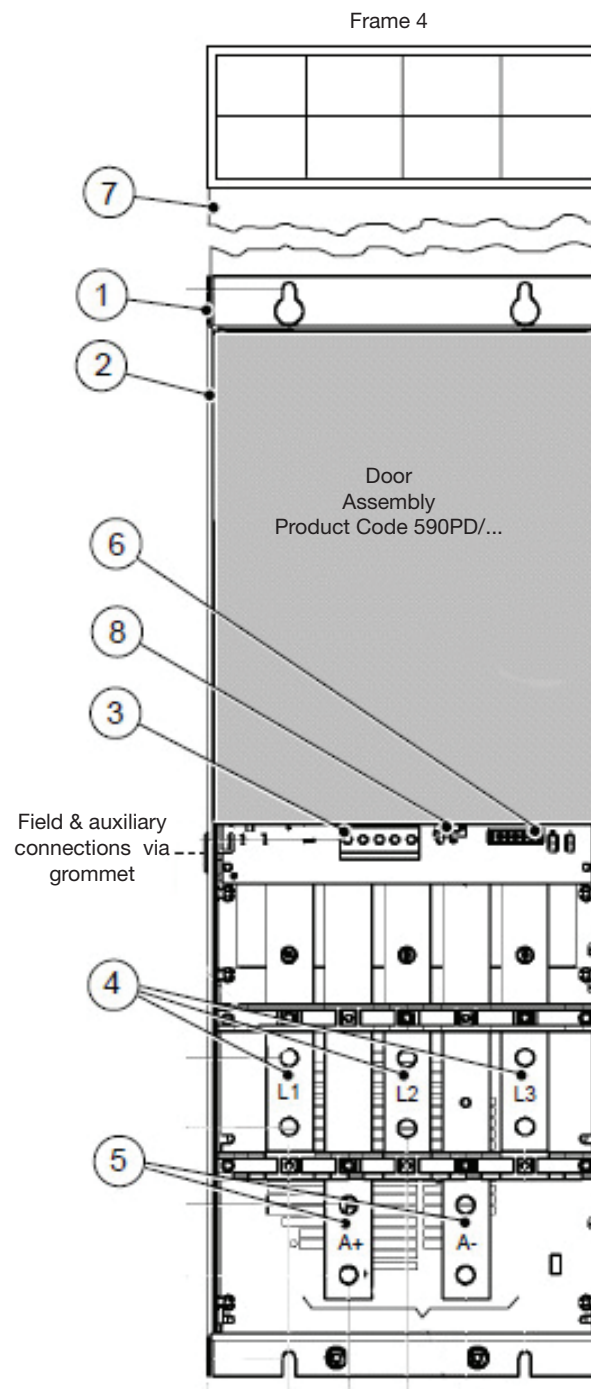



### Overview of Frame 6

1	Phase assemblies - L1, L2, L3
2	Fishplate
3	Control panel assembly
4	Front cover
5	Standard door assembly
6	Field controller
7	Busbars - main power input
8	Busbars - main power output

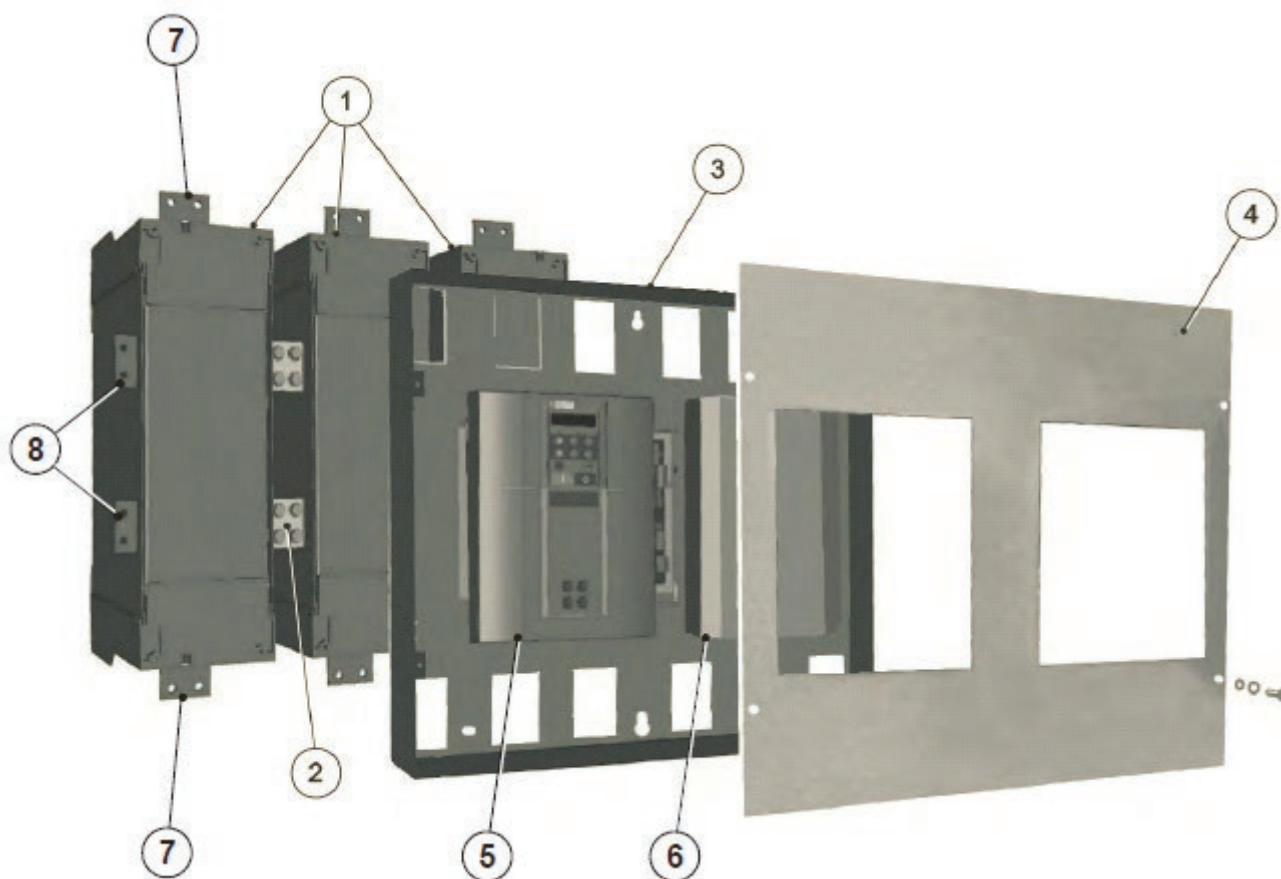

## External Stack Controller - DC598+, DC599+ Series

### The economical solution for retrofit applications

When upgrading machines equipped with older high power DC drives, the most cost-effective and quickest way is often to reuse the existing thyristor power stack, which in most cases will be in perfect working order. To preserve your investment, Parker SSD Drives has developed a DC598+ / DC599+ power stack controller offer specially aimed at retrofit applications and based on the DC590+ controller.

Available in 2 versions, the DC599+ two quadrant non-regenerative and DC598+ four quadrant full-regenerative versions, can be used to drive the power stacks of existing DC drives manufactured by Parker SSD or other manufacturers, delivering the benefits of the recent technological innovations of the DC590+ Series drive.

The DC598+ and DC599+ offer the ability to upgrade your equipment quickly and easily and integrates with your existing control equipment or SCADA package. The DC598+ and DC599+ retrofit solutions are recommended for currents above 800 A.

### Benefits

- Reuse existing DC power stacks
- Connectivity over standard common fieldbuses (Including PROFIBUS, EtherNet, DeviceNet, CANopen)
- Easy to use operator interface
- Flexible common Integrator Series programming environment

### The DC598/9+ provides the following:

- Thyristor firing signals
- Thyristor firing pulse transformers
- AC current transformer feedback rectification and scaling
- Armature voltage feedback interface
- Coding and phase rotation interface
- Mains present monitoring
- Heatsink over-temperature input
- Field power modules and input/output terminals
- Field current monitoring and scaling
- All standard DC590+ I/O terminals



### Technical Characteristics

<b>Supply Voltage</b>	110...240 VAC ±10 % 220...500 VAC ±10 % 380...690 VAC ±10 % 3 ph coding or 1 ph power
<b>Supply Frequency</b>	50/60 Hz ±10 %
<b>Output Field Current</b>	60 ADC naturally cooled - 120 ADC force cooled (1 x Field Current DC value) Amps 1 ph. AC Nominal 3 ph AC
<b>Field Output Voltage</b>	(0.9 x 1 ph Supply Voltage) VDC
<b>Total Losses</b>	(3 x idc out) Watts.
<b>Auxiliary Supply</b>	110...240 VAC ±10 % 1 ph - Naturally cooled 110...120 VAC ±10 % 1 ph - Force cooled 115 V fan 220...240 VAC ±10 % 1ph - Force cooled 230 V fan
<b>Auxiliary Supply Current</b>	SMPS Quiescent Current = 500 mA 115 VAC or 250 mA 230 VAC ie 50 VA. Fan current - 270 mA @115 VAC or 135 mA @230 VAC
<b>Auxiliary Supply Fuse</b>	3 A
<b>Operating Temp.</b>	0...+45 °C
<b>Storage Temp.</b>	-25...+55 °C
<b>Shipping Temp.</b>	-25...+70 °C
<b>Enclosure Rating</b>	IP20
<b>Altitude Rating</b>	Maximum Altitude 500 m De-rate the output at 1 % per 200 m
<b>Humidity</b>	Maximum 85 % relative humidity at 45 % non-condensing
<b>Atmosphere</b>	Non flammable, non-corrosive and dust free
<b>Climatic</b>	Class 3k3 as defined by EN60721-3-3 (1995)

## Accessories and Options

### Overview

Options	Fitting	Order Reference
<b>Operator Keypad</b>		
DC590+ keypad (removable)	Option	6901-00-G
Remote mounting kit		6052/00
<b>Communication Cards</b>		
EtherNet Modbus/TCP and EtherNet IP	Option	6055-ENET-00
LINKnet		6055-LNET-00
DeviceNet		6055-DNET-00
RS485 / Modbus		6055-EI00-00
PROFIBUS-DP		6055-PROF-00
CANopen DS402		6055-CAN-00
<b>Speed Feedback Cards</b>		
Wire-ended encoder Card	Option	AH387775U001-1
Analogue Tacho		AH500935U001-1
<b>Drive Doors / Accessories</b>		
Door for Frame 3	Standard	590PXD-0010-UK
Door for Frame 4		590PD-0010-UK
Frame 4 ventilation kit	Option	LA466717U001-1

## Communication Cards

The communication cards allow the DC590+ to be connected to the most common industry standard fieldbuses.

## Features

- Dimensions HxWxD:  
127 mmx76.2 mmx25.4 mm
- LED indication of network and card status

Ethernet Communications Interface	
<b>*Order Code: 6055-ENET-00</b>	
<b>Supported Protocols</b>	Modbus/TCP and Ethernet IP
<b>Communication Speed</b>	10/100 M bits/s
<b>Station Address</b>	Selectable via switch or Internet Explorer
<b>Suitable for</b>	AC690+ version 4.7+ DC590+ version 7.1+

RS485/Modbus Communications Interface	
<b>*Order Code: 6055-EI00-00</b>	
<b>Supported Protocols</b>	Modbus RTU, EI Bisynch ASCII
<b>Cabling</b>	RS485 2 or 4 wire
<b>Communication Speed</b>	300 to 115200 bits/s
<b>Station Address</b>	Selectable via Software
<b>Suitable for</b>	AC690+ version 4.7+ DC590+ version 5.17+

Devicenet Communications Interface	
<b>*Order Code: 6055-DNET-00</b>	
<b>Supported Protocols</b>	DeviceNet Drive Profile Drive – Group 2 slave only
<b>Station Address</b>	DeviceNet Drive Profile Drive – Group 2 slave only
<b>Suitable for Drives</b>	AC690+ DC590+ version 5.x+

Profibus-DP Communications Interface	
<b>*Order Code: 6055-PROF-00</b>	
<b>Supported Protocols</b>	Profibus-DP
<b>Communication Speed</b>	Automatically Detected
<b>Station Address</b>	Selectable via Software
<b>Suitable for</b>	AC690+ version 1.x+ DC590+ version 5.x+

CANopen Communications Interface	
<b>*Order Code: 6055-CAN-00</b>	
<b>Profile</b>	DS402
<b>Supported Messages</b>	SDO, PDO, NMT, SYNC
<b>Communication Speed</b>	20 K, 50 K, 125 K, 250 K, 500 K, 1M bits/s selectable
<b>Station Address</b>	Selectable via Switch
<b>Suitable for</b>	AC690+ DC590+ version 5.x+

LINKnet Communications Interface	
<b>*Order Code: 6055-LNET-00</b>	
<b>Supported Protocols</b>	Modbus/TCP and Ethernet IP
<b>Communication Speed</b>	10/100 M bits/s
<b>Station Address</b>	Selectable
<b>Suitable for</b>	AC690+ DC590+ version 5.x+


## Encoder Feedback Option Card

### Description

The encoder feedback card allows an incremental encoder to be fitted to the drive to provide accurate measurement of motor speed. The card also provides the encoder power supply.

### Specifications

<b>Maximum input frequency</b>	100 kHz
<b>Receiver current consumption</b>	10 mA per channel
<b>Input format</b>	2 channel differential and quadrature
<b>Differential input voltage</b>	Minimum 3.5 V
<b>Encoder output voltage</b>	+5 V to 24 V adjustable (AH387774U001-1)
<b>Power supply rating</b>	2 W maximum
<b>Power supply load</b>	1.4 x output power
<b>Terminal size</b>	16 AWG maximum
<b>Tightening torque</b>	0.4 Nm

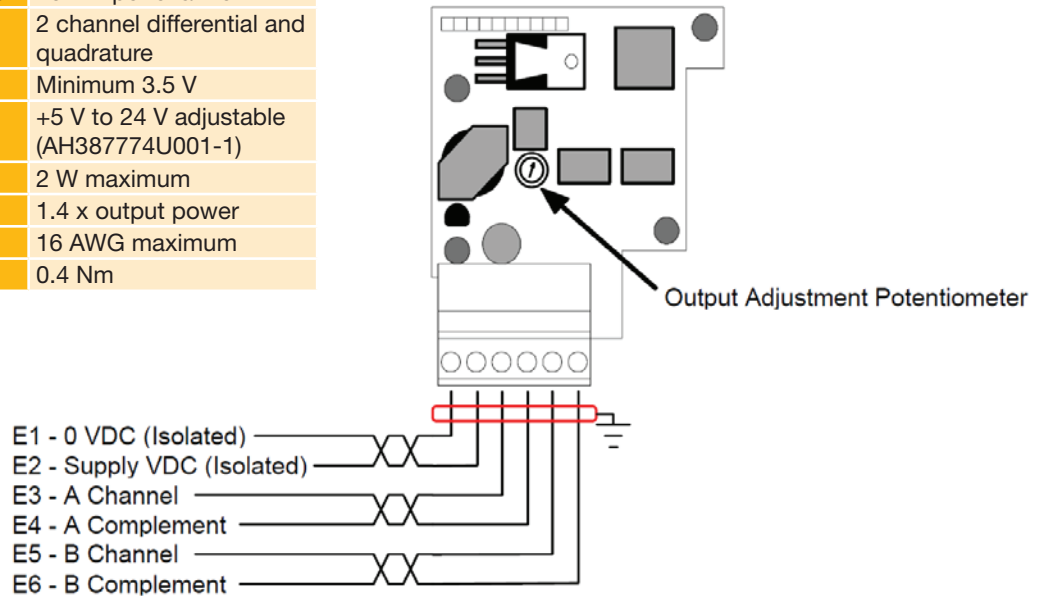


## Analogue Tacho Feedback Option Card

### Description

The analogue tacho feedback card allows the connection of either an AC or DC tachogenerator to provide a measurement of motor speed to improve motor control. Switches for calibration allow for quick and easy setup.

### Specifications

<b>Tachogenerator type</b>	AC/DC
<b>Calibration range</b>	10-200V

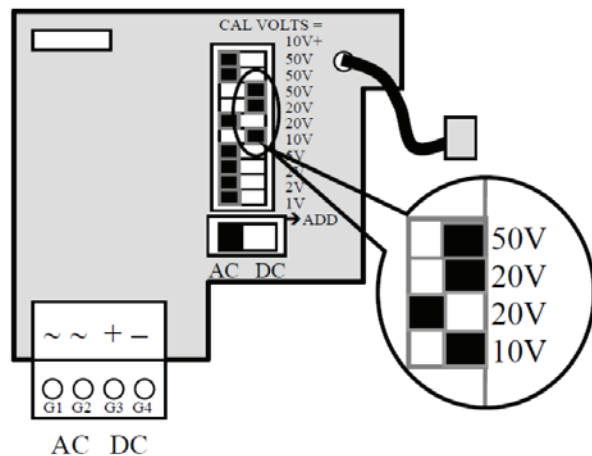

### Order Codes

Order Code	Description
AH387775U001-1	Encoder Card - Adjustable supply
AH500935U001-1	Tacho Feedback Card




## Operator Keypads

### Standard operator keypad 6901-00-G

#### Features

- Local motor control: start, speed, direction, diagnostics
- Operator menus and parameter configuration
- Quick setup menu
- Password protection for parameter configuration

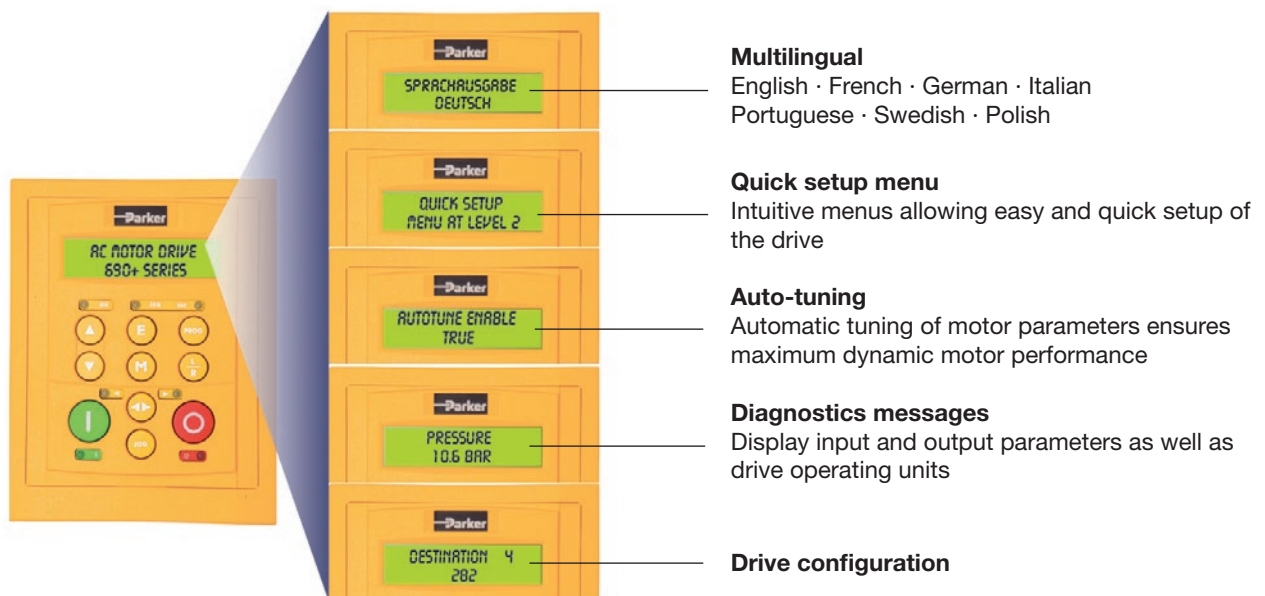



# Order Codes

## DC590+ Integrator Series, 110 V...500 V 3 phase

	1		2	3	4		5	6		7	8	9	10
Order example	590P	-	23	21501	0	-	P	00	-	U	4	V	0

### 1 Product Family

<b>590P</b>	DC590+ Series DC Digital Drive - 4 quadrant regenerative
<b>591P</b>	DC591+ Series DC Digital Drive - 2 quadrant non-regenerative

### 2 Supply Voltage

<b>23</b>	110...220 V 3 phase
<b>53</b>	220...500 V 3 phase

### 3 Current / Power Rating @110...220 VAC 3 ph

	Output current [A]	Frame
<b>21501</b>	15	1
<b>23501</b>	35	1
<b>24002</b>	40	2
<b>27002</b>	70	2
<b>31102</b>	110	2
<b>31652</b>	165	2
<b>31803</b>	180	3
<b>32703</b>	270	3
<b>33804</b>	380	4
<b>35004</b>	500	4
<b>37254</b>	725	4
<b>38304</b>	830	4

### 3 Current / Power Rating @220...500 VAC 3 ph

	Output current [A]	Frame
<b>21501</b>	15	1
<b>23501</b>	35	1
<b>24002</b>	40	2
<b>27002</b>	70	2
<b>31102</b>	110	2
<b>31652</b>	165	2
<b>31803</b>	180	3
<b>32703</b>	270	3
<b>33804</b>	380	4
<b>35004</b>	500	4
<b>37254</b>	725	4
<b>38304</b>	830	4
<b>41256</b>	1250	6
<b>41606</b>	1600	6
<b>41956</b>	1950	6

### 4 Auxiliary Supply

<b>0</b>	Universal 115 V...230 V 1 ph (Frames 1, 2, 6)
<b>1</b>	115 V 1 ph (Frames 3,4)
<b>2</b>	230 V 1 ph (Frames 3,4)

### 5 Mounting

<b>P</b>	Panel mounting (1)
----------	--------------------

### 6 Special Options

<b>00</b>	None
	Documented special options (refer to local sales office)

### 7 Languages

<b>U</b>	English (50/60 Hz) (2)
----------	------------------------

### 8 Keypad

<b>4</b>	6901 keypad fitted
----------	--------------------

### 9 Speed Feedback

<b>V</b>	Armature voltage (3)
----------	----------------------

### 10 Communications

<b>0</b>	None (4)
----------	----------

(1) Frame 4 ventilation duct kit sold as separate part LA466717U001-1.

(2) Product sold with English as standard. Additional languages can be selected by the user on the 6901 keypad at product commissioning. German, French, Italian and Spanish.

(3) Product supplied without feedback option fitted (armature voltage control). Encoder and tachometer feedback options sold separately.

(4) Product supplied without communications options fitted. Options sold separately.

## DC590+ Integrator Series 500 V...690 V 3 phase

	1		2	3	4		5	6		7	8	9	10
Order example	<b>590P</b>	-	<b>63</b>	<b>33804</b>	<b>2</b>	-	<b>P</b>	<b>00</b>	-	<b>U</b>	<b>4</b>	<b>V</b>	<b>0</b>

### 1 Product Family

<b>590P</b>	DC590+ Series DC Digital Drive - 4 quadrant regenerative
<b>591P</b>	DC591+ Series DC Digital Drive - 2 quadrant non-regenerative

### 2 Supply voltage

<b>63</b>	500...600 V 3 ph
<b>73</b>	500...690 V 3 ph

### 3 Current / Power Rating @500-600 V 3 ph

	Output current [A]	Frame
<b>33804</b>	380	4
<b>35004</b>	500	4
<b>37254</b>	725	4
<b>38304</b>	830	4

### 3 Current / Power Rating @500-690 V 3 ph

	Output current [A]	Frame
<b>41256</b>	1250	6
<b>41606</b>	1600	6
<b>41956</b>	1950	6

### 4 Auxiliary Supply

<b>0</b>	Universal 115 V...230 V 1ph (Frames 1, 2, 6)
<b>1</b>	115 V 1 ph (Frames 3...4)
<b>2</b>	230 V 1 ph (Frames 3...4)

### 5 Mounting

<b>P</b>	Panel mounting (1)
----------	--------------------

### 6 Special Options

<b>00</b>	None
	Documented special options (01...99) (refer to local sales office)

### 7 Languages

<b>U</b>	English (50/60 Hz) (2)
----------	------------------------

### 8 Keypad

<b>4</b>	6901 keypad fitted
----------	--------------------

### 9 Speed Feedback

<b>V</b>	Armature voltage (3)
----------	----------------------

### 10 Communications

<b>0</b>	None (4)
----------	----------

(1) Frame 4 ventilation duct kit sold as separate part LA466717U001-1.

(2) Product sold with English as standard. Additional languages can be selected by the user on the 6901 keypad at product commissioning. German, French, Italian and Spanish.

(3) Product supplied without feedback option fitted (armature voltage control). Encoder and tachometer feedback options sold separately.

(4) Product supplied without communications options fitted. Options sold separately.

## DC590+ Series External Stack Controllers

	1		2	3	4		5	6	7		8	9	10	11
Order example	<b>598P</b>	-	<b>23</b>	<b>26001</b>	<b>0</b>	-	<b>A</b>	<b>P</b>	<b>00</b>	-	<b>U</b>	<b>4</b>	<b>V</b>	<b>0</b>

<b>1 Product family</b>		
<b>598P</b>	DC598+ External Stack Controller - 2Q non-regenerative	
<b>599P</b>	DC599+ External Stack Controller - 4Q Regenerative	
<b>2 Supply voltage</b>		
<b>23</b>	110...220 V 3 ph	
<b>53</b>	220...500 V 3 ph	
<b>73</b>	500...690 V 3 ph	
<b>3 Current / Power Ratings @110...220 V 3 ph</b>		
	Output current [A]	Frame Size
<b>26001</b>	60	1
<b>31201</b>	120	1
<b>4 Auxiliary Supply</b>		
<b>0</b>	Universal 115 V...230 V 1 ph (60 Amp rating only)	
<b>1</b>	115 V 1 ph (120 Amp rating only)	
<b>2</b>	230 V 1 ph (120 Amp rating only)	
<b>5 Trigger Option</b>		
<b>A</b>	Amplifiers	
<b>T</b>	Trigger (23 and 53 supplies only)	

<b>6 Mounting</b>		
<b>P</b>	Panel mounting (1)	
<b>7 Special Options</b>		
<b>00</b>	None	
	Documented special options (01...99) (refer to local sales office)	
<b>8 Languages</b>		
<b>U</b>	English (50/60 Hz) (2)	
<b>9 Keypad</b>		
<b>4</b>	6901 keypad installed	
<b>10 Speed Feedback</b>		
<b>V</b>	Armature voltage (3)	
<b>11 Communications</b>		
<b>0</b>	None (4)	

(1) Frame 4 ventilation duct kit sold as separate part LA466717U001-1.

(2) Product sold with English as standard. Additional languages can be selected by the user on the 6901 keypad at product commissioning. German, French, Italian and Spanish.

(3) Product supplied without feedback option fitted (armature voltage control). Encoder and tachometer feedback options sold separately.

(4) Product supplied without communications options fitted. Options sold separately.



# Parker Worldwide

## Europe, Middle East, Africa

### AE – United Arab Emirates, Dubai

Tel: +971 4 8127100  
parker.me@parker.com

### AT – Austria, St. Florian

Tel: +43 (0)7224 66201  
parker.austria@parker.com

### AZ – Azerbaijan, Baku

Tel: +994 50 2233 458  
parker.azerbaijan@parker.com

### BE/NL/LU – Benelux,

Hendrik Ido Ambacht  
Tel: +31 (0)541 585 000  
parker.nl@parker.com

### BG – Bulgaria, Sofia

Tel: +359 2 980 1344  
parker.bulgaria@parker.com

### BY – Belarus, Minsk

Tel: +48 (0)22 573 24 00  
parker.poland@parker.com

### CH – Switzerland, Etoy

Tel: +41 (0)21 821 87 00  
parker.switzerland@parker.com

### CZ – Czech Republic, Klecany

Tel: +420 284 083 111  
parker.czechrepublic@parker.com

### DE – Germany, Kaarst

Tel: +49 (0)2131 4016 0  
parker.germany@parker.com

### DK – Denmark, Ballerup

Tel: +45 43 56 04 00  
parker.denmark@parker.com

### ES – Spain, Madrid

Tel: +34 902 330 001  
parker.spain@parker.com

### FI – Finland, Vantaa

Tel: +358 (0)20 753 2500  
parker.finland@parker.com

### FR – France, Contamine s/Arve

Tel: +33 (0)4 50 25 80 25  
parker.france@parker.com

### GR – Greece, Piraeus

Tel: +30 210 933 6450  
parker.greece@parker.com

### HU – Hungary, Budaörs

Tel: +36 23 885 470  
parker.hungary@parker.com

### IE – Ireland, Dublin

Tel: +353 (0)1 466 6370  
parker.ireland@parker.com

### IL – Israel

Tel: +39 02 45 19 21  
parker.israel@parker.com

### IT – Italy, Corsico (MI)

Tel: +39 02 45 19 21  
parker.italy@parker.com

### KZ – Kazakhstan, Almaty

Tel: +7 7273 561 000  
parker.easteurope@parker.com

### NO – Norway, Asker

Tel: +47 66 75 34 00  
parker.norway@parker.com

### PL – Poland, Warsaw

Tel: +48 (0)22 573 24 00  
parker.poland@parker.com

### PT – Portugal

Tel: +351 22 999 7360  
parker.portugal@parker.com

### RO – Romania, Bucharest

Tel: +40 21 252 1382  
parker.romania@parker.com

### RU – Russia, Moscow

Tel: +7 495 645-2156  
parker.russia@parker.com

### SE – Sweden, Borås

Tel: +46 (0)8 59 79 50 00  
parker.sweden@parker.com

### SK – Slovakia, Banská Bystrica

Tel: +421 484 162 252  
parker.slovakia@parker.com

### SL – Slovenia, Novo Mesto

Tel: +386 7 337 6650  
parker.slovenia@parker.com

### TR – Turkey, Istanbul

Tel: +90 216 4997081  
parker.turkey@parker.com

### UA – Ukraine, Kiev

Tel: +48 (0)22 573 24 00  
parker.poland@parker.com

### UK – United Kingdom, Warwick

Tel: +44 (0)1926 317 878  
parker.uk@parker.com

### ZA – South Africa, Kempton Park

Tel: +27 (0)11 961 0700  
parker.southafrica@parker.com

## North America

### CA – Canada, Milton, Ontario

Tel: +1 905 693 3000

### US – USA, Cleveland

Tel: +1 216 896 3000

## Asia Pacific

### AU – Australia, Castle Hill

Tel: +61 (0)2-9634 7777

### CN – China, Shanghai

Tel: +86 21 2899 5000

### HK – Hong Kong

Tel: +852 2428 8008

### IN – India, Mumbai

Tel: +91 22 6513 7081-85

### JP – Japan, Tokyo

Tel: +81 (0)3 6408 3901

### KR – South Korea, Seoul

Tel: +82 2 559 0400

### MY – Malaysia, Shah Alam

Tel: +60 3 7849 0800

### NZ – New Zealand, Mt Wellington

Tel: +64 9 574 1744

### SG – Singapore

Tel: +65 6887 6300

### TH – Thailand, Bangkok

Tel: +662 186 7000

### TW – Taiwan, Taipei

Tel: +886 2 2298 8987

## South America

### AR – Argentina, Buenos Aires

Tel: +54 3327 44 4129

### BR – Brazil, Sao Jose dos Campos

Tel: +55 800 727 5374

### CL – Chile, Santiago

Tel: +56 2 623 1216

### MX – Mexico, Toluca

Tel: +52 72 2275 4200

### EMEA Product Information Centre

Free phone: 00 800 27 27 5374

(from AT, BE, CH, CZ, DE, DK, EE, ES, FI, FR, IE, IL, IS, IT, LU, MT, NL, NO, PL, PT, RU, SE, SK, UK, ZA)

### US Product Information Centre

Toll-free number: 1-800-27 27 537

www.parker.com

