
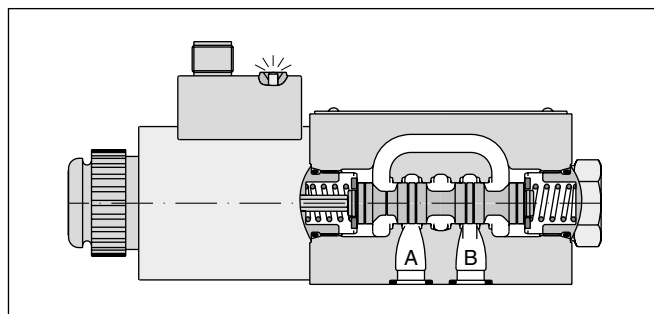


Characteristics

The D1VW 8 Watt series is based on the standard D1VW design. The low watt, low current (<0.5 A) solenoid allows direct connection to a PLC or a bus knot. The valves are offered with standard solenoid connection (as per EN175301-803) and M12 x 1 connection. The version with M12 x 1 connection and LEDs is conform to the DESINA standard (**D**istribut**E**d and **S**tandardised **I**Nst**A**llation technology) for machine tools and manufacturing systems.




2

Technical data

General		
Design		Directional spool valve
Actuation		Solenoid
Size		DIN NG06 / CETOP 03 / NFPA D03
Mounting interface		DIN 24340 A6 / ISO 4401 / CETOP RP 121-H / NFPA D03
Mounting position		unrestricted, preferably horizontal
Ambient temperature	[°C]	-25...+60
MTTF _D value	[years]	150
Weight	[kg]	1.5 (1 solenoid), 2.1 (2 solenoids)
Vibration resistance	[g]	10 Sinus 5...2000 Hz acc. IEC 68-2-6 30 Random noise 20...2000 Hz acc. IEC 68-2-36 15 Shock acc. IEC 68-2-27
Hydraulic		
Max. operating pressure	[bar]	P, A B: 350, T: 210
Fluid		Hydraulic oil according to DIN 51524
Fluid temperature	[°C]	-20 ... +70 (NBR: -25...+70)
Viscosity permitted	[cSt] / [mm ² /s]	2.8...400
Viscosity recommended	[cSt] / [mm ² /s]	30...80
Filtration		ISO 4406 (1999); 18/16/13
Flow max.	[l/min]	60 (see shift limits)
Leakage at 50 bar	[ml/min]	Up to 10 per flow path, depending on spool
Static / Dynamic		
Step response at 95 %	[ms]	Energized: 80...120; De-energized: 35...55
Electrical characteristics		
Duty ratio		100 % ED; CAUTION: coil temperature up to 70 °C possible
Max. switching frequency	[1/h]	10000
Protection class		IP65 in acc. with EN 60529, M12x1 IP67 (each with correctly mounted plug-in connector)
	Code	J
Supply voltage	[V]	24 V =
Tolerance supply voltage	[%]	±10
Current consumption	[A]	0.33
Power consumption	[W]	8
Solenoid connection		Connector as per EN 175301-803, solenoid identification as per ISO 9461 (code WL). Plug M12x1 on coil as per IEC 61076-2-101 (code DL/DLJ5).
Wiring min.	[mm ²]	3 x 1.5 recommended
Wiring length max.	[m]	50 recommended

With electrical connections the protective conductor (PE ⊥) must be connected according to the relevant regulations.

2

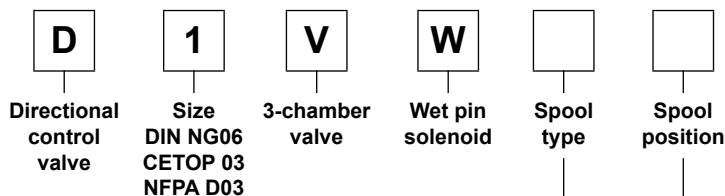

3 position spools	
Code	Spool type
	a 0 b
001	
002	
003	
004	
005	
006	
007	
008 ¹⁾	
009 ¹⁾	
010	
011	
014	
015	
016	
081	
082	
102	

2 position spools	
Code	Spool type
	a b
020	
026	
030	
101	


3 position spools		
Code	Spool position	
C		3 positions. Spring offset in position "0". Operated in position "a" or "b".
	Standard	Spool type 008, 009
E		2 positions. Spring offset in position "0".
	Operated in position "a".	Operated in position "b".
K		2 positions. Spring offset in position "0".
	Operated in position "b".	Operated in position "a".

2 position spools		
Code	Spool position	
B		2 positions. Spring offset in position "b". Operated in position "a".
D ²⁾		2 positions. Operated in position "a" or "b". No center or offset position.
H		2 positions. Spring offset in position "a". Operated in position "b".

Please order plug separately.
 Further spool types on request.

Bold letters =
 Short-term availability


¹⁾ Consider specific spool position.
²⁾ Only for spool 020 available.

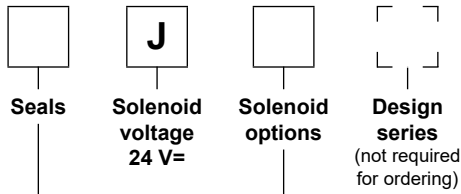


Code	Solenoid options
WL	Connector as per EN 175301-803, 8 Watt
DL	Connector M12x1 as per IEC 61076-2-101, 8 Watt, pin assignment see below
DLJ5	Connector M12x1 as per IEC 61076-2-101, 8 Watt, DESINA, pin assignment see below

Code	Seals
N	NBR
V	FPM

M12 pin assignment, code „DL“, surge diode with LED ¹⁾, pins 1 and 2 not connected

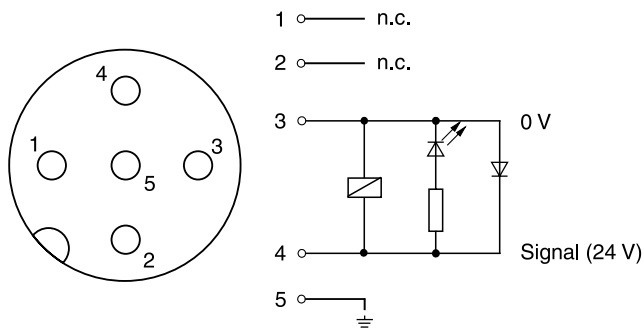

M12 pin assignment DESINA design, code „DLJ5“, surge diode with LED ¹⁾, pins 1 and 2 connected

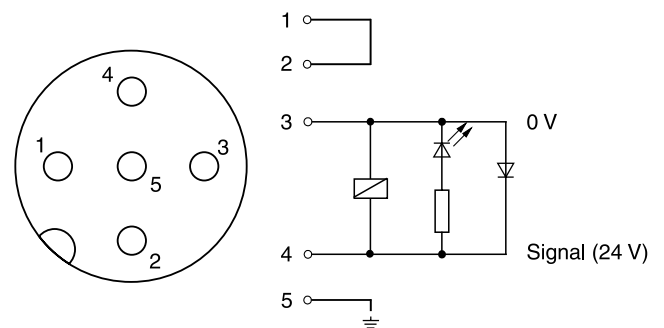


¹⁾ Max. voltage peak 50 V

The flow curve diagram shows the flow versus pressure for each spool type, operating position and flow direction is given in the table below.

2

Spool	Position „b“		Position „a“		Position „0“				
	P->A	B->T	P->B	A->T	P->A	P->B	A->T	B->T	P->T
001	3	3	3	3	-	-	-	-	-
002	3	4	3	4	1	1	3	3	1
003	4	4	4	5	-	-	4	-	-
004	3	4	3	4	-	-	4	4	-
005	3	3	3	3	8 (max. 30l)	-	-	-	-
006	3	4	3	4	4	4	-	-	-
007	4	3	3	3	-	2	-	1	4
010	4	-	4	-	-	-	-	-	-
011	3	3	3	3	-	-	11 (max. 25l)	11 (max. 25l)	-
014	4	3	3	3	2	-	1	-	4
015	4	5	4	4	-	-	-	4	-
016	3	3	3	3	-	8 (max. 30l)	-	-	-
020B	4	4	3	4	-	-	-	-	-
026B	4	-	4	-	-	-	-	-	-
030B	3	4	4	3	-	-	-	-	-
081	9	10	9	10	-	-	-	-	-
082	9	10	9	10	-	-	-	-	-
101B	4 (max. 40l)	7	7	6	-	-	-	-	-
102	3	4	3	4	3	3	5	5	3
	P->B	A->T	P->A	B->T	P->A	P->B	A->T	B->T	P->T
008	4	5	4	5	-	-	-	-	6
009	5	5	5	5	-	-	-	-	4

Flow curve diagram


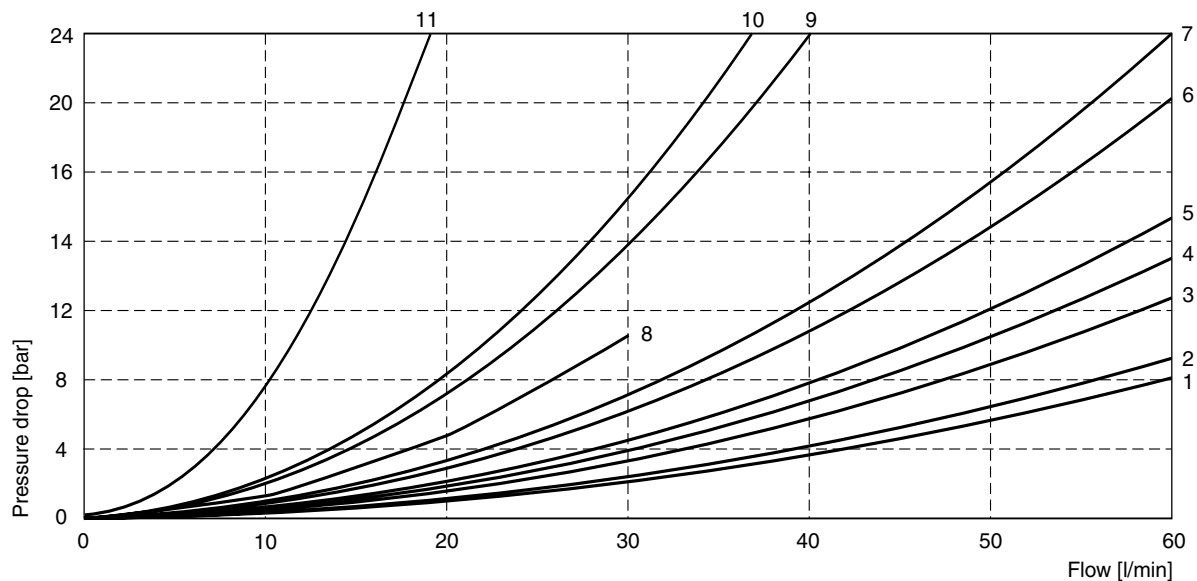


All characteristic curves measured with HLP46 at 50 °C.

The diagram below specifies the shift limits. The specifications apply to a viscosity of 40 mm²/s and balanced flow conditions. The shift limits can be considerably

lower at unbalanced flow conditions. To avoid flow rates beyond the shift limits, a plug-in orifice can be inserted in the P-port.

Shift limits

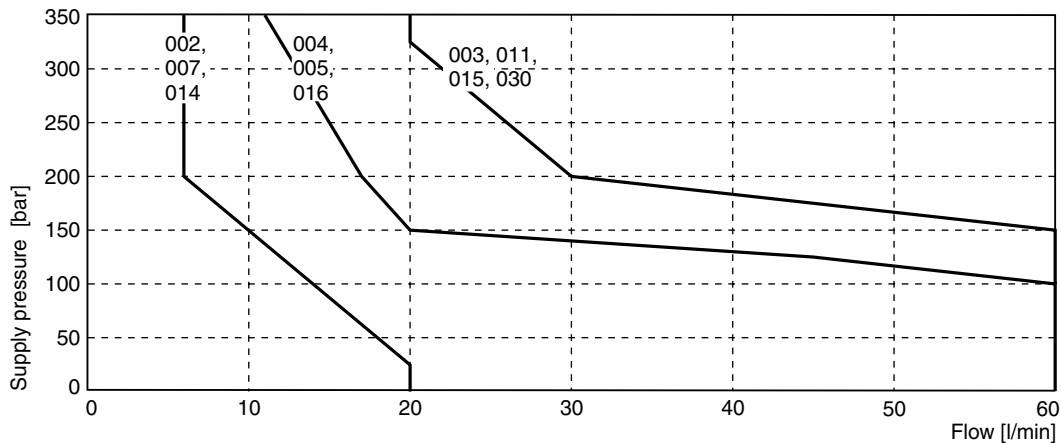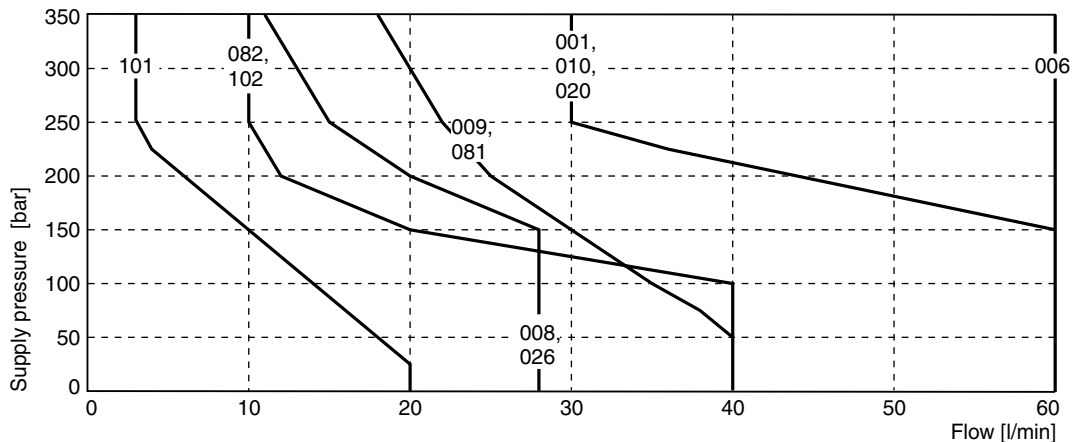



Measured with HLP46 at 50 °C, 90 % U_{nom} and warm solenoids.

Dimensions


Interface EN 175301-803, DC solenoid, WL
Style B, E

Style H, K

2

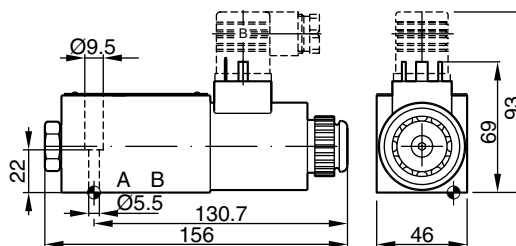
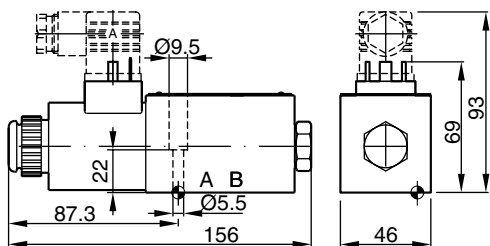


Style C, D


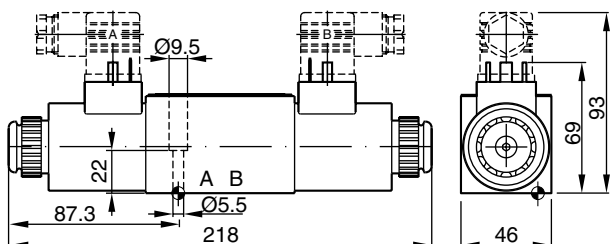


M12x1 connector, DC solenoid, DLJ5 (DESINA) or DL
Style B, E

Style H, K

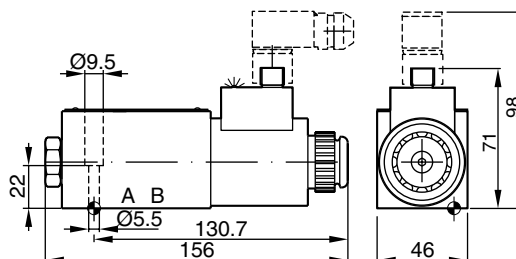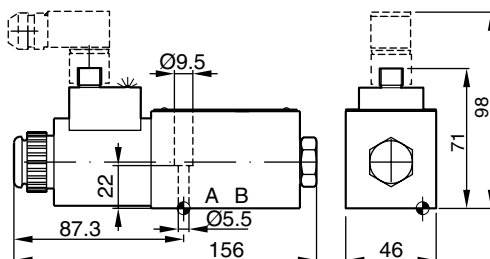

Style C, D

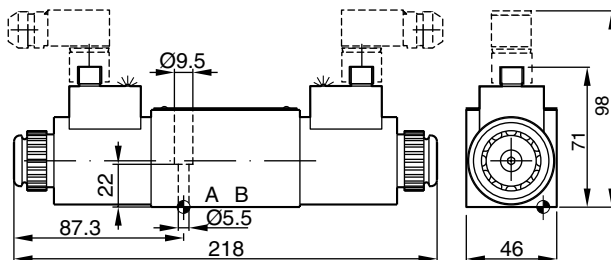

Surface finish	Kit	Kit	Kit	Kit
$\sqrt{R_{max} 6.3}$ $\square_{0.01/100}$	BK375	4x M5x30 ISO 4762-12.9	7.6 Nm ±15 %	NBR: SK-D1VW-N-91 FPM: SK-D1VW-V-91

The space necessary to remove the plug per EN 175301-803, design type AF is at least 15 mm.
The torque for the screw M3 of the plug has to be 0.5 to 0.6 Nm.