



Electronic Control System Components

Catalog HY33-1800/US
North American Product Offering



ENGINEERING YOUR SUCCESS.

Task oriented controller, valve driver moduleIQAN-LSL..... [3](#)**Input devices, analog levers and joysticks**IQAN-LST..... [4](#)IQAN-LC5-X05..... [5](#)MP handle for IQAN-LC5-X05..... [6](#)IQAN-LC6-X05..... [7](#)**Monitoring devices, sensors**IQAN-SP..... [8](#)IQAN-SCP..... [9](#)IQAN-ST..... [10](#)TGSS..... [11](#)CDS-125..... [12](#)IQAN compatible Parker sensors..... [13-15](#)**Accessories**IQAN tools, cables and connector kits..... [16](#)TGSS (True Ground Speed Sensor) Doppler Effect..... [16](#)**Terms of sale with Warranty Limitations**Offer of sale..... [17](#)**WARNING - USER RESPONSIBILITY****FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.**

- This document and other information from Parker-Hannifin Corporation, its subsidiaries and authorized distributors provide product or system options for further investigation by users having technical expertise.
- The user, through its own analysis and testing, is solely responsible for making the final selection of the system and components and assuring that all performance, endurance, maintenance, safety and warning requirements of the application are met. The user must analyze all aspects of the application, follow applicable industry standards, and follow the information concerning the product in the current product catalog and in any other materials provided from Parker or its subsidiaries or authorized distributors.
- To the extent that Parker or its subsidiaries or authorized distributors provide component or system options based upon data or specifications provided by the user, the user is responsible for determining that such data and specifications are suitable and sufficient for all applications and reasonably foreseeable uses of the components or systems.

OFFER OF SALE

The items described in this document are hereby offered for sale by Parker-Hannifin Corporation, its subsidiaries or its authorized distributors. This offer and its acceptance are governed by the provisions stated in the detailed "Offer of Sale" elsewhere in this document or available at www.parker.com.

SAFETY

For safety information, see Safety Guide at www.parker.com/safety or call 1-800-CParker.



Application

The IQAN-LSL is an analog lever in the IQAN product group. This lever focuses on compact design, weather resistance and safety.

The LSL is a single-axis joystick, 0.5 - 4.5 Vdc, intended for the proportional control of one doubleacting hydraulic function. The lever has several options including a manual neutral detent and a switch in the top of the handle. For 24V systems there are solenoid detent options at full stroke in the minus direction or both plus and minus directions. A solenoid detent at 75% in the B (minus) direction is also available. The LSL can be mounted in the armrest or on the dashboard in mobile vehicles. It has a comfortable grip and is easily actuated for good ergonomics.

The IQAN-LSL is lightweight with small installation dimensions. The ergonomic design assures a comfortable grip from several angles. Mounting screws are installed from underneath for a clean appearance of dashboard, panel or armrest.

The standard IQAN-LSL has an IP65 rating above the flange and the cable has a Deutsch DT series transportation connector.

The IQAN-LSL is a spring centered, dual sensor device. The optional switch in the top of the handle can be used to detect operator presence. The dual sensors provide 0.5 - 4.5 Vdc and 4.5 - 0.5 Vdc outputs which allows error checking to meet high safety requirements. All inputs and outputs are protected against short circuit to ground. The LSL is well suited as a control unit for a variety of valve drivers.

Description

IQAN-LSL-E0-//--D

Consult datasheet and pricelist for IQAN-LSL detent and connector options and their ordering part numbers.

Ordering PN

20014069



General

Weight	0.22 Kg
Rated power supply (V _S)	5 Vdc
Load resistive (min.)	4.5 kΩ
Load capacitive (max.)	1 μF
Current consumption	16 mA

Mechanical

Angle of movement	±20°
Expected life (operations)	5 million

Environment

Operating temperature	-40° to 70 °C
Sealing above the flange	IP65
Sealing with DN option	IP44

Analog outputs

Active range (VDC out)	10%-90% V _S
Resolution	<2mV

Digital output option


Handle switch, top	V _{BAT} (+12V, +24V)
Max load current, DOUT	200 mA

Other options

Mechanical detent	Neutral only
Solenoid detents	V _{BAT} (+24V only)

Connectors

-D	Deutsch DT04
----	--------------

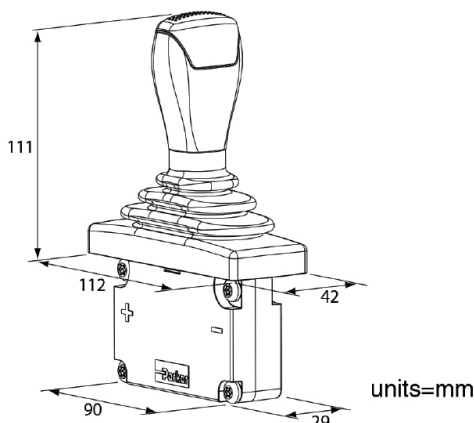



Application

The IQAN-LST is a paddle style, analog mini-lever in the IQAN product group. This lever focuses on compact design, weather resistance and safety.

The LST is a small single-axis joystick 0.5 - 4.5 Vdc, intended for the proportional control of one doubleacting hydraulic function. The combination of a minilever and armrest can provide substantial ergonomic benefits. The LST can be mounted in the armrest or on the dashboard in mobile vehicles. It is easily actuated with a fingertip for good ergonomics.

The IQAN-LST is lightweight with small installation dimensions. The LST also has low, well-adapted forces designed in for ease of operation in close quarters.

The lever is covered with friction rubber on either side, to prevent the fingers from slipping and to provide a comfortable feel. Mounting screws are installed from underneath for a clean appearance of the dashboard, panel or armrest.

The IQAN-LST is designed for the outdoor environment. The electronics are potted and the cable has a choice of either a Saab sealed AMP junior-power timer connector or a Deutsch DT series transportation connector. These features combine to give the LST an IP66 rating.

The IQAN-LST is a spring centered, dual sensor device. The dual sensors provide 0.5 - 4.5 Vdc and 4.5 - 0.5 Vdc outputs which allows error checking to meet high safety requirements. All inputs and outputs are protected against short circuit to ground. It is well suited as an input device for a variety of valve drivers.



General

Weight	0.04 Kg
Rated power supply (V _S)	5 Vdc
Load resistive (min.)	4.5 kΩ
Load capacitive (max.)	1 μF
Current consumption	16 mA

Mechanical

Angle of movement	±30°
Expected life (operations)	5 million

Environment

Operating temperature	-40° to 70 °C
Sealing	IP66

Analog Outputs

Active range (Vdc out)	10%-90% VS
Resolution	<2mV

Connectors


-S	Saab (AMP/Tyco JPT)
-D	Deutsch DT04

Description

IQAN-LST-S
 IQAN-LST-D

Ordering PN

20011381
 20014070

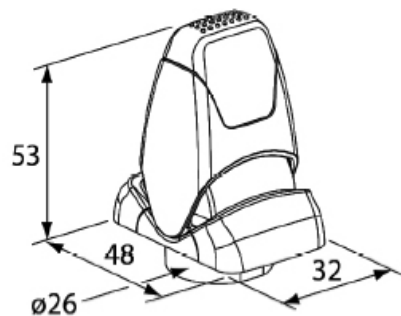

units=mm





Application

The IQAN-LC5-X05 is a large, coordinate joystick that incorporates ruggedness, functionality, light weight with high flexibility for mobile market applications. The unit is extremely robust, able to withstand aggressive conditions during outdoor use and in outdoor installations, including EMI, vibrations and a wide temperature range. The IQAN-LC5-X05 features a compact ergonomic design making it ideal for armrest and panel installations in mobile equipment. Fourth generation ICL4 type joysticks with N or G handles are easily replaced with the IQAN-LC5-X05.

The joystick base has an integrated Deutsch transportation connector. The handle cable may be routed completely through the non-corrosive housing. This makes field mounting of new handles, or replacing a bellow, very easy to accomplish.

All proportional output signals are of contactless Hall effect type with dual sensors to provide redundancy for high safety and reliability. The primary signal for each axis is 10%-90% of supply voltage. The corresponding secondary signal is 90%-10% of supply voltage.

Description

- IQAN-LC5-X05-U1
- IQAN-LC5-X05-U2
- IQAN-LC5-X05-N2
- IQAN-LC5-X05-N2T
- IQAN-LC5-X05-N4
- IQAN-LC5-X05-N4T
- IQAN-LC5-X05-G

Ordering PN

- 20076317
- 20076318
- 20077692
- 20077695
- 20077699
- 20077694
- 20077753



General (Lever base)

Weight	0.37 kg
Rated power supply (VS)	5 VDC
Load resistive (min.)	4.5 kW
Load capacitive (max.)	1 µF
Current consumption	16 mA (5Vdc)

Mechanical (Lever base)

Angle of movement	±18°
Expected life (full stroke cycles)	5 million
Lever force in neutral, XY	0.6 Nm
Full actuated, XY direction	1.4 Nm
One time loading (max.)	100 Nm

Environmental

Temperature range	
Operating, ambient	-40 to +85° C
Storage, ambient	-40 to +100° C
Sealing, above flange	IP65 (with sealed handle and bellow)

Electrical (Lever base)


Over voltage range	11Vdc @ 10 minutes
--------------------	--------------------

Connection (Lever base)

Electrical connection	Deutsch DTM, 6 pos.
-----------------------	---------------------

Analog outputs

Active range (Vdc out)	10%-90% V _S
Resolution	<2 mV

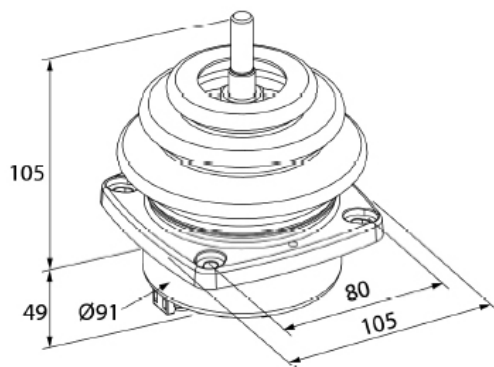

units=mm





Application

The MP handle option provides a variety of control interfaces in an ergonomic, multi-function handle that comfortably fits your hand. The handle is a robust design, able to withstand heavy use in outdoor installations, including exposure to a wide range of automotive chemicals. The handle has the capability to have a maximum of 8 buttons or 2 proportional thumb wheels in the faceplate. Combinations of buttons, thumb wheels, and trigger are also possible. The MP handle will be assembled to the IQAN-LC5-X05 base, and the cables are routed through the base. The push buttons and thumb wheel are easily connected to the vehicle wire harness by a Deutsch DTM connector.

The MP handle is made to fit either the right or left hand, reducing inventory part numbers. The buttons are large, and have a nice tactile feel. The proportional thumb wheel has dual sensors providing 2 crossed outputs that may be compared in IQAN modules for safe operation.


Description

- IQAN-LC5-X05-MPB2W0T0
- IQAN-LC5-X05-MPB2W0T1
- IQAN-LC5-X05-MPB2W2T1
- IQAN-LC5-X05-MPB4W0T0
- IQAN-LC5-X05-MPB4W0T1
- IQAN-LC5-X05-MPB4W1T1

Ordering PN

- 20076320
- 20076321
- 20076323
- 20076324
- 20076325
- 20076327

Consult datasheet and pricelist for other IQAN-LC5-X05-MP options and ordering part numbers.

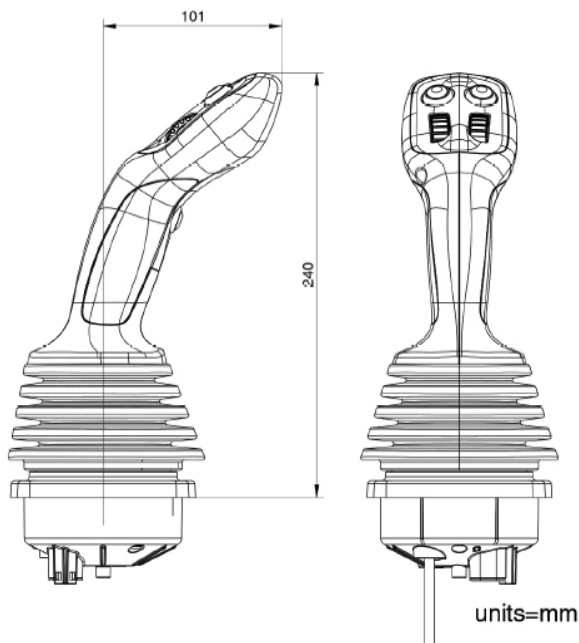

General (Handle)

Weight	.25 kg
Temperature range	-40 to +85° C
Sealing	outdoor use

Buttons/ Trigger

Expected life (electrical)	0.5 million
Expected life (mechanical)	1 million
Travel	1.5 mm
Actuating force	2 - 5 Nm
Switching current (max)	400 mA, 32 VAC, resistive load



Thumb Wheel

Rated power supply (Vs)	5 Vdc
Load resistive (min)	4.5 kW
Load capacitive (max)	1 uF
Current consumption (typ) 1	6 mA
Analog output active range	10%-90% Vs
Resolution	< 2 mV
Angle of movement	± 25 degrees
Expected life (operations)	5 million

Connection

B0W0T1 / B2W0T0 / B2W0T1 / B4W0T0	Deutsch DTM, 6 p.
B4W0T1 / B4W1Tx / B2W2Tx / B8W0Tx	Deutsch DTM, 12 p.

MP Standard Diagram Configurations

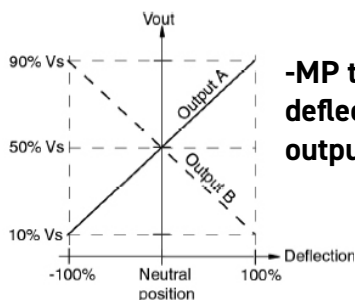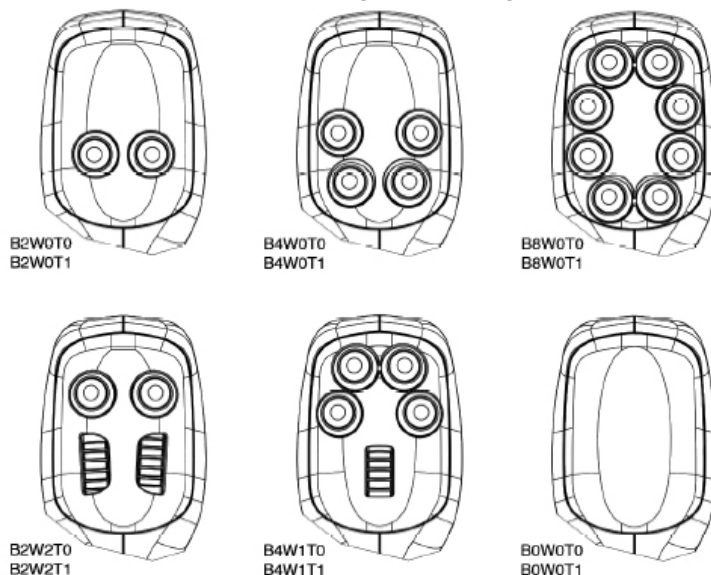

-MP thumbwheel deflection vs. output diagram





Application

The IQAN-LC6-X05 is a mini-coordinate joystick that incorporates ergonomic design with ruggedness, functionality, light weight and high flexibility for mobile market applications. The unit is designed to withstand aggressive conditions in different types of mobile equipment. The LC6 has a compact ergonomic design and small dimensions that make it ideal for armrest and panel mounting. The IQAN-LC6-X05 is designed for outdoor use. The housing and handle have potted electronics and are rated up to IP67.

The ergonomic handle has a unique, patent pending, rotary knob function that adds a fourth proportional function integrated in the handle. The design gives the user a benefit to control all joystick proportional functions without changing their grip on the handle, and makes the LC6 ideal for repetitive, precise motion control during extended periods in mobile applications. The 4th axis default fitted ring has a small diameter, however, if needed, the operator can attach a larger sized ring to provide a different grip feeling.

All proportional output signals in joystick, rocker and knob are of contactless Hall effect type with dual sensors to provide redundancy for safety and reliability. A magnet shielding technology is used to protect the joystick from external magnetic fields.

IQAN-LC6-X05 joystick redundant signals allow error checking to make it easy for the application designer to meet high safety requirements by using IQAN software. The primary signal for each axis is 10%-90% of supply voltage. The corresponding secondary signal is 90%-10% of supply voltage.

Description

IQAN-LC6-X05-U0
 IQAN-LC6-X05-H1R1K0
 IQAN-LC5-X05-H1R1K1

Ordering PN

20077757
 20077758
 20077759



General (Joystick and Handle)

Weight	0.40 kg (base)
Weight	0.75 kg (base + handle)
Power supply (Vs)	4.5 to 5.5 Vdc
Current (base)	Max 65 mA (@ 5Vdc)
Current (rocker+knob)	Max 65 mA (@ 5Vdc)
CE marking	2004/108/EC

Mechanical

Angle of movement	
Base	20°
Rocker	20°
Knob	20°
Expected life	5 million cycles

Environmental


Temperature	
Operating,	-40 to +70° C
Storage,	-40 to +85° C
Electronics sealing	P67 ¹

Analog Outputs

Analog output range	10%-90% Vs
Resolution	<2 mV)

Connection

LC6-X05-U0 Molex	MicroFit 3.0
LC6-X05-H1-R1K0	Molex MicroFit 3.0
LC6-X05-H1-R1K1	Molex MicroFit 3.0

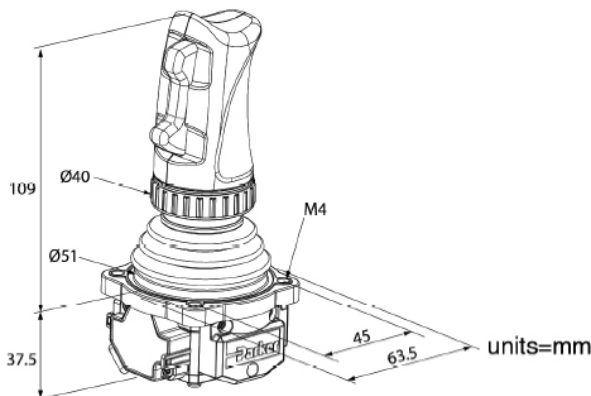



Application

The IQAN-SP pressure transducers belong to the family of IQAN accessories developed to complement IQAN control systems. IQAN-SP is a range of 0-5V pressure transducers for mobile hydraulic applications. These transducers are available in two pressure ranges; 35 bar (507 psi) and 500 bar (7250 psi). To make the sensors suitable for mobile equipment, we have focused upon properties such as reliability, electromagnetic immunity and ease of installation.

Reliability

The IQAN-SP has stainless steel construction for strength. The sensor cells use thin film technology with no internal o-rings or fluid. The high pressure capability makes the sensor very robust and able to withstand vibration.

Electromagnetic Immunity

The design of the IQAN-SP has an EMI cap that separates the sensor electronics from the connector. This ensures a high level of EMI protection.

Installation

The IQAN-SP is well designed for the mobile hydraulics industry. The 3 pin connector is a sealed AMP Junior Power Timer (Bosch Jetronic) type designed for automotive use. This connector gives the sensor IP65 protection for exposed outdoor applications.

The hex of the G1/4 BSP threaded transducer has an integrated face seal to eliminate sealing washers. These features provide for easy installation and removal, even in field conditions.


Description

IQAN-SP035
IQAN-SP500

Ordering PN

5020026
5020027

For IQAN compatible compact pressure sensors with Deutsch connectors and SAE threads, and their ordering part numbers, consult the SCP datasheet and pricelist.

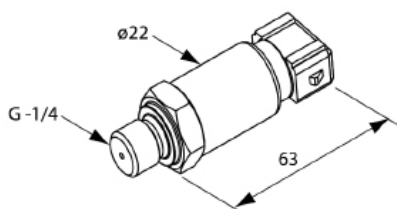

General

Weight	0.06 kg
Operating temperature	-40 °C to 125 °C
Storage temperature	-40 °C to 140 °C
Pressure range	
SP035	0 - 35 bar
SP500	0 - 500 bar
Over pressure	
SP035	Max 100 bar
SP500	Max 1050 bar
Burst pressure	
SP035	Min 150 bar
SP500	Min 1500 bar
Total error (-40°C to 105°C) ¹⁾	Max 4.0 % FS
Total error (40°C to 80°C) ¹⁾	Max 1.0 % FS
Response time ²⁾	5.0 msec

1) Total accuracy includes non- linearity, hysteresis, repeatability and temperature effects.

2) Measured from initial value to output at 90%.

Electrical Specifications

Output at FS ³⁾	4.5 VDC
Zero output ³⁾	0.5 VDC
Supply Voltage(Vs)	5.0 ±10% VDC ⁴⁾
Current supply	Max 12.5 mA
Load resistor	Min 5k ohm
Load capacitor	Max 0.1 µF

3) The output is ratiometric to supply voltage (Vs)

4) The max supply voltage with sensor operating is 6 Volt. (switch off app. 6.2 Volt)

Threaded Interface

with integral face seal G1/4 BSP

Connector

Integral to sensor AMP JPT



Application

The SCP pressure sensor belongs to the Parker family of accessories provided to complement electronic control systems. The SCP sensor family is a range of 0-5 V pressure transmitters for mobile hydraulic applications.

These transmitters are available in three standard pressure ranges; 35 bar (507 psi), 250 bar (3625 psi) and 500 bar (7250 psi). The sensors feature compact construction, high linearity and excellent electromagnetic interference resistance.

Properties

Reliability



The SCP has stainless steel construction for strength. The sensor cells use thin film technology with no internal o-rings or fluid. The high pressure capability makes the sensor very robust and able to withstand heavy vibrations.

Electromagnetic immunity

The design of the SCP separates the sensor electronics from the connector. This ensures a high level of EMI protection.

Installation

The interface type of the SCP is a SAE 6 (9/16"-18UNF) thread with o-ring seal. The connector is a sealed, Deutsch DT type and is integrated into the sensor body. The sealed connector gives the sensor protection for exposed outdoor applications. The SCP is easy to install and remove, even in field conditions.

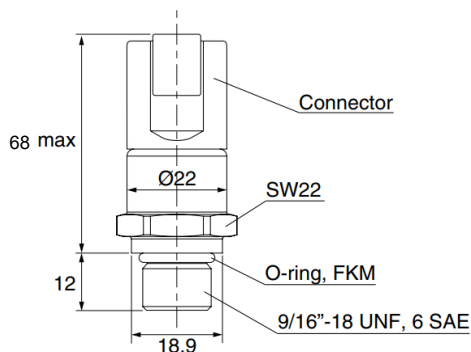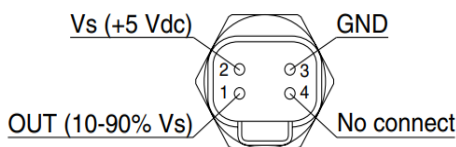

units = mm



General

Weight	50 g
Operating temperature	-40 °C to 125 °C
Storage temperature	-40 °C to 125 °C
Pressure range	see code in table below
Over pressure code "035"	Max 70 bar
code "250"	Max 500 bar
code "500"	Max 1000 bar
Burst pressure code "035"	Min 140 bar
code "250"	Min 1000 bar
code "500"	Min 2000 bar
Accuracy	
Total error (-40°C to 125°C)	Max 2.5 % FS
Total error (-25°C to 100°C)	Max 1.5 % FS
Repeatability	Max 0.2 %

Electrical specifications

Output at FS ¹⁾	4.5 V (90%)
Zero output ¹⁾	0.5 V (10%)
Supply Voltage (Vs)	5.0 Vdc
Load resistor	Min 10 kΩ
Current supply	Max 6 mA
Response time	Max 1 msec


1) The output is ratiometric (code "R") to supply voltage, Vs.

Threaded interface

code "6" SAE 6, 9/16"-18 UNF

Connector

Integral to sensor see code in table below

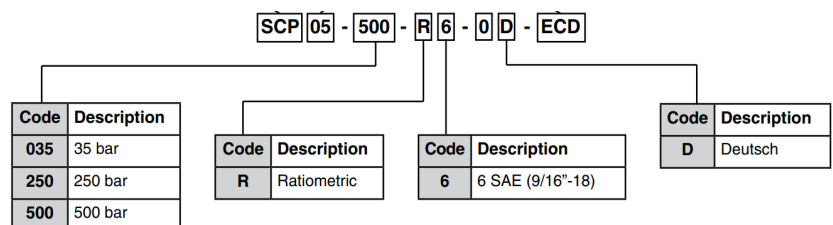



Application

The IQAN-ST temperature transducer belongs to the family of IQAN accessories developed to complement IQAN control systems. IQAN-ST is a 0-5V output temperature transducer for mobile hydraulic applications. This transducer is available in three interface types; G1/4 BSP, M10 and 9/16" - 18 UNF SAE 6. The G1/4 BSP and M10 sensors have an integral Bosch automotive connector. The SAE 6 sensor has a short cable-mounted Deutsch connector.



The IQAN-ST has stainless steel construction for strength. The PT100 sensor uses thin film technology with internal amplification. All versions of the sensor have high pressure capability. The IQAN-ST is very robust and able to withstand heavy vibrations.

The design of the IQAN-ST has an EMI cap that separates the sensor electronics from the connector. This ensures a high level of EMI protection.


The IQAN-ST is well designed for the mobile hydraulics industry. The 3 pin integral connector is a sealed AMP Junior Power Timer (Bosch Jetronic) type. The Deutsch connector is the DT04 type. Both connectors are designed for automotive use. These connectors give the sensor IP65 protection for exposed outdoor applications. The hex of the G1/4 BSP and M10 versions of the transducer have integrated face seals to eliminate loose sealing washers. The SAE 6 sensor type has a factory installed o-ring. These features provide for easy installation and removal, even in field conditions.

Description

IQAN-ST-G-B
 IQAN-ST-M-B
 IQAN-ST-U-D

Ordering PN

20073657
 20073659
 20073658

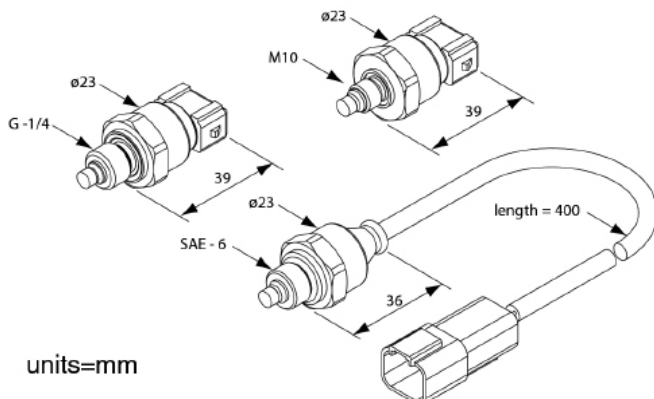

General

Weight	50 g
Operating temperature	-50 to 150°C
Protection	outdoor use
Pressure rating	
G (1/4 BSP)	Max 700 bar
M (M10)	Max 350 bar
U (SAE 6)	Max 1000 bar
Electrical	
Voltage supply VS	5±0.5 Vdc Max 6 Vdc
Current consumption	5.0 µA Max 7.5 µA
Total error (25°C)	1%
Total error (-40 to 150°C)	4%

Output

FS (150°C)	4.75 Vdc
Zero (-50°C)	0.25 Vdc
Span	4.50 Vdc
Ratiometricity	1%
Linearity	1% FS

Threaded Interfaces

-G	G1/4 DIN 3852-E with integral FKM face seal
-M	M10 x 1, with integral face seal
-U	9/16" - 18 UNF, SAE 6 with NBR o-ring seal

Connectors

-B	Bosch (AMP Junior Timer)
-D	Deutsch DT04-4P





Application

The True Ground Speed Sensor (TGSS) belongs to the Parker family of accessories provided to complement electronic control systems. The sensor determines true ground speed using Doppler beam technology and reports the information using a frequency signal. The TGSS is intended for vehicle and other applications with a steady voltage of less than or equal to 16 Vdc. The general market versions of the sensor have a short cable with either an attached AMP Superseal or a Deutsch DT series connector. To make the sensor suitable for mobile equipment, we have focused upon properties such as reliability and ease of installation.

Properties

Features

The TGSS has an ABS plastic construction for sturdiness and corrosion resistance. The sensor uses planar antenna, Doppler effect technology for trouble free operation. A microwave signal transmitted out of the sensor is reflected off the target and received by the sensor. The ground speed is calculated by measuring the change in frequency. The sensor can be specified with one of 2 microwave carrier frequencies, either the standard frequency, or one suitable for the United Kingdom. The TGSS mounts to a bracket on the underside of the vehicle where the sensor may be pointed in either the forward or reverse direction. Built to meet stringent SAE J1455/EP455 environmental standards, the sensor is very robust and able to withstand rugged applications.

Reliability

The TGSS is well designed for the mobile equipment industry. The connectors are weatherproof, AMP Superseal or Deutsch DT type, designed for automotive use. The connector, combined with potted electronics, gives the sensor protection for exposed outdoor applications. The 3 point, shock absorbing mounting pattern in the base simplifies alignment. These features provide for easy installation and removal, even in field conditions. TGSS users appreciate the sensor's robust design as well as its adherence to industry standards for the environment (ANSI/ASAE EP455). The TGSS passes all the requirements of the European EMC directive and has CE approval and e-mark approval. All of these features make the True Ground Speed Sensor easy to integrate into any agricultural equipment or off-highway vehicle.



General

Weight	460 g
Temperature range	
Operating, ambient	-40 to +85 °C
Storage, ambient	-55 to +125 °C
Protection	IPX6 equivalent
Speed range	0.3-44 mph [0.5-70 kph]
Uncalibrated accuracy	± 5%
Calibrated accuracy	
2.0 to 44 MPH	± 1%
0.20 to 2.0 MPH	± 3%
Velocity change detection	
dv/dt < 4 mph	200 ms

Mechanical characteristics

Case	ABS plastic
Mount	3 x M6 bolts
Cable, length	200 mm

Connector

-A	AMP Superseal 1.5
-D	Deutsch (DT04)

Electrical characteristics


Voltage supply	9 - 16 Vdc
Current draw	
Doppler signal only	30 mA@12 Vdc
Microwave frequency	
Standard	24.125 GHz +/- 50 MHz
United Kingdom (-UK)	24.300 GHz +/- 50 MHz
Scaling factor	
-A	1.0 scaling
-D	0.75 scaling
Digital output (sensor present)	
-A	0
-D	1
Max load	100 mA

Compliances

Industry Canada	RSS-210
FCC	Part 15
FCC ID	MGR740030A

Ordering part numbers

TGSS, -A	0740059ECD
TGSS, -A,	-UK 0740078ECD
TGSS, -D	0740051ECD
TGSS, -D,	-UK 0740072ECD

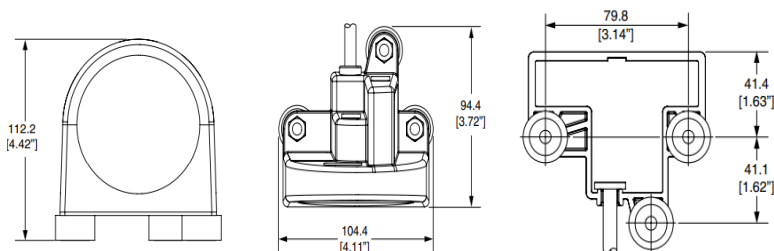



Application

The CDS-125 belongs to the Parker family of accessories provided to complement electronic control systems. This is a compact force sensor built for agricultural planters (one unit per row), sweeping and clamping solutions. Designed using a full scale load of 1500 lbf and an overload protection of 3500 lbf. This sensor operates from 5Vdc and generates a highly responsive analog signal which can be used for closed loop force control. A robust sensor built to withstand harsh work environments for simplified OEM installation. Compact design enables flexible placement with a diameter of 1.25" while utilizing a 3 pin Deutsch connector for supply, ground and signal connection.

Properties

Features

The stainless steel exterior offers excellent fluid compatibility and use in off-road equipment with enhanced reliability and trouble free operation. Manufactured with a 50 in cable allows flexibility in sensor mounting and system connection. The CDS-125 range of measurement is zero to 1500lbf and is highly accurate from zero to 100lbf(445 N). This performance supports ground engagement or applications requiring near zero force sensitivity.

Reliability

The CDS-125 is well designed for off-road mobile applications. Stainless steel exterior combined with water proof connector and encapsulated electronics produce a rugged sensor resistant to high vibration, diverse fluids while being exposed to extreme temperatures. Rated to IP67, IP69k the sensor can operate in high moisture conditions. The force sensor rapid response to force changes enable direct feedback in force control applications like Parkers Downforce System or stand-alone systems.



General

Weight	
Temperature range	
Operating, ambient	-20 to +65 °C
Operating, Humidity	0-100% RH
Storage, ambient	-40 to +85 °C
Protection	IP67, IP69K

Standard

Full Scale Load	1500lbf
Overload Protection	3500lbf

Mechanical characteristics


Case	Stainless Steel
Cable, length	50 in.

Connector

Deutsch (DTM04-3P)

Electrical characteristics

Voltage supply	5VDC (+/- 10%)
Current draw	15mA max
Ratiometric	10% to 90% Supply
Ground Repeatability	-15 + 15 lbf
Response	<10msec
Output Error	+/- 3% FS

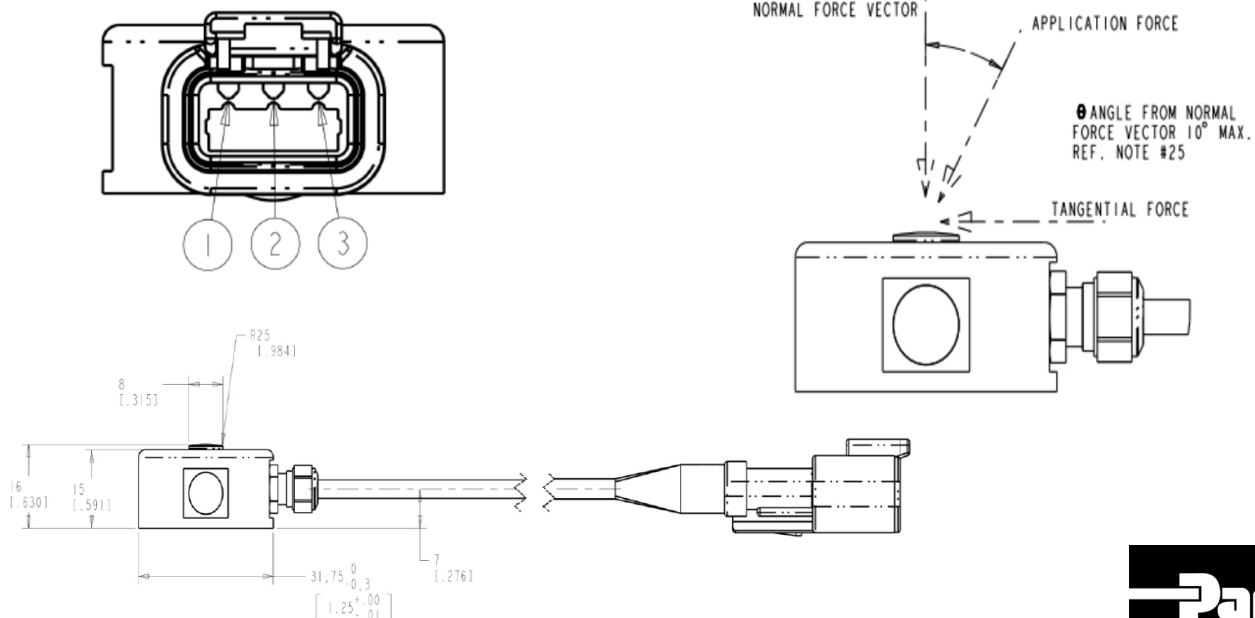




Proximity Sensors


01695ECD

FP2000 sensor is a normally open, ferrous proximity sensor with max. .20" air gap, sense zone on side.
 cable: 12 inches, connector: Deutsch DTM04-2P




01038ECD

FP2000 same as above except: sense zone on top.
 cable: 8 inches, connector: flying leads



01699ECD

FP3000 sensor is a normally open, ferrous proximity sensor with max. .40" air gap.
 cable: 12 inches, connector: Deutsch DTM04-2P



01062ECD

FP3000 same as above except: normally closed,
 cable: 10.5 inches, connector: Deutsch DT04-4P




01778ECD

same as FP3000 sensor 01699 except with a vertical, adjustable mounting style case.
 cable: 12 inches, connector: Deutsch DTM04-2P




01703ECD

FP4000 sensor is a NO/NC, high power, ferrous proximity sensor with max. .25" air gap.
 cable: 12 inches, connector: Deutsch DTM04-4P



154482ECD

PS65 sensor is a normally closed, magnetic proximity sensor with max. .50" air gap.
 cable: 6 inches, connector: Deutsch DTM04-2P



01143ECD



A magnet target compatible with PS65
 thread: 1/4"-20 UNC



Linear Sensors

01710ECD


ADS50 sensor is a 25mm [1.0"] travel, lever actuated, 0.5-4.5Vdc linear output, non-contact, analog sensor. Supply: 5V, cable: 12 inches, connector: Deutsch DTM04-3P



Rotary Sensors


01705ECD

RF50 rotary friction sensor is a 0.5-4.5Vdc output, Ø1/4" shaft, non-contact, friction lock rotary control. Supply: 5V, cable: 12 inches, connector: Deutsch DTM04-3P



153880ECD

RF55 rotary friction sensor is a 0.5-4.5Vdc output, Ø1/4" shaft, non-contact, 90° friction lock rotary control. Supply: 12V, cable: 12 inches, connector: Deutsch DTM04-3P





153881ECD

RF55 rotary friction sensor is a 0.5-4.5Vdc dual output, plastic body, Ø1/4" shaft, non-contact, 3 detent, rotary control. Supply: 5V, cable: 12 inches, connector: Deutsch DTM04-6P




153882ECD

RF55 rotary friction sensor is a 0.5-4.5Vdc output, Ø1/4" shaft, non-contact, 360° continuous rotary control. Supply: 5V, cable: 12 inches, connector: Deutsch DTM04-3P



01707ECD

RS70 rotary sensor is a 0.5-4.5Vdc, dual output, 5/16" hex coupling, non-contact, 170° rotary sensor. Supply: 5V, cable: 12 inches, connector: Deutsch DTM04-6P

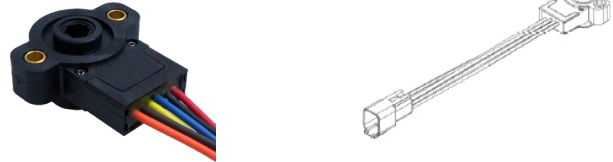


141453ECD

RS70 rotary sensor is a 0.5-4.5Vdc, dual output, 5/16" hex coupling, non-contact, 100° rotary sensor. Supply: 5V, cable: 12 inches, connector: Deutsch DTM04-6P




01708ECD

RS60 rotary sensor is a 0.5-4.5Vdc, dual output, Ø7/8" through hole coupling, non-contact, 120° rotary sensor. Supply: 5V, cable: 12 inches, connector: Deutsch DTM04-6P

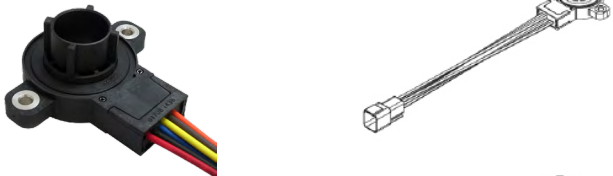


01709ECD

RS52 rotary sensor is a 0.5-4.5Vdc, single output, non-contact, 90° rotary sensor. Supply: 5V, cable: 12 inches, connector: Deutsch DTM04-3P

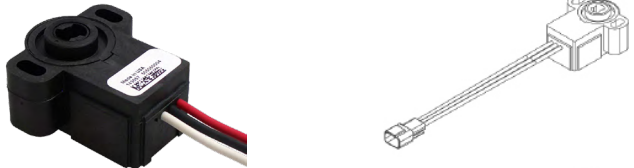

01825ECD

RS53 rotary sensor is a 0.5-4.5Vdc, single output, non-contact, 360° continuous rotary sensor. Supply: 5V, cable: 6 inches, connector: Deutsch DTM04-3P

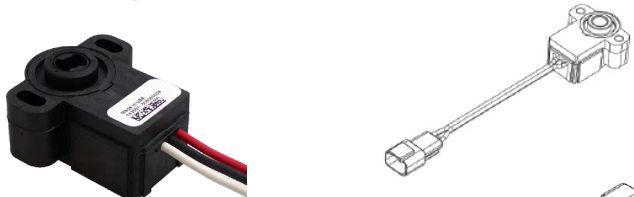

Speed Sensors

01711ECD

GS50 geartooth sensor is a digital output, noncontact, flange mount, ferrous sensor. cable: 12 inches, connector: Deutsch DTM04-3P




01712ECD

GS60 geartooth sensor is a digital output, noncontact, threaded barrel mount, ferrous sensor. cable: 12 inches, connector: Deutsch DTM04-3P



154877ECD

GS70 geartooth sensor is a digital output, noncontact, threaded mount, ferrous sensor. cable: 6 inches, connector: Deutsch DT04-3P

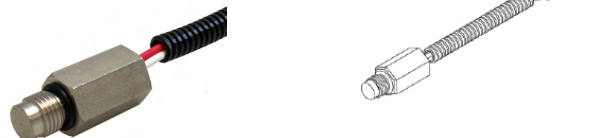




Force Sensors

168607


CDS-125 is a compact 1.25" diameter force sensor, 5VDC (+/- 10%), 1500 lbf full scale load, cable: 50 inches, connector: Duetsch DTM04-3P



Tilt Sensors


01715ECD

RM50 rolling magnet switch is a one axis tilt switch. sensitivity: ±10 degrees cable: 12 inches, connector: Deutsch DTM04-2P




01716ECD

ATS90 dual axis sensor is a two axis, 0.5-4.5Vdc, non-contact, Hall effect angle/tilt sensor. Supply: 12V, range: ±10 degrees each axis, cable: 12 inches, connector: Deutsch DTM04-4P



169453ECD

UTS universal tilt sensor is a two axis, CANbus (J1939), non-contact, MEMS angle/tilt sensor. Supply: 5.25 to 48 Vdc, range: ±90 degrees each axis, connector: Deutsch DTM04-4P




169451ECD is 3 axis version of above.

169459ECD is a ±10 degrees each axis version of above.


163161ECD

UTS-G universal tilt sensor gyroscopic is a three axis, CANbus (J1939), non-contact, MEMS angle/tilt sensor. Supply: 6 to 36 Vdc, range: ±90 degrees each axis, connector: Deutsch DTM04-4P



167427ECD


UTS-ID universal tilt sensor with impact detection, is a three axis, CANbus (J1939), non-contact, MEMS angle/tilt sensor. Supply: 5.25 to 48 Vdc, Max impact rate: ±16 g connector: Deutsch DT06-4S



Acceleration/Tilt Sensors


01767ECD

ACC50 acceleration sensor is a 1.2-3.8 Vdc output accelerometer used to sense vibration, impact, tilt and motion. Supply: 5V, sensitivity: ±1.5G, cable: 12 inches, connector: Deutsch DTM04-3P



158904ECD

ACC100 acceleration sensor is a 2.103-3.132 Vdc dual output accelerometer used to sense tilt and motion. Supply: 5V, sensitivity: ±40°, cable: 12 inches, connector: Deutsch DTM04-6P





Tools

5031061

Medium duty service kit
 contents: 3 crimping tools
 1 5031057 pin box
 1 5035003 extractor set
crimping tools not sold separately



5031057

Pin box kit
 contents: AMP/Tyco pins and seals
 AMP parts not sold separately



5035003

Set of 3 extraction tools, stamped
 contents: 1 JPT extractor (yellow)
 1 MT extractor (blue)
 1 pin extractor (red)
stamped tools not sold separately



161116

Extraction tool, hardened alloy
 contents: 1 MT extractor




161117

Extraction tool, hardened alloy
 contents: 1 JPT extractor



Prototype Installation Kits
5030094

C1-cable, with seals
 length: 2,5 meters
 use with: IQAN-LST, -LSL (-S)




5030127

C1-cable, Deutsch DTM
 length: 2,5 meters
 use with: IQAN-LC5



20077763


C1&C2-cables, MicroFit 3.0
 length: 2,5 meters
 use with: IQAN-LC6



Connector Kits


5031086

C1-connector, 3 position
 use with: IQAN-SP, -ST (-B)




5031097

C1-connector, 4 position
 use with: IQAN-LST, -LSL (-S)




20072408

C1-connector, DTM 6 position
 including 6 sealing pins
 use with: IQAN-LC5




20077764

C1&C2-connector, MicroFit 3.0
 use with: IQAN-LC6




01786ECD (same as 5035010)

DTM connector, 2 position
 use with: sensors




01787ECD (same as 5035011)

DTM connector, 3 position
 use with: sensors




01788ECD

DTM connector, 4 position
 use with: sensors



01789ECD

DTM connector, 6 position
 does not include sealing pins
 use with: sensors



TGSS

The True Ground Speed Sensor (TGSS) determines ground speed using Doppler beam technology, and reports the information using a frequency signal.



0740059ECD

TGSS-A, 9V-16V, 0.3-44 MPH, AMP Superseal 3 pos.

0740078ECD

TGSS-A-UK, same as above, with frequency for UK

0740051ECD

TGSS-D, 9V-16V, 0.3-44 MPH, with sensor present signal, DT04-4P

0740072ECD

TGSS-D-UK, same as above, with frequency for UK

Offer of Sale

The goods, services or work (referred to as the "Products") offered by Parker-Hannifin Corporation, its subsidiaries, groups, divisions, and authorized distributors ("Seller") are offered for sale at prices indicated in the offer, or as may be established by Seller. The offer to sell the Products and acceptance of Seller's offer by any customer ("Buyer") is contingent upon, and will be governed by all of the terms and conditions contained in this Offer of Sale. Buyer's order for any Products specified in Buyer's purchase document or Seller's offer, proposal or quote ("Quote") attached to the purchase order, when communicated to Seller verbally, or in writing, shall constitute acceptance of this offer.

1. **Terms and Conditions.** Seller's willingness to offer Products for sale or accept an order for Products is subject to the terms and conditions contained in this Offer of Sale or any newer version of the same, published by Seller electronically at www.parker.com/saleterms/. Seller objects to any contrary or additional terms or conditions of Buyer's order or any other document or other communication issued by Buyer.

2. **Price; Payment.** Prices stated on Seller's Quote are valid for thirty (30) days, except as explicitly otherwise stated therein, and do not include any sales, use, or other taxes or duties unless specifically stated. Seller reserves the right to modify prices to adjust for any raw material price fluctuations. Unless otherwise specified by Seller, all prices are F.C.A. Seller's facility (INCOTERMS 2010). Payment is subject to credit approval and payment for all purchases is due thirty (30) days from the date of invoice (or such date as may be specified by Seller's Credit Department). Unpaid invoices beyond the specified payment date incur interest at the rate of 1.5% per month or the maximum allowable rate under applicable law.

3. **Shipment; Delivery; Title and Risk of Loss.** All delivery dates are approximate. Seller is not responsible for damages resulting from any delay. Regardless of the manner of shipment, delivery occurs and title and risk of loss or damage pass to Buyer, upon placement of the Products with the shipment carrier at Seller's facility. Unless otherwise stated, Seller may exercise its judgment in choosing the carrier and means of delivery. No deferral of shipment at Buyers' request beyond the respective dates indicated will be made except on terms that will indemnify, defend and hold Seller harmless against all loss and additional expense. Buyer shall be responsible for any additional shipping charges incurred by Seller due to Buyer's acts or omissions.

4. **Warranty.** Seller warrants that the Products sold hereunder shall be free from defects in material or workmanship for a period of twelve (12) months from the date of delivery or 2,000 hours of normal use, whichever occurs first. All prices are based upon the exclusive limited warranty stated above, and upon the following disclaimer: **DISCLAIMER OF WARRANTY: THIS WARRANTY IS THE SOLE AND ENTIRE WARRANTY PERTAINING TO PRODUCTS PROVIDED. SELLER DISCLAIMS ALL OTHER WARRANTIES, EXPRESS AND IMPLIED, INCLUDING DESIGN, MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.**

5. **Claims; Commencement of Actions.** Buyer shall promptly inspect all Products upon receipt. No claims for shortages will be allowed unless reported to the Seller within ten (10) days of delivery. No other claims against Seller will be allowed unless asserted in writing within thirty (30) days after delivery. Buyer shall notify Seller of any alleged breach of warranty within thirty (30) days after the date the defect is or should have been discovered by Buyer. Any claim or action against Seller based upon breach of contract or any other theory, including tort, negligence, or otherwise must be commenced within twelve (12) months from the date of the alleged breach or other alleged event, without regard to the date of discovery.

6. **LIMITATION OF LIABILITY.** IN THE EVENT OF A BREACH OF WARRANTY, SELLER WILL, AT ITS OPTION, REPAIR OR REPLACE A DEFECTIVE PRODUCT, OR REFUND THE PURCHASE PRICE WITHIN A REASONABLE PERIOD OF TIME. IN NO EVENT IS SELLER LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF, OR AS THE RESULT OF, THE SALE, DELIVERY, NON-DELIVERY, SERVICING, USE OR LOSS OF USE OF THE PRODUCTS OR ANY PART THEREOF, OR FOR ANY CHARGES OR EXPENSES OF ANY NATURE INCURRED WITHOUT SELLER'S WRITTEN CONSENT, WHETHER BASED IN CONTRACT, TORT OR OTHER LEGAL THEORY. IN NO EVENT SHALL SELLER'S LIABILITY UNDER ANY CLAIM MADE BY BUYER EXCEED THE PURCHASE PRICE OF THE PRODUCTS.

7. **User Responsibility.** The user, through its own analysis and testing, is solely responsible for making the final selection of the system and Product and assuring that all performance, endurance, maintenance, safety and warning requirements of the application are met. The user must analyze all aspects of the application and follow applicable industry standards and Product information. If Seller provides Product or system options based upon data or specifications provided by the user, the user is responsible for determining that such data and specifications are suitable and sufficient for all applications and reasonably foreseeable uses of the Products or systems.

8. **Loss to Buyer's Property.** Any designs, tools, patterns, materials, drawings, confidential information or equipment furnished by Buyer or any other items which become Buyer's property, will be considered obsolete and may be destroyed by Seller after two (2) consecutive years have elapsed without Buyer ordering the items manufactured using such property. Seller shall not be responsible for any loss or damage to such property while it is in Seller's possession or control.

9. **Special Tooling.** A tooling charge may be imposed for any special tooling, including without limitation, dies, fixtures, molds and patterns, acquired to manufacture Products. Such special tooling shall be and remain Seller's property notwithstanding payment of any charges by Buyer. In no event will Buyer acquire any interest in apparatus belonging to Seller which is utilized in the manufacture of the Products, even if such apparatus has been specially converted or adapted for such manufacture and notwithstanding any charges paid by Buyer. Unless otherwise agreed, Seller has the right to alter, discard or otherwise dispose of any special tooling or other property in its sole discretion at any time.

10. **Buyer's Obligation; Rights of Seller.** To secure payment of all sums due or otherwise, Seller retains a security interest in all Products delivered to Buyer and this agreement is deemed to be a Security Agreement under the Uniform Commercial Code. Buyer authorizes Seller as its attorney to execute and file on Buyer's behalf all documents Seller deems necessary to perfect its security interest.

11. **Improper Use and Indemnity.** Buyer shall indemnify, defend, and hold Seller harmless from any losses, claims, liabilities, damages, lawsuits, judgments and costs (including attorney fees and defense costs), whether for personal injury, property damage, patent, trademark or copyright

infringement or any other claim, brought by or incurred by Buyer, Buyer's employees, or any other person, arising out of: (a) improper selection, application, design, specification or other misuse of Products purchased by Buyer from Seller; (b) any act or omission, negligent or otherwise, of Buyer; (c) Seller's use of patterns, plans, drawings, or specifications furnished by Buyer to manufacture Products; or (d) Buyer's failure to comply with these terms and conditions. Seller shall not indemnify Buyer under any circumstance except as otherwise provided.

12. **Cancellations and Changes.** Buyer may not cancel or modify or cancel any order for any reason, except with Seller's written consent and upon terms that will indemnify, defend and hold Seller harmless against all direct, incidental and consequential loss or damage. Seller may change Product features, specifications, designs and availability.

13. **Limitation on Assignment.** Buyer may not assign its rights or obligations under this agreement without the prior written consent of Seller.

14. **Force Majeure.** Seller does not assume the risk and is not liable for delay or failure to perform any of Seller's obligations by reason of events or circumstances beyond its reasonable control (hereinafter "Events of Force Majeure"). Events of Force Majeure shall include without limitation: accidents, strikes or labor disputes, acts of any government or government agency, acts of nature, delays or failures in delivery from carriers or suppliers, shortages of materials, or any other cause beyond Seller's reasonable control.

15. **Waiver and Severability.** Failure to enforce any provision of this agreement will not invalidate that provision; nor will any such failure prejudice Seller's right to enforce that provision in the future. Invalidation of any provision of this agreement by legislation or other rule of law shall not invalidate any other provision herein. The remaining provisions of this agreement will remain in full force and effect.

16. **Termination.** Seller may terminate this agreement for any reason and at any time by giving Buyer thirty (30) days prior written notice. Seller may immediately terminate this agreement, in writing, if Buyer: (a) breaches any provision of this agreement (b) appoints a trustee, receiver or custodian for all or any part of Buyer's property (c) files a petition for relief in bankruptcy on its own behalf, or one if filed by a third party (d) makes an assignment for the benefit of creditors; or (e) dissolves its business or liquidates all or a majority of its assets.

17. **Governing Law.** This agreement and the sale and delivery of all Products are deemed to have taken place in, and shall be governed and construed in accordance with, the laws of the State of Ohio, as applicable to contracts executed and wholly performed therein and without regard to conflicts of laws principles. Buyer irrevocably agrees and consents to the exclusive jurisdiction and venue of the courts of Cuyahoga County, Ohio with respect to any dispute, controversy or claim arising out of or relating to this agreement.

18. **Indemnity for Infringement of Intellectual Property Rights.** Seller is not liable for infringement of any patents, trademarks, copyrights, trade dress, trade secrets or similar rights except as provided in this Section. Seller will defend and indemnify Buyer against allegations of infringement of U.S. patents, U.S. trademarks, copyrights, trade dress and trade secrets ("Intellectual Property Rights"). Seller will defend at its expense and will pay the cost of any settlement or damages awarded in an action brought against Buyer based on an allegation that a Product sold pursuant to this agreement infringes the Intellectual Property Rights of a third party. Seller's obligation to defend and indemnify Buyer is contingent on Buyer notifying Seller within ten (10) days after Buyer becomes aware of such allegations of infringement, and Seller having sole control over the defense of any allegations or actions including all negotiations for settlement or compromise. If a Product is subject to a claim that it infringes the Intellectual Property Rights of a third party, Seller may, at its sole expense and option, procure for Buyer the right to continue using the Product, replace or modify the Product so as to make it noninfringing, or offer to accept return of the Product and refund the purchase price less a reasonable allowance for depreciation. Notwithstanding the foregoing, Seller is not liable for claims of infringement based on information provided by Buyer, or directed to Products delivered hereunder for which the designs are specified in whole or part by Buyer, or infringements resulting from the modification, combination or use in a system of any Product sold hereunder. The foregoing provisions of this Section constitute Seller's sole and exclusive liability and Buyer's sole and exclusive remedy for infringement of Intellectual Property Rights.

19. **Entire Agreement.** This agreement contains the entire agreement between the Buyer and Seller and constitutes the final, complete and exclusive expression of the terms of sale. All prior or contemporaneous written or oral agreements or negotiations with respect to the subject matter are herein merged. The terms contained herein may not be modified unless in writing and signed by an authorized representative of Seller.

20. **Compliance with Laws.** Buyer agrees to comply with all applicable laws, regulations, and industry and professional standards of care, including those of the United Kingdom, the United States of America, and the country or countries in which Buyer may operate, including without limitation the U. K. Bribery Act, the U.S. Foreign Corrupt Practices Act ("FCPA"), the U.S. Anti-Kickback Act ("Anti-Kickback Act") and the U.S. Food Drug and Cosmetic Act ("FDCA"), each as currently amended, and the rules and regulations promulgated by the U.S. Food and Drug Administration ("FDA"), and agrees to indemnify and hold harmless Seller from the consequences of any violation of such provisions by Buyer, its employees or agents. Buyer acknowledges that it is familiar with the provisions of the U. K. Bribery Act, the FCPA, the FDA, and the Anti-Kickback Act, and certifies that Buyer will adhere to the requirements thereof. In particular, Buyer represents and agrees that Buyer will not make any payment or give anything of value, directly or indirectly to any governmental official, any foreign political party or official thereof, any candidate for foreign political office, or any commercial entity or person, for the purpose of influencing such person to purchase Products or otherwise benefit the business of Seller.

Parker Hydraulics International Sales Offices

North America

Hydraulics Group Headquarters

6035 Parkland Boulevard
Cleveland, OH 44124-4141 USA
Tel: 216-896-3000
Fax: 216-896-4031

Parker Canada Division

160 Chisholm Drive Milton
Ontario Canada L9T 3G9
Tel: 905-693-3000
Fax: 905-876-1958

Parker Hannifin de México

Industrial Hydraulic Sales
Eje Uno Norte No.100
Parque Industrial Toluca 2000
Toluca, Edo, de Mexico CP 50100
Tel: 52 722 275 4200
Fax: 52 722 279 9308

Parker Hannifin de México

Mobile Hydraulic Sales
Via de FFCC a Matamoraos 730
Apodaca, NL, de Mexico CP 66600
Tel: 52 81 8156 6000
Fax: 52 81 8156 6068

Europe

Hydraulics Group Headquarters

La Tuilière 6
1163 Etoy - Switzerland
Tel: 41 21 821 8500
Fax: 41 21 821 8580

South Africa

Parker Hannifin Africa Pty Ltd

P.O. Box 1153
ZA-Kempton Park 1620,
Republic of South Africa
Tel: 27 11 961 0700
Fax: 27 11 392 7213

Mobile Sales

Mobile Sales Organization and Global Sales

850 Arthur Avenue
Elk Grove Village, IL 60007 USA
Tel: 847-258-6200
Fax: 847-258-6299

Industrial Sales

Central Region

1042 Maple Avenue
Unit 331
Lisle, IL 60532 USA
Tel: 630-964-0796

Great Lakes Region

6035 Parkland Boulevard Cleve-
land, OH 44124-4141 USA Tel:
216-896-2740
Fax: 866-498-7507

Gulf Region

20002 Standing Cypress Drive
Spring, TX 77379 USA
Tel: 817-473-4431
Fax: 888-227-9454

Southwest Region

700 S. 4th Avenue
Mansfield, TX 76063 USA
Tel: 817-473-9341
Fax: 817-473-2680

Mid Atlantic and Southeast Regions

1225 Old Alpharetta Road Suite 290
Alpharetta, GA 30005 USA
Tel: 770-619-9767
Fax: 770-619-9806

Midwest Region

8145 Lewis Road
Minneapolis, MN 55427 USA Tel:
763-513-3535
Fax: 763-544-3418

Northeast Region

P.O. Box 396
Pine Brook, NJ 07058 USA
Tel: 973-227-2565
Fax: 973-227-2467

Northwest Region

6458 North Basin Avenue Portland,
OR 97217 USA
Tel: 503-283-1020
Fax: 866-611-7308

Pacific Region

8460 Kass Drive
Buena Park, CA 90621
Tel: 714-228-2510
Fax: 714-228-2511

Asia Pacific

Parker Hannifin Shanghai Ltd

280 Yunqiao Road,
Jin Qiao Export Processing Zone
Shanghai 201206, China
Tel: 86 21 2899 5000
Fax: 86 21 6445 9917

Parker Hannifin Hong Kong Ltd

8/F, Kin Yip Plaza
9 Cheung Yee Street
Cheung Sha Wan, Hong Kong
Tel: 852 2428 8008
Fax: 852 2425 6896

Parker Hannifin Korea Ltd

9F KAMCO Yangjae Tower
949-3 Dogok1-dong, Gangnam-gu
Seoul, 135-860, Korea
Tel: 82 2 559 0400
Fax: 82 2 556 8187

Parker Hannifin India Pvt Ltd

Plot No. EL-26, MIDC
TTC Industrial Area
Mahape, Navi Mumbai, 400 709
India Tel: 91 22 6513 7081
Fax: 91 22 2768 6841

Parker Hannifin Australia

Parker Hannifin Pty Ltd.
9 Carrington Road
Castle Hill, NSW 2154, Australia
Tel: 612 9634 7777
Fax: 612 9842 5111

Latin America

Parker Hannifin Ind. e Com. Ltda Hydraulics Division

Av. FredericoRitter, 1100
94930-000 Cachoeirinha RS, Brazil
Tel: 55 51 3470 6090
Fax: 55 51 3470 9281

Parker Hannifin Argentina S.A.I.C.

Stephenson 2711
1667-Tortuguitas-Malvinas Argentinas
Pcia. de Buenos Aires, Argentina
Tel: 54 3327 44 4129
Fax: 54 3327 44 4199

Pan American Division

7400 NW 19th Street, Suite A
Miami, FL 33126 USA
Tel: 305-470-8800
Fax: 305-470-8808

