



Model	Pipe Size	Height (H)	Width (W)	Depth (D)	Dryer Weight	DIM (a)	DIM (b)	DIM (c)	DIM (d)	VP (H)	VP (W)	VP (D)	VAC Pump Weight
MXLE 102C	2"	1647mm (64.8")	793.5mm (31.5")	550mm (21.7")	265kg (583lbs)	360.5mm (14.2")	1461mm (57.5")	500mm (19.7")	322mm (12.7")	355mm (13.8")	900mm (35.4")	531mm (20.9")	129kg (284lbs)
MXLE 103C	2"	1647mm (64.8")	962.5mm (37.9")	550mm (21.7")	346kg (761lbs)	360.5mm (14.2")	1461mm (57.5")	500mm (19.7")	491mm (19.3")	355mm (13.8")	900mm (35.4")	531mm (20.9")	129kg (284lbs)
MXLE 103	2"	1892mm (74.5")	962.5mm (37.9")	550mm (21.7")	385kg (847lbs)	360.5mm (14.2")	1706mm (67.2")	500mm (19.7")	491mm (19.3")	385mm (15.2")	998mm (39.3")	531mm (20.9")	163kg (359lbs)
MXLE 104	2.1/2"	1892mm (74.5")	1131.5mm (44.6")	550mm (21.7")	480kg (1056lbs)	360.5mm (14.2")	1706mm (67.2")	500mm (19.7")	660mm (26.0")	385mm (15.2")	1084mm (42.7")	531mm (20.9")	178kg (392lbs)
MXLE 105	2.1/2"	1892mm (74.5")	1300.5mm (51.2")	550mm (21.7")	573kg (1261lbs)	360.5mm (14.2")	1706mm (67.2")	500mm (19.7")	829mm (32.6")	385mm (15.2")	1084mm (42.7")	531mm (20.9")	178kg (392lbs)
MXLE 106	2.1/2"	1892mm (74.5")	1469.5mm (57.9")	550mm (21.7")	667kg (1467lbs)	360.5mm (14.2")	1706mm (67.2")	500mm (19.7")	998mm (39.3")	1185mm (46.7")	1100mm (43.3")	750mm (29.5")	361kg (796lbs)
MXLE 107	2.1/2"	1892mm (74.5")	1641.5mm (64.6")	550mm (21.7")	761kg (1674lbs)	360.5mm (14.2")	1706mm (67.2")	500mm (19.7")	1167mm (45.9")	1185mm (46.7")	1100mm (43.3")	750mm (29.5")	376kg (829lbs)
MXLE 108	2.1/2"	1892mm (74.5")	1807.5mm (71.2")	550mm (21.7")	855kg (1881lbs)	360.5mm (14.2")	1706mm (67.2")	500mm (19.7")	1336mm (52.6")	1185mm (46.7")	1100mm (43.3")	750mm (29.5")	391kg (826lbs)

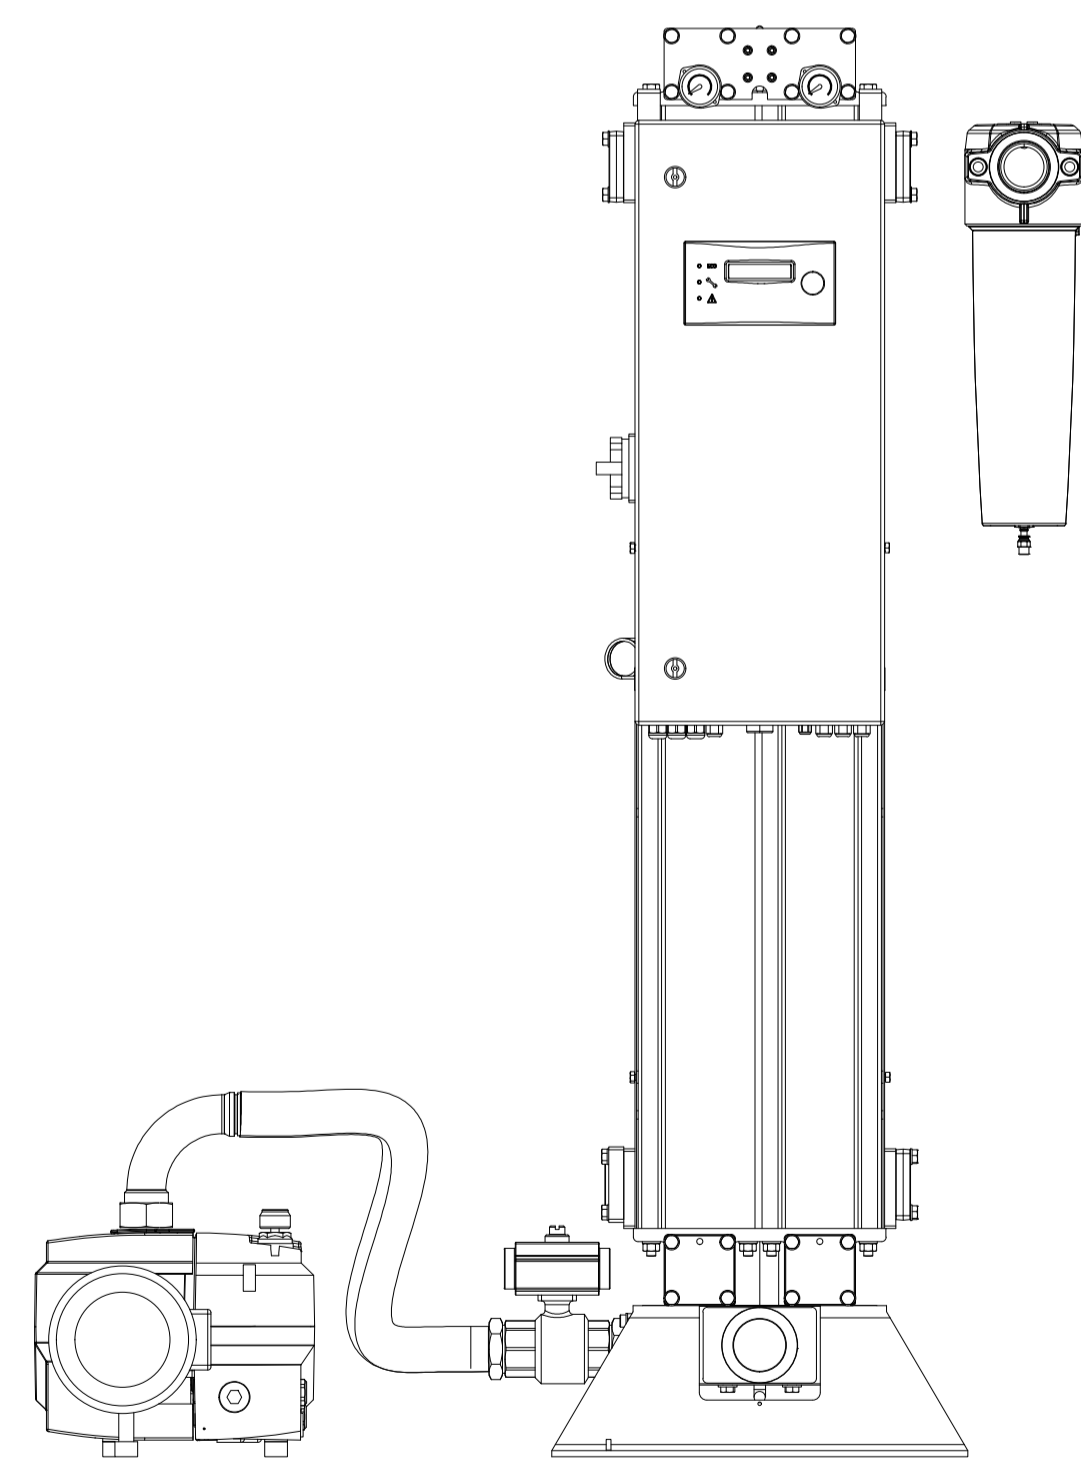

SINGLE VACUUM PUMP
102C - 105

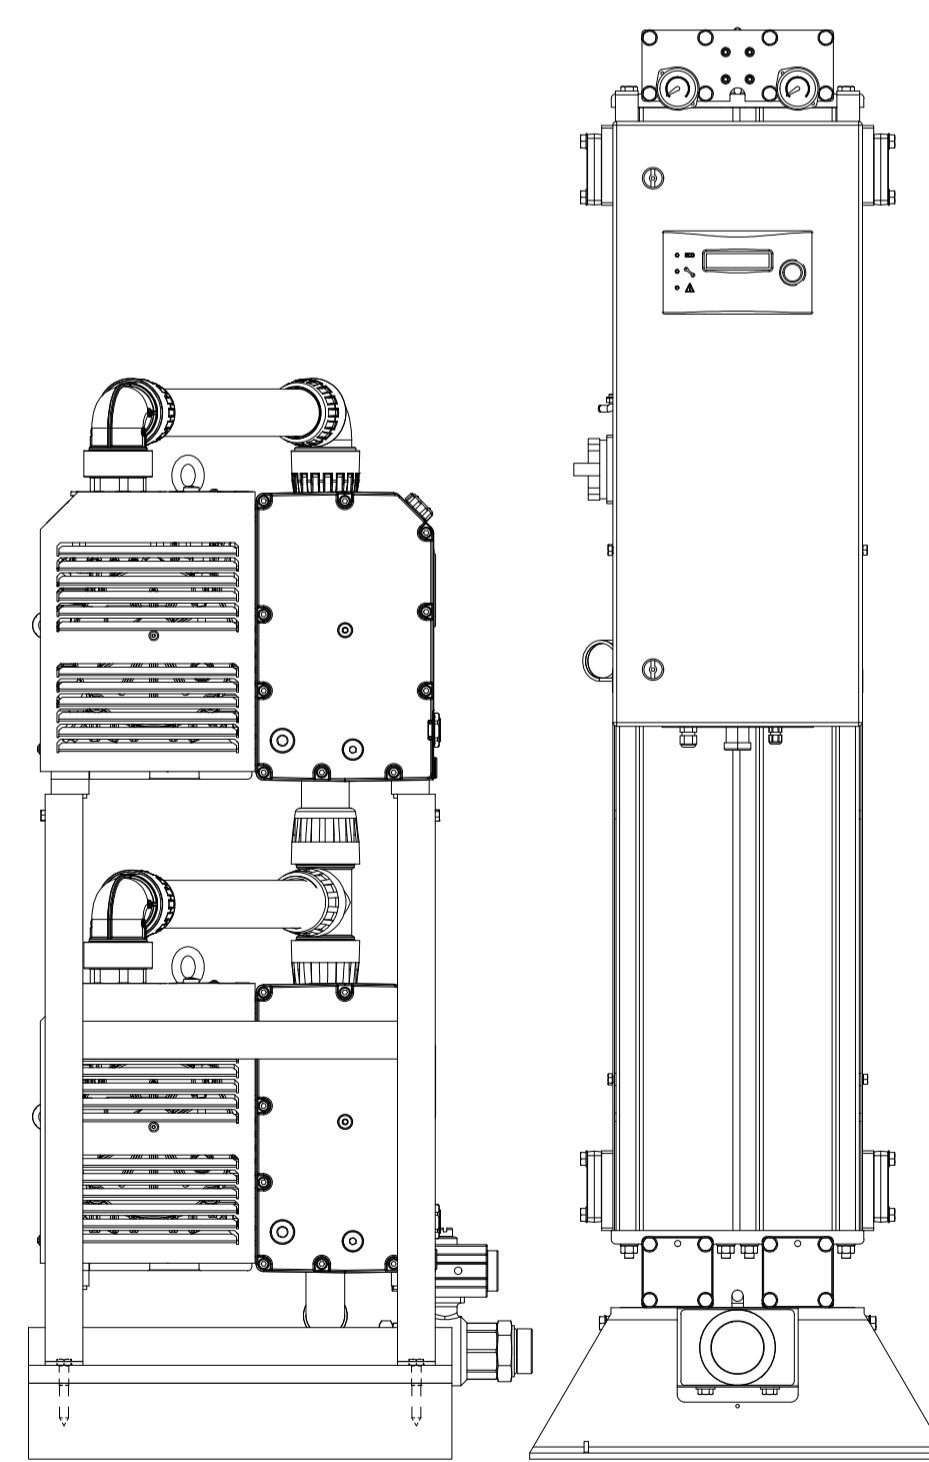

DUPLEX VACUUM PUMP
106 - 108

ECO No. 0306513 REV B

PLEASE CONSIDER THE ENVIRONMENT PRIOR TO PRINTING THIS DRAWING

DO NOT SCALE - IF IN DOUBT ASK

BASED ON BS 8888 DIMENSIONS IN MILLIMETRES

GENERAL TOLERANCES UNLESS OTHERWISE STATED

MACHINED DIMENSIONS
 XX ±0.13 UP TO 300 ±0.3
 X ±0.25 OVER 300 TO 600 ±0.5

POSITIONAL TOLERANCE
 PLAIN HOLES 00.13
 TAPPED HOLES 00.25
 CONCENTRICITY TOLERANCE 0.13 TIR

MACHINED SURFACES INDICATED THUS
 SURFACE TEXTURE TO BS 1134
 VALUES IN MICROMETRES

ANGLES ±1/2° (EXCEPT CHAMFERS)

METRIC THREADS TO BS 3643 MED. CLASS
 EXTERNAL G INTERNAL gH
 PIPE THREADS
 PRESSURE TIGHT TO BS 21

SHEET METALWORK & FABRICATIONS
 SHEET METALWORK DIMENSIONS
 UP TO 500 ±1.0
 OVER 500 TO 1000 ±1.5
 OVER 1000 ±1.5

FABRICATED PARTS DIMENSIONS
 UP TO 500 ±2
 OVER 500 TO 1000 ±4
 OVER 1000 ±6

POSITIONAL TOLERANCE FOR PLAIN & TAPPED HOLES
 UP TO 500 01.0
 OVER 500 02.0

Parker | **domnick hunter**

Parker Hannifin Manufacturing Ltd
 domnick hunter Filtration & Separation Division
 Dukeway, Team Valley
 Gateshead, Tyne & Wear
 England, NE11 0PZ
 TEL +44 (0)191 402 9000
 FAX +44 (0)191 482 6296
 www.parker.com/dhths

THIS DOCUMENT IS COPYRIGHT AND IS THE PROPERTY OF
 PARKER HANNIFIN LTD. IT MUST NOT BE COPIED IN
 WHOLE OR PART, USED FOR MANUFACTURE OF, OR
 OTHERWISE DISCLOSED WITHOUT PRIOR
 WRITTEN CONSENT OF THE COMPANY © 2011 A1

MATERIAL	SCALE		DRAWN	CHECKED	APPROVED	TITLE MXLE INSTALLATION DRAWING
GEN ARRGT.	1:9		NAME	KRS	SB	
			DATE	06/02/2013	19/02/2013	

DRG No.	SHEET
101-10281	2 / 2