


CABIN AIR FILTER


IDENTIFICATION / INSTALLATION

CHRYSLER

PA4159

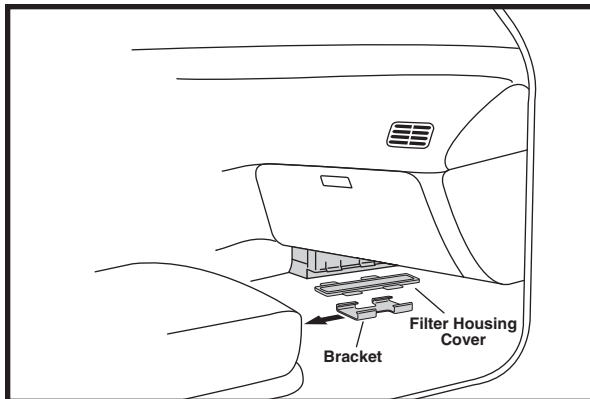

1. Open passenger side door.
2. Locate sliding bracket on filter housing cover located under glove compartment.
3. Slide bracket toward seat to remove both housing cover and bracket.

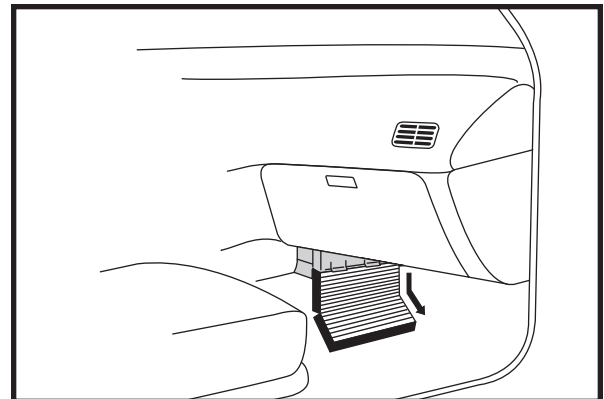

4. Pull filter down and bend at folding point to remove.
5. Replace filter and reassemble.

Notice: The information provided is based on the latest authoritative information available at press time. However, due to manufacturers' changes, and year and model variations, Baldwin Filters cannot be responsible for misapplications and instruction errors.

BALDWIN FILTERS® **BALDWIN**
a CLARCOR company

4400 East Highway 30 ■ P.O. Box 6010
Kearney, Nebraska 68848-6010
Phone: (308) 234-1951 ■ Toll Free: (800) 822-5394
Fax: (800) 828-4453 ■ Int'l Fax: (308) 237-9769
Internet: www.baldwinfilter.com