


CABIN AIR FILTER


IDENTIFICATION / INSTALLATION

IMPORTS


PA4195 KIT

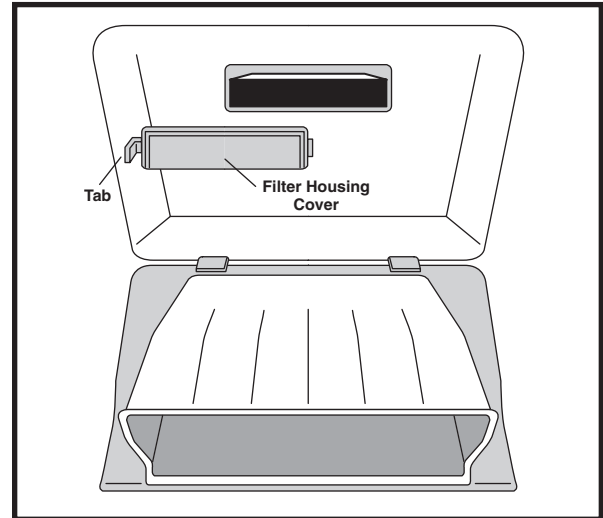

6. Flip down glove compartment.
7. Remove filter housing cover by squeezing tab on left side.

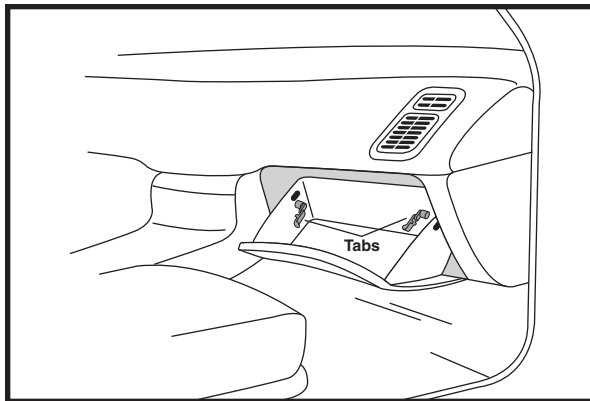

1. Open passenger side door.
2. Open glove compartment.
3. Close glove compartment part way to relieve pressure on tabs.
4. Push in tabs on outside of glove compartment to release glove compartment.
5. Remove tabs.

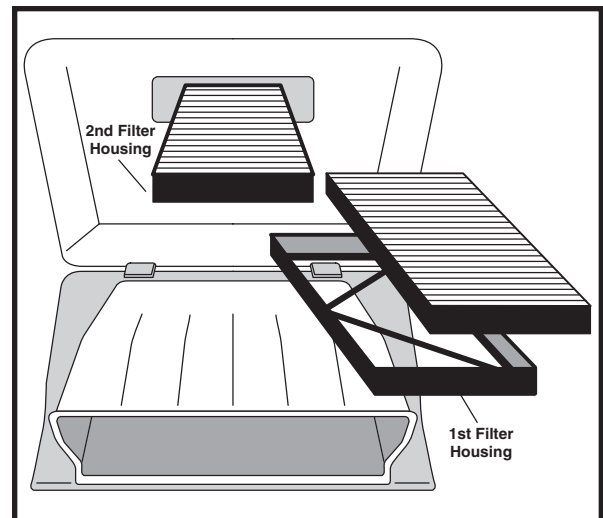

8. Remove first filter and filter housing.
9. Slide second filter and filter housing to the left and then out.
10. Remove filters from filter housings.
11. Replace filters and filter housings in reverse order and reassemble.

Notice: The information provided is based on the latest authoritative information available at press time. However, due to manufacturers' changes, and year and model variations, Baldwin Filters cannot be responsible for misapplications and instruction errors.

BALDWIN FILTERS® **BALDWIN**
a CLARCOR company

4400 East Highway 30 ■ P.O. Box 6010
Kearney, Nebraska 68848-6010
Phone: (308) 234-1951 ■ Toll Free: (800) 822-5394
Fax: (800) 828-4453 ■ Int'l Fax: (308) 237-9769
Internet: www.baldwinfilter.com