
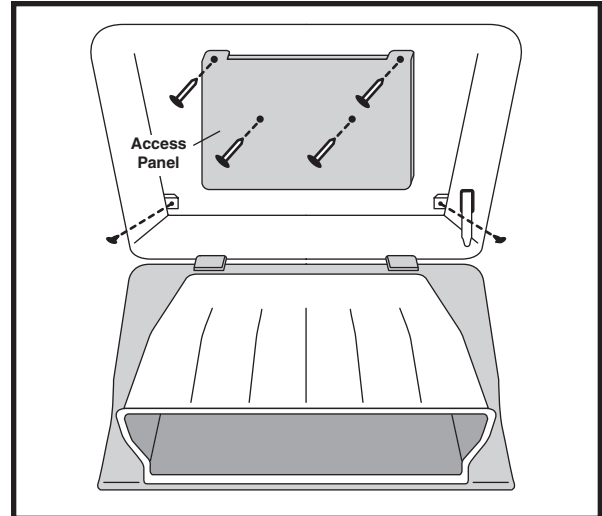


CABIN AIR FILTER


IDENTIFICATION / INSTALLATION

IMPORTS


PA4196

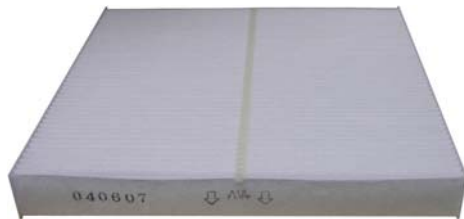

5. Remove screws on left and right sides (if equipped) while holding glove compartment.
6. Flip down glove compartment.
If vehicle has an access panel:
 - a. Remove clips at top of access panel.
 - b. Remove screws in middle of access panel (if equipped).
 - c. Remove access panel.

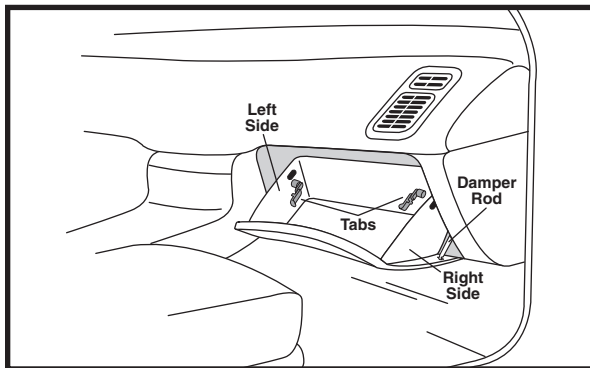

1. Open passenger side door.
2. Open glove compartment.
3. Detach damper rod from glove compartment.
4. Push in on left and right sides of glove compartment to release glove compartment.
If equipped with tabs:
 - a. Close glove compartment part way to relieve pressure on tabs.
 - b. Push in tabs on outside of glove compartment to release glove compartment.
 - c. Remove tabs.

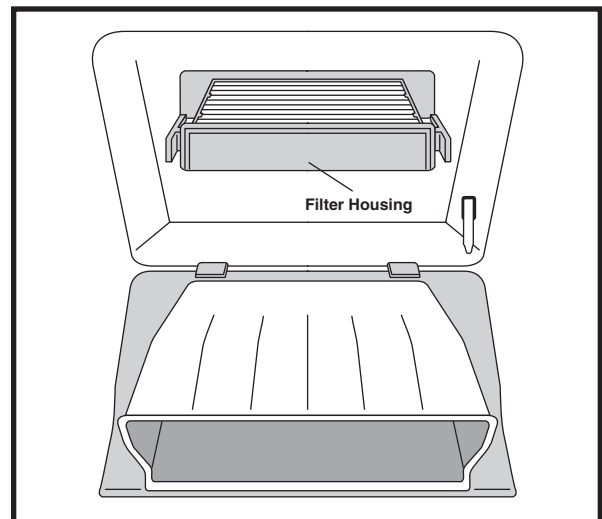

7. Remove filter housing.
8. Remove filter from filter housing.
9. Replace filter and reassemble.

Notice: The information provided is based on the latest authoritative information available at press time. However, due to manufacturers' changes, and year and model variations, Baldwin Filters cannot be responsible for misapplications and instruction errors.

BALDWIN FILTERS® **BALDWIN**
a CLARCOR company

4400 East Highway 30 ■ P.O. Box 6010
Kearney, Nebraska 68848-6010
Phone: (308) 234-1951 ■ Toll Free: (800) 822-5394
Fax: (800) 828-4453 ■ Int'l Fax: (308) 237-9769
Internet: www.baldwinfilter.com