


# CABIN AIR FILTER


## IDENTIFICATION / INSTALLATION

**GM**

**PA4340**

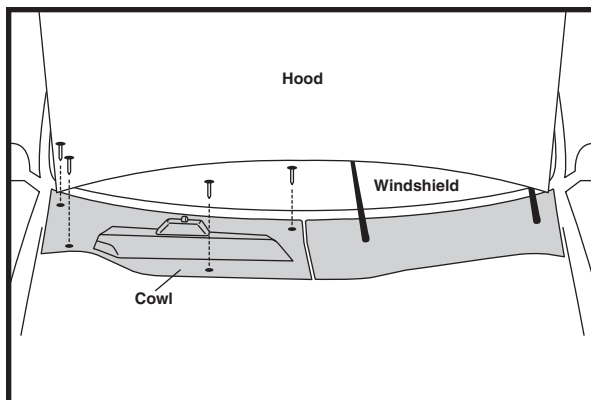

1. Place windshield wipers in upright position.
2. Open hood.
3. Remove push pins from passenger side of cowl.

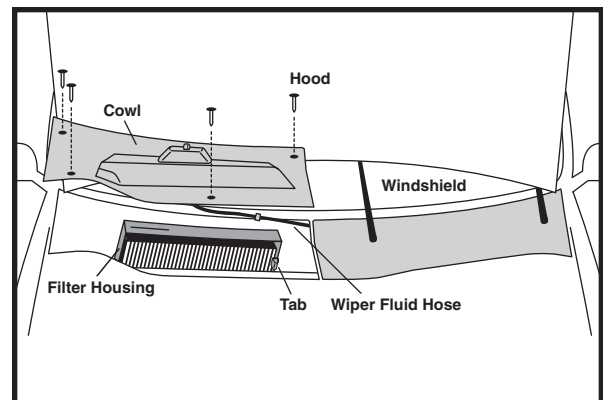

4. Remove passenger side of cowl. (Cowl remains attached to wiper fluid hose.)
5. Pull tab away from filter.
6. Replace filter and reassemble.

**Notice:** The information provided is based on the latest authoritative information available at press time. However, due to manufacturers' changes, and year and model variations, Baldwin Filters cannot be responsible for misapplications and instruction errors.

**BALDWIN FILTERS**<sup>®</sup> **BALDWIN**  
a CLARCOR company

4400 East Highway 30 ■ P.O. Box 6010  
Kearney, Nebraska 68848-6010  
Phone: (308) 234-1951 ■ Toll Free: (800) 822-5394  
Fax: (800) 828-4453 ■ Int'l Fax: (308) 237-9769  
Internet: [www.baldwinfilter.com](http://www.baldwinfilter.com)