


# CABIN AIR FILTER


## IDENTIFICATION / INSTALLATION

# IMPORTS


# PA4403

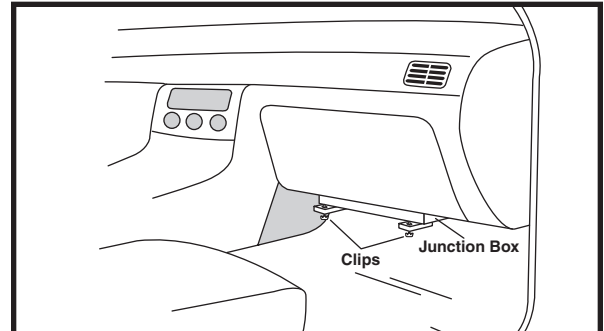


6. Unscrew clips and remove all connectors to junction box.
7. Remove junction box.

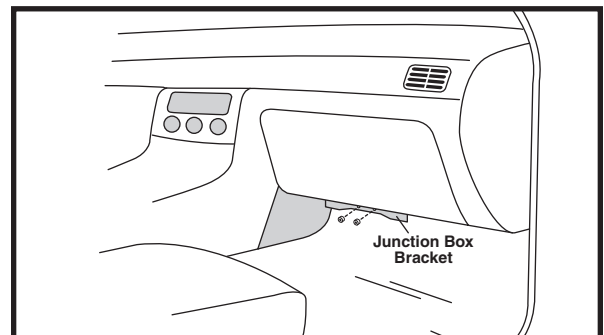

8. Remove nuts from junction box bracket.
9. Remove junction box bracket.

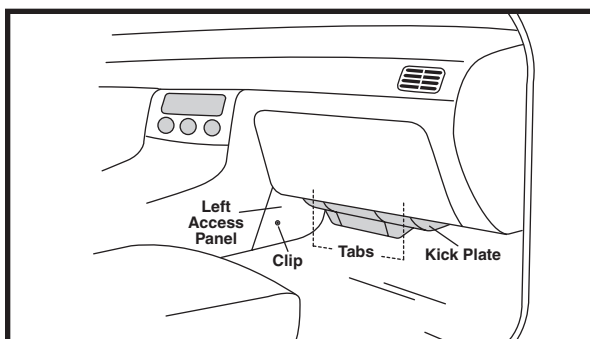

1. Open passenger side door.
2. Push tabs to release kick plate located under glove compartment.
3. Remove kick plate.
4. Remove clip on left access panel.
5. Remove left access panel.

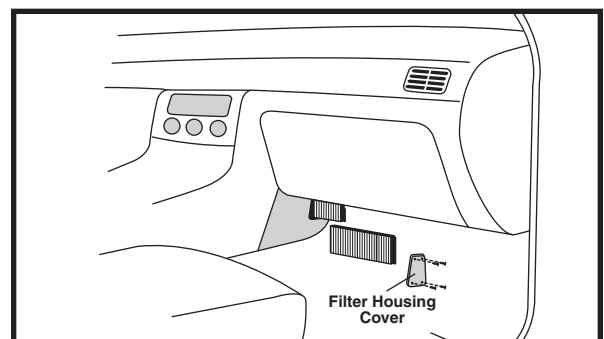

10. Remove screws from filter housing cover and unplug connector.
11. Remove filter housing cover.
12. Remove first filter.
13. Slide second filter down and then out.
14. Replace filters in reverse order and reassemble.

**Notice:** The information provided is based on the latest authoritative information available at press time. However, due to manufacturers' changes, and year and model variations, Baldwin Filters cannot be responsible for misapplications and instruction errors.

**BALDWIN FILTERS®** **BALDWIN**  
a CLARCOR company

4400 East Highway 30 ■ P.O. Box 6010  
Kearney, Nebraska 68848-6010  
Phone: (308) 234-1951 ■ Toll Free: (800) 822-5394  
Fax: (800) 828-4453 ■ Int'l Fax: (308) 237-9769  
Internet: [www.baldwinfilter.com](http://www.baldwinfilter.com)