


# CABIN AIR FILTER


## IDENTIFICATION / INSTALLATION

### IMPORTS


### PA4416 KIT

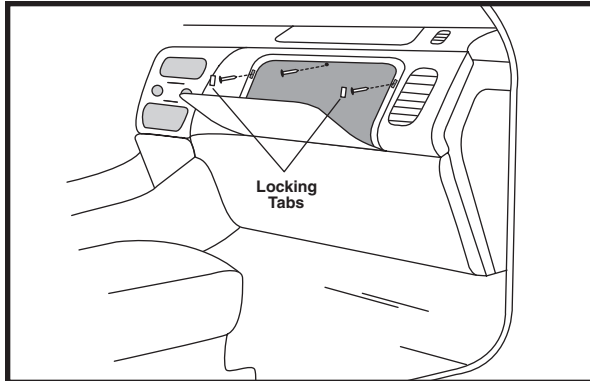


1. Open passenger side door.
2. Open glove compartment.
3. Remove square locking tabs from either side of glove compartment opening.
4. Remove screws on left, center and right of glove compartment opening.

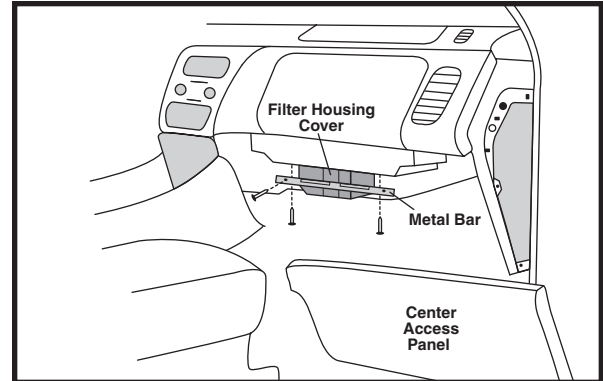

10. Remove center access panel under glove compartment.
11. Remove two screws under glove compartment and one screw on metal bar.

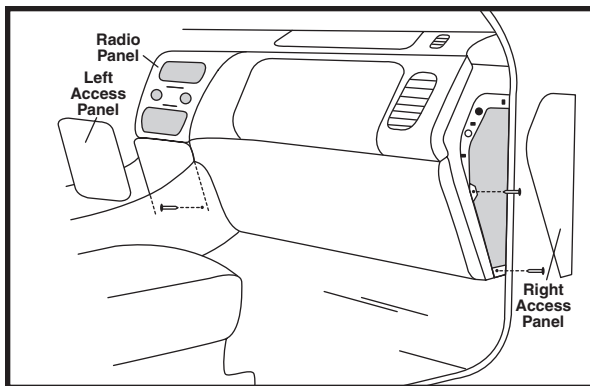

5. Close glove compartment.
6. Remove right access panel on right side of glove compartment.
7. Remove screws under right access panel.
8. Remove left access panel (under radio panel) on left side of glove compartment.
9. Remove screw on right side under left access panel.

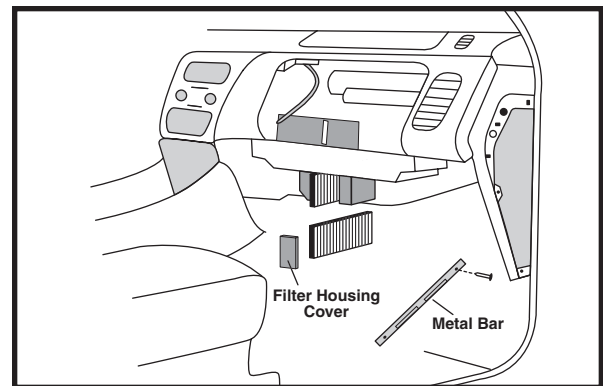

12. Remove glove compartment and disconnect light wire on left side.
13. Remove remaining screw on metal bar and remove metal bar.
14. Remove filter housing cover.
15. Pull out first filter. Slide second filter into opening, then remove.
16. Replace filters in reverse order and reassemble.

**Notice:** The information provided is based on the latest authoritative information available at press time. However, due to manufacturers' changes, and year and model variations, Baldwin Filters cannot be responsible for misapplications and instruction errors.

**BALDWIN FILTERS®** **BALDWIN**  
a CLARCOR company

4400 East Highway 30 ■ P.O. Box 6010  
Kearney, Nebraska 68848-6010  
Phone: (308) 234-1951 ■ Toll Free: (800) 822-5394  
Fax: (800) 828-4453 ■ Int'l Fax: (308) 237-9769  
Internet: [www.baldwinfilter.com](http://www.baldwinfilter.com)