



Interchange Element Data Sheet

Data sheet created using the Parker Par Fit Toolkit software.

 Creation Date:
 03/08/2018


 Datasheet No:
 DS1517W

 Parker Part No:
 939964Q

 OEM:
 Pall

 OEM Part No:
 HC9104FKP13H

Product Dimensions			
A (mm)	71.0	(inch)	2.80
B (mm)	41.0	(inch)	1.61
D (mm)	71	(inch)	2.80
E (mm)	327.0	(inch)	12.87
G (mm)	48.0	(inch)	1.89
H (mm)	17.5	(inch)	0.69

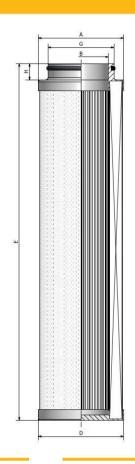



Construction Materials

Seal(s):	FPM: Fluoroelastomer	
Top Endcap:	Glass reinforced nylon	
Bottom Endcap:	Glass reinforced nylon	
Filter Media:	Multilayer fibreglass with coated mesh on both sides	

Calculated Performance Criteria

 Differential Pressure (Δp):
 0.51 bar @ 200 l/min

 Tested to ISO3968 @ 32 cSt
 7.40 psi @ 43.99 gpm

Efficiency: >Beta 200 @ N/A microns & greater >Beta 1000 @ 4.5 microns & greater

Minimum Collapse Pressure: >10 bar

Tested to ISO2941 >145 psi

Dirt Holding Capacity acc. to ISO16889

52.4 gram @ 5 bar terminal pressure drop52.4 gram @ 73 psi terminal pressure drop

