



Interchange Element Data Sheet

Data sheet created using the Parker Par Fit Toolkit software.

 Creation Date:
 03/08/2018


 Datasheet No:
 DS101W

 Parker Part No:
 933218Q

 OEM:
 Pall

 OEM Part No:
 HC8900FKP26H&Z

Product Dimensions			
A (mm)	96.0	(inch)	3.78
B (mm)	56.5	(inch)	2.22
D (mm)	96	(inch)	3.78
E (mm)	652.0	(inch)	25.67

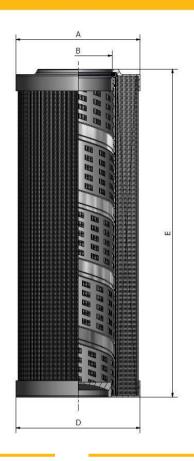



Construction Materials		
Seal(s):	FPM: Fluoroelastomer	
Top Endcap:	Glass reinforced nylon or mil	
Bottom Endcap:	Glass reinforced nylon or mil	
Inner Support Cylinder:	Mild steel tin plated	
Filter Media:	Multilayer fibreglass with coated mesh on both sides	

Calculated Performance Criteria

 Differential Pressure (Δp):
 0.31 bar @ 1000 l/min

 Tested to ISO3968 @ 32 cSt
 4.50 psi @ 219.97 gp

Efficiency: >Beta 200 @ N/A microns & greater >Beta 1000 @ 4.5 microns & greater

Callanas Brassauras 20 han

Minimum Collapse Pressure: >20 bar
Tested to ISO2941 >290 psi

Dirt Holding Capacity acc. to ISO16889

>433.6 gram @ 7 bar terminal pressure drop >433.6 gram @ 102 psi terminal pressure drop

