



Interchange Element Data Sheet

Data sheet created using the Parker Par Fit Toolkit software.

 Creation Date:
 03/08/2018


 Datasheet No:
 DS1564W

 Parker Part No:
 937167Q

 OEM:
 Pall

 OEM Part No:
 HC8304FKP16H

Product Dimensions			
A (mm)	154.5	(inch)	6.08
B (mm)	95.0	(inch)	3.74
C (mm)	98.5	(inch)	3.88
D (mm)	154.5	(inch)	6.08
E (mm)	368.0	(inch)	14.49

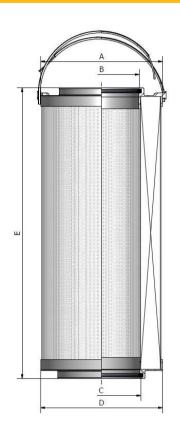



Construction Materials			
Seal(s):	FPM: Fluoroelastomer		
Top Endcap:	Glass reinforced nylon		
Bottom Endcap:	Glass reinforced nylon		
Filter Media:	Multilayer fibreglass with coated mesh on both sides		

Calculated Performance Criteria

 Differential Pressure (Δp):
 0.30 bar @ 300 l/min

 Tested to ISO3968 @ 32 cSt
 4.35 psi @ 65.99 gpm

Efficiency: >Beta 200 @ N/A microns & greater

>Beta 1000 @ 4.5 microns & greater

Minimum Collapse Pressure: >10 bar Tested to ISO2941 >145 psi

Dirt Holding Capacity acc. to ISO16889

