


Interchange Element Data Sheet

Data sheet created using the Parker Par Fit Toolkit software.

Creation Date:	03/08/2018
Datasheet No:	DS882W
Parker Part No:	938213Q
OEM:	Internormen / Eaton
OEM Part No:	01.E631.25VG.16.S.V

Product Dimensions

A (mm)	102.0	(inch)	4.02
C (mm)	63.5	(inch)	2.50
D (mm)	102	(inch)	4.02
E (mm)	312.0	(inch)	12.28

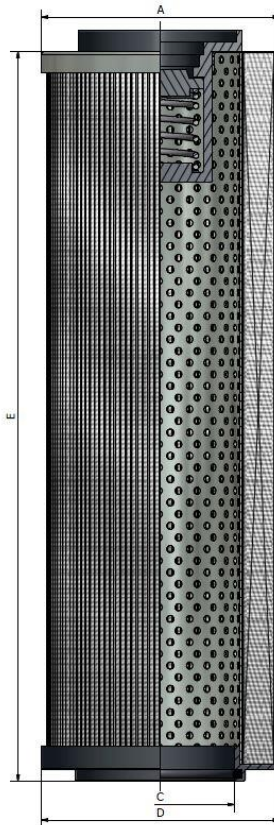

Construction Materials

Seal(s):	FPM: Fluoroelastomer
Top Endcap:	Mild steel tin plated
Bottom Endcap:	Glass reinforced nylon
Inner Support Cylinder:	Mild steel tin plated
Filter Media:	Multilayer fibreglass with coated mesh on both sides

Calculated Performance Criteria

Differential Pressure (Δp):	0.37 bar @ 1000 l/min
Tested to ISO3968 @ 32 cSt	5.37 psi @ 219.97 gp
Efficiency:	>Beta 200 @ 20 microns & greater >Beta 1000 @ 22 microns & greater
Minimum Collapse Pressure:	>15 bar
Tested to ISO2941	>218 psi
Dirt Holding Capacity acc. to ISO16889	>96.0 gram @ 7 bar terminal pressure drop >96.0 gram @ 102 psi terminal pressure drop