


Interchange Element Data Sheet

Data sheet created using the Parker Par Fit Toolkit software.

Creation Date:	03/08/2018
Datasheet No:	DS918W
Parker Part No:	938249Q
OEM:	Internormen / Eaton
OEM Part No:	01.NL.40.25VG.HR.E.

Product Dimensions

A (mm)	44.5	(inch)	1.75
B (mm)	22.1	(inch)	0.87
D (mm)	44.5	(inch)	1.75
E (mm)	99.0	(inch)	3.90

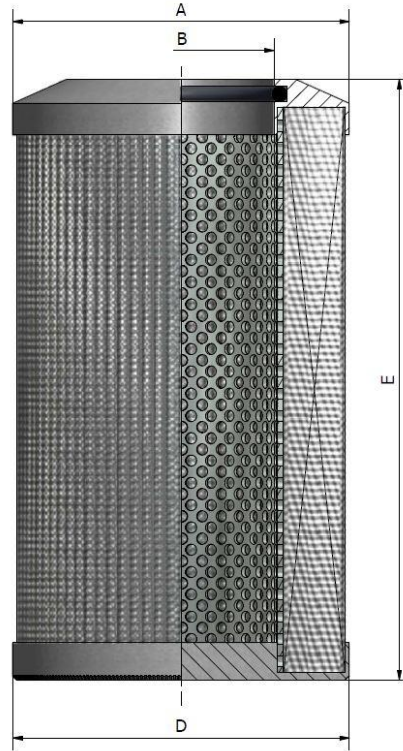

Construction Materials

Seal(s):	FPM: Fluoroelastomer
Top Endcap:	Mild steel tin plated
Bottom Endcap:	Steel tin plated
Inner Support Cylinder:	Mild steel tin plated
Filter Media:	Multilayer fibreglass with coated mesh on the inflow side and stainless steel mesh on the outlet side

Calculated Performance Criteria

Differential Pressure (Δp):	0.40 bar @ 75 l/min
Tested to ISO3968 @ 32 cSt	5.73 psi @ 16.50 gpm
Efficiency:	>Beta 200 @ 20 microns & greater >Beta 1000 @ 22 microns & greater
Minimum Collapse Pressure:	>210 bar
Tested to ISO2941	>3046 psi
Dirt Holding Capacity acc. to ISO16889	>8.1 gram @ 7 bar terminal pressure drop >8.1 gram @ 102 psi terminal pressure drop