



Interchange Element Data Sheet

Data sheet created using the Parker Par Fit Toolkit software.

 Creation Date:
 03/08/2018


 Datasheet No:
 DS1109W

 Parker Part No:
 938327Q

 OEM:
 MP Filtri

 OEM Part No:
 HP0372A10VN&AN

| Product Dimensions | | | |
|--------------------|-------|--------|------|
| A (mm) | 42.0 | (inch) | 1.65 |
| B (mm) | 22.8 | (inch) | 0.90 |
| D (mm) | 42 | (inch) | 1.65 |
| E (mm) | 179.0 | (inch) | 7.05 |

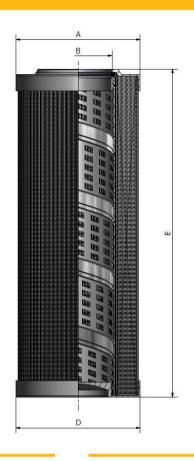



| Construction Materials | | |
|-------------------------|--|--|
| Seal(s): | FPM: Fluoroelastomer | |
| Top Endcap: | Mild steel tin plated | |
| Bottom Endcap: | Mild steel tin plated | |
| Inner Support Cylinder: | Mild steel tin plated | |
| Filter Media: | Multilayer fibreglass with coated mesh on both sides | |

Calculated Performance Criteria

Differential Pressure (Δp):0.55 bar @ 150 l/minTested to ISO3968 @ 32 cSt7.90 psi @ 33.00 gpm

Efficiency: >Beta 200 @ 10 microns & greater

>Beta 1000 @ 12 microns & greater

Minimum Collapse Pressure: >20 bar Tested to ISO2941 >290 psi

Dirt Holding Capacity acc. to ISO16889

>11.7 gram @ 7 bar terminal pressure drop >11.7 gram @ 102 psi terminal pressure drop

