


Interchange Element Data Sheet

Data sheet created using the Parker Par Fit Toolkit software.

Creation Date:	03/08/2018
Datasheet No:	DS956W
Parker Part No:	PR4467
OEM:	Argo
OEM Part No:	V2.1217-08

Product Dimensions

A (mm)	118.0	(inch)	4.65
B (mm)	59.5	(inch)	2.34
C (mm)	59.5	(inch)	2.34
D (mm)	118.0	(inch)	4.65
E (mm)	166.0	(inch)	6.54

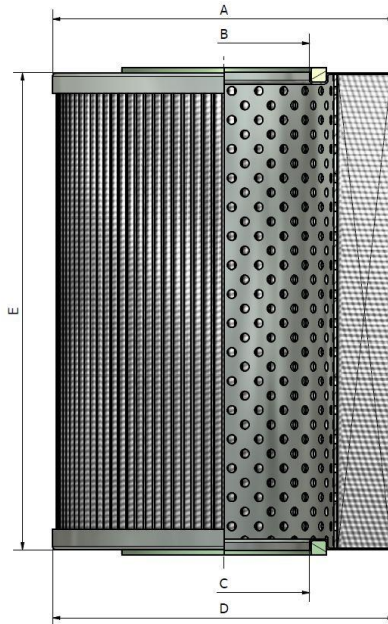

Construction Materials

Seal(s):	FPM: Fluoroelastomer
Top Endcap:	Mild steel zinc plated
Bottom Endcap:	Mild steel zinc plated
Inner Support Cylinder:	Mild steel zinc plated
Outer Support Cylinder:	Mild steel tin plated
Filter Media:	Multilayer fibreglass with coated mesh on both sides

Calculated Performance Criteria

Differential Pressure (Δp):	0.40 bar @ 500 l/min
Tested to ISO3968 @ 32 cSt	5.80 psi @ 109.98 gp
Efficiency:	>Beta 200 @ 20 microns & greater >Beta 1000 @ 22 microns & greater
Minimum Collapse Pressure:	>10 bar
Tested to ISO2941	>145 psi
Dirt Holding Capacity acc. to ISO16889	31.0 gram @ 4 bar terminal pressure drop 31.0 gram @ 58 psi terminal pressure drop